


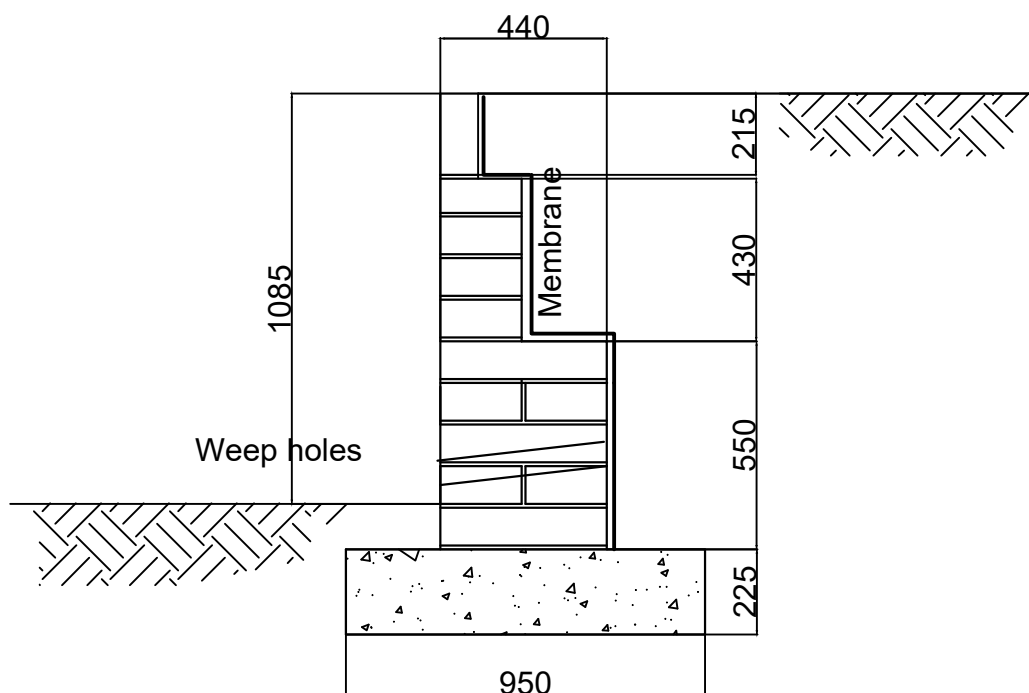

Notes:

1. Width of base of wall to be no less than $\frac{1}{3}$ of it's height
2. Concrete to be 1:2:4 (1 cement, 2, sand, 4 aggregate)
3. Dense concrete blocks (7N) to be used
4. Weep holes to be a minimum 65 x 65 uPVC at 2400 centres.
5. A waterproof membrane, heavy duty polythene or similar, to be placed against the back of the wall.
6. Immediately against the membrane shall be placed free draining rubble to enable surface water to enter the weepholes.
7. Steps to be constructed of concrete blocks with a nominal rise of 200 and a going of 440.

Mr and Mrs Astley
8 Brickfield Crescent
Twynyrodyn
Merthyr Tydfil
CF47 0DW

Details of wall
construction at A

Dwg: SA07
Scale 1:20
April 2022
Drawn DWA