





ILICONE SCRAPPED TEXTURE

...THE PERFECT FINISH

K Rend LT	Silicone K1	K Rend LW1	K1 Spray
cone FT incorporates some technology and gives a fine texture finish quite: 40 / sq m approx. nominal 18mm thickness er Base Coat Require: 40 / sq m approx. nominal 18mm thickness Kitemark Classifications: Compressive Strength: CS IV Capillary Water Absorption Category: W2 Thermal Conductivity: P=50% - 0.03	Silicone K1 incorporates silicone technology. It is suitable for use with most render spray machines. It is ideal for larger projects where the speed of machine application can offer time saving benefits. Suitable for Rend application also. One coat Require: 1.8 kg / mm thick / sq m nominal 18 - 20mm thickness Kitemark Classifications: Compressive strength: CS II Capillary Water Absorption Category: W2 Thermal Conductivity: P=50% - 0.30	K Rend LW1 is a lightweight, cement based and polymer modified self-coloured render, which can be applied directly onto a wide range of masonry and external wall insulation (EWI) substrates. K Rend LW1 can be used to achieve a variety of finishes. One coat Require: 20 - 25kg / sq.m approx. on masonry substrates. Nominal 18-20mm thickness for masonry substrates. (Medium finished render thickness = 16mm) 15 - 20kg / sq.m approx. on insulation substrates. Nominal 12 - 15mm thickness for insulation substrates. (Medium finished render thickness = 12mm) Kitemark Classifications: Compressive strength: CS III Capillary Water Absorption Category: W2 Thermal Conductivity: P=50% - 0.30	K1 Spray is designed for use with most render spray machines. It is ideal for larger projects where the speed of machine application can offer time saving benefits. Suitable for hard application also. One coat Require: 20 - 22kg / sq.m approx. nominal 16 - 20mm thickness Kitemark Classifications: Compressive Strength: CS II Capillary Water Absorption Category: W2 Thermal Conductivity: P=50% - 0.04
			
White*	Buttermilk	Polar White*	Stone
York	Green*	Powder Blue	Salmon Pink
Terracotta	Grey	Ivory	Sterling White
Arran	Champagne	Pewter Grey	Champagne

COLOUR NOTE

- While is the brightest white within the Scraped Texture range, however it is not brilliant white
- Polar White is an off white shade
- Green has a yellow tone to it



Above: 20 standard Scraped Texture colours. Special colours are available from a customisable palette, upon request from our Technical Support Centre.

All full colour illustrations shown in the brochure are as accurate as the printing process will allow. It is important that a sample is obtained as we recommend colours be verified against K Rend Scraped Texture samples before ordering.




Plastering Test Panel

For all products it is recommended that a test panel (ideally 2m²) be produced for inspection by the customer (client, architect, etc.). Work should not commence until the customer is satisfied with the texture and general appearance of the product. The test panel should be prepared well in advance of work commencing. Application should be similar with product water requirement, handling characteristics, setting and hardening times. These may vary according to background, temperature and humidity.

NOTE: For all products "Requie" figures are approximate, take no account of wastage and may vary according to substrate and application technique.

K Rend is manufactured using natural raw materials. Subtle texture and colour variations may occur during the application process. It is recommended products are selected from actual samples. Large site samples are available which can be applied under normal site conditions to give a representative sample.

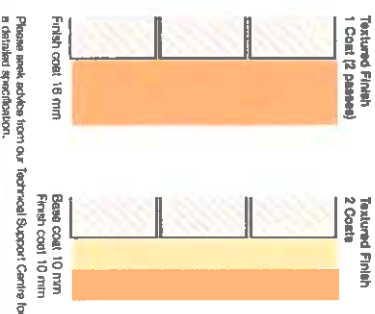

Please seek advice from our Technical Support Centre for a detailed specification.



