


DIMENSIONS

Single-loop connection

Measurements in mm.

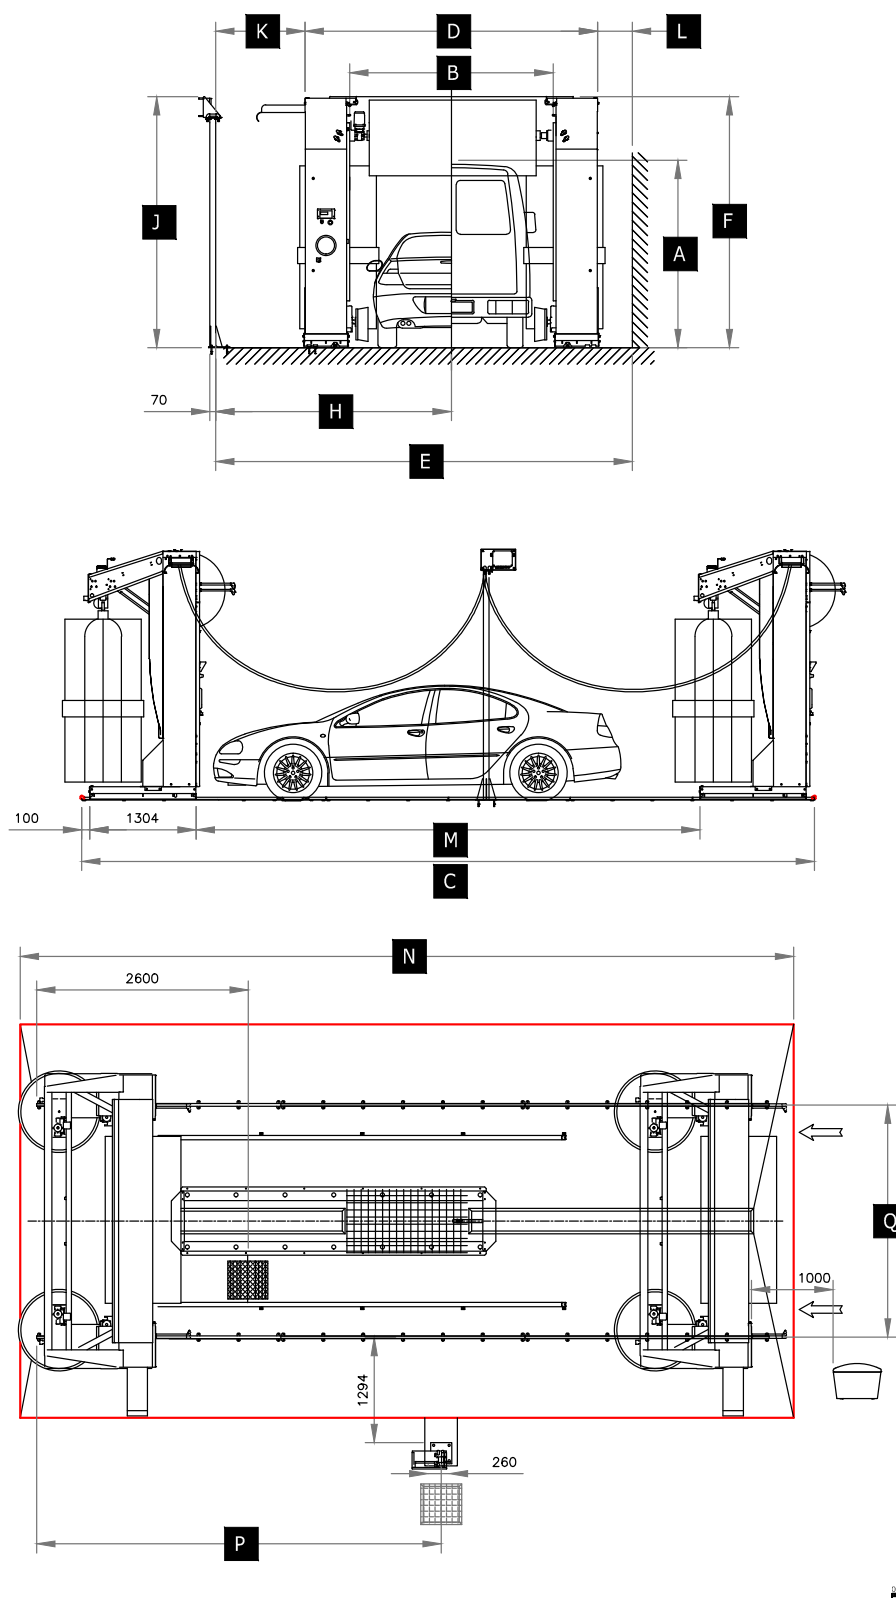

The distance between the underside of the foot and the floor must not exceed 10 mm.
If the space **K** or **L** is smaller than recommended (500 mm), you will need to install the anti-smashing system and wire or rubber switch.

A	Max. vehicle height		2300	
B	Max. vehicle width		2500	
C	Rail length		9000	10000
D	Chassis width	no wheelwash	3637	3637
		with wheelwash	3647	3647
E	Recommended width		5209	5209
F	Chassis height		3083	3083
H	Recommended width		2896	2896
J	Height service line		3080	3080
K	Recommended width		1100	1100
L	Recommended		500	500
	Minimum		200	200
M1	Max. vehicle length with vertical and horizontal scrub		5320	6320
M2	Max. vehicle length with horizontal scrub only		6500	7500
N	Bay length		9500	10500
P	Width post centre		4970	5470
Q	Between centres of rails		2854	2854

Measurements in mm.