

Areaflood Pro 2

THORN

AFP2 2L 288L70 727 EWR NONE CL1 GY




Areaflood Pro 2

A compact, lightweight, general purpose LED area floodlight. With large x 2 body. LED converter driving 288 LEDs at 700mA with Extra Wide Road distribution light distribution. IP66, IK08, Class I electrical. Body: die-cast aluminium (EN AC-44300), Light grey 150 sanded textured (close to RAL9006).. Enclosure: 5mm thick toughened glass. Reversible mounting stirrup supplied, Complete with 2700K LED.


Dimensions: 780 x 722 x 116 mm
 Luminaire input power: 585 W
 Luminaire luminous flux: 77284 lm
 Luminaire efficacy: 132 lm/W
 weight: 29.1 kg
 Scx: 0.136 m²CL1: CL1: Earthed



TLG_AFP2_F_2L_1.jpg

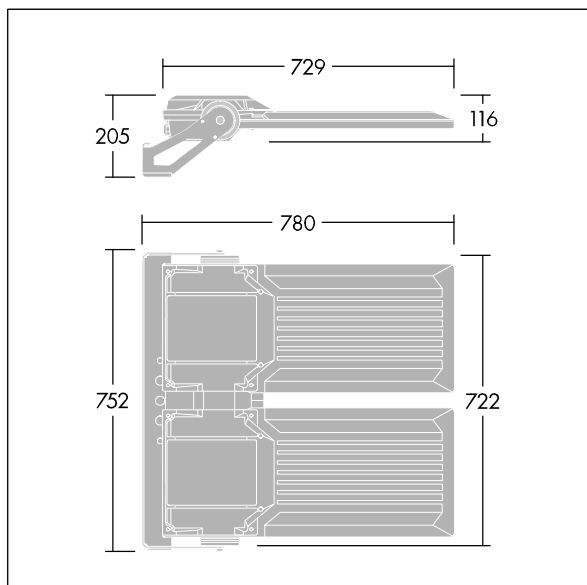

TLG_AFP2_M_2L.wmf

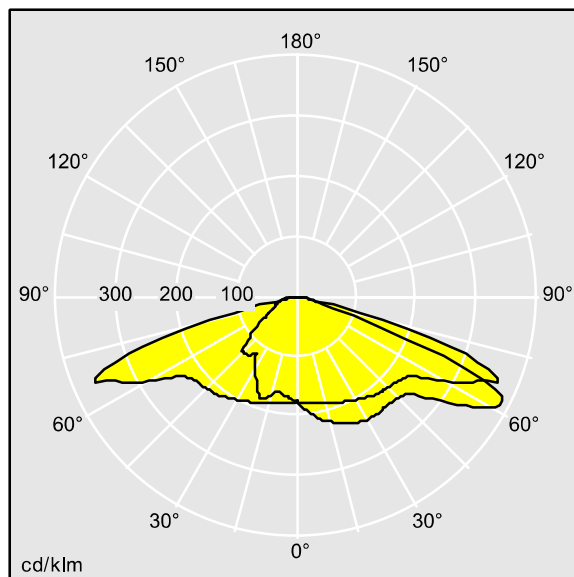

Light Source: LED
 Luminaire luminous flux*: 77284 lm
 Luminaire efficacy*: 132 lm/W
 Colour Rendering Index min.: 70
 LOR: 1,00 ULOR: 0,00 DLOR: 1,00

Ballast: 3 x 87500827 LCO 200/200-1050/355 NF C
 ADV3
 Correlated colour temperature*: 2700 Kelvin
 Chromaticity tolerance (initial MacAdam): 5
 Rated median useful life*: L95 100000h at 25°C
 Luminaire input power*: 585 W Power factor = 0.95

This product contains light sources of energy efficiency classes D, E.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
 © Thorn Lighting