

EyeKon LED

THORN

EYE VS LED1000-827 HF L ANT E3TX

LED 16W EYKL_VSLHO3K	EN 55015	IP65	IK10	⏏	CE	⚡	EAC	⚡	850 °C	T _a - 20 +35	
----------------------	----------	------	------	---	----	---	-----	---	--------	-------------------------	--


EyeKon LED

Round, impact resistant LED bulkhead luminaire.
Electronic, fixed output control gear. Class I electrical, IP65, IK10. Body: large size, die-cast aluminium (LM6), powder coated anthracite. Diffuser: opal polycarbonate with die-cast aluminium visor feature. Electrical connection via 3 x 2 x 2.5mm² terminal block. Complete with 2700K LED


Dimensions: Ø340 x 155 mm

Luminaire input power: 16 W


Weight: 3.5 kg

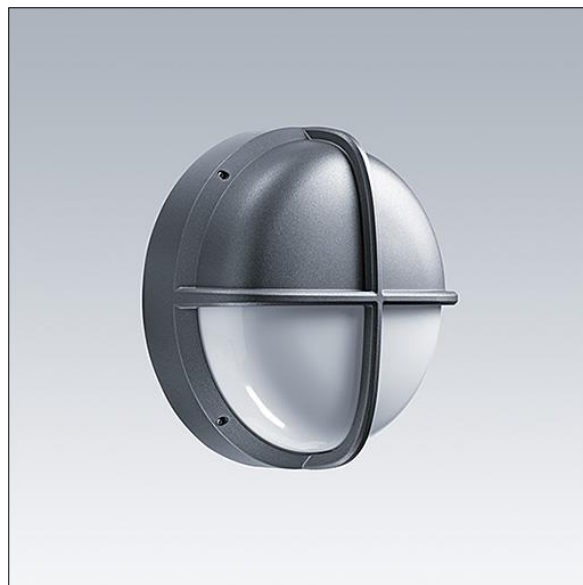

TLG_EYKN_F_LGVSANTHOP.jpg

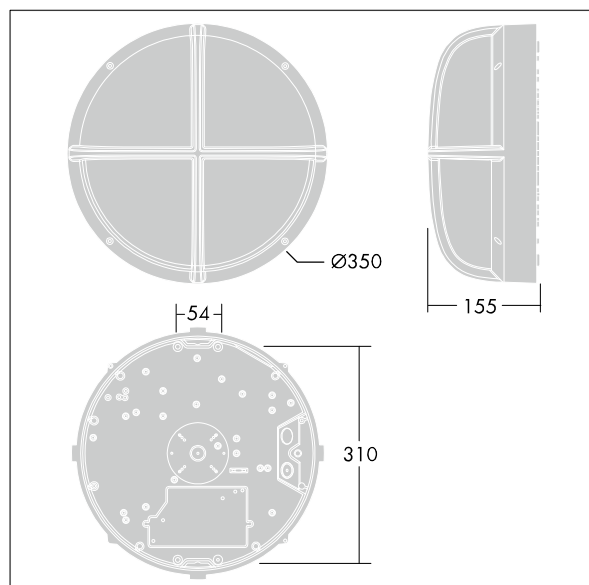

TLG_EYKN_M_LGE.wmf

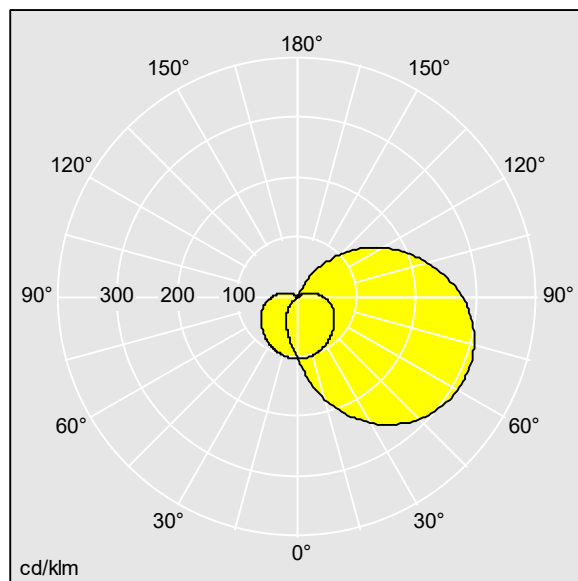

TLG_SP_0042780.idt

Lamp position: STD - standard

Light Source: LED

Luminaire luminous flux*: 900 lm

Luminaire efficacy*: 56 lm/W

Colour Rendering Index min.: 80

Ballast: 1 x 87500566 DRV TR LDE 20W 500A 240V F

Correlated colour temperature*: 2700 Kelvin

Chromaticity tolerance (initial MacAdam): 3

Rated median useful life*:

L90 50000 h at 25 °C

Luminaire input power*: 16 W

Dimming: FO

LOR: 1,00 ULOR: 0,30 DLOR: 0,70

This product contains a light source of energy efficiency class C.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting