

LipuMax-P-B

Product information for the product group



ACO Product benefits

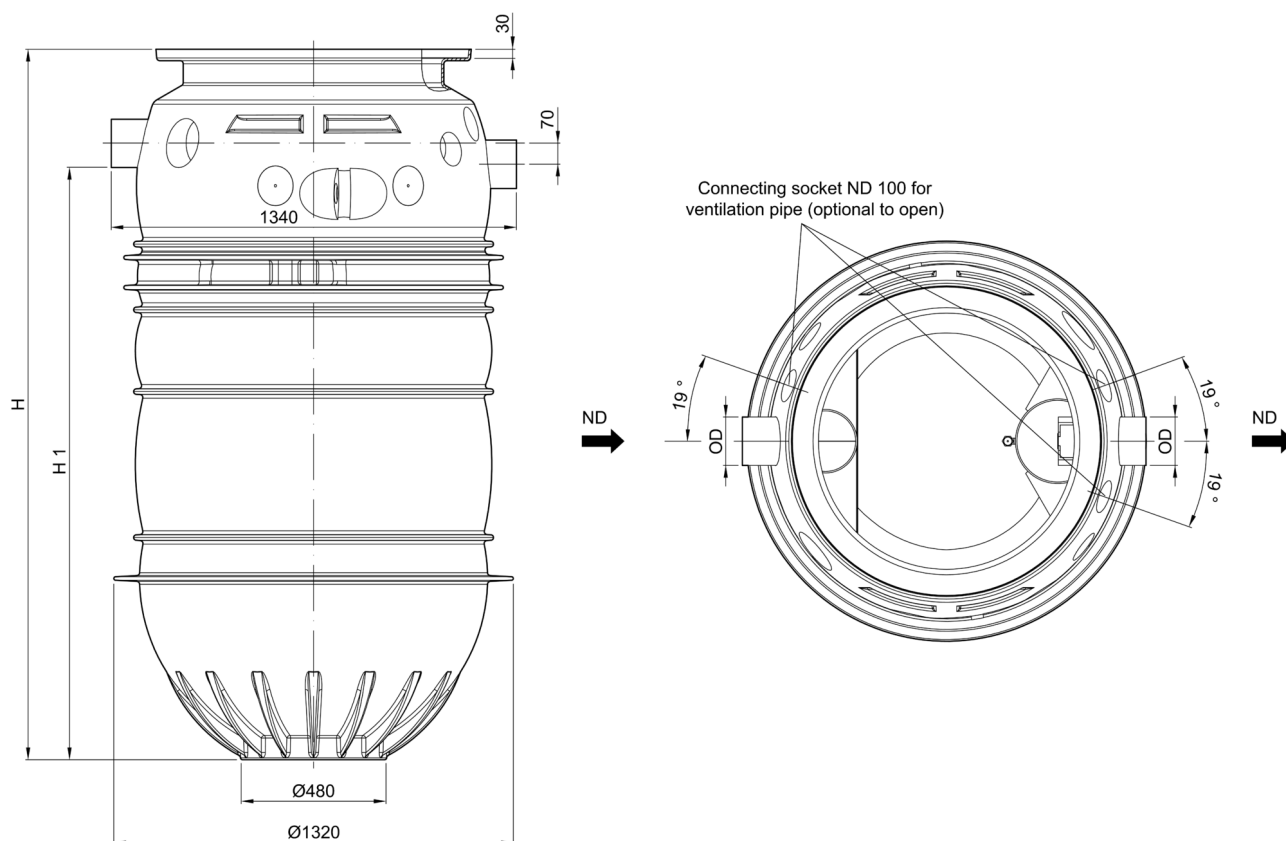
- For gully top designs for load class D 400, shaft has buoyancy safety up to the upper side of the shaft manhole cover without need for on-site concrete castings.
- Proven stability: 50 years

- Grease separator plant as per DIN EN 1825 and DIN 4040-100
- For underground installation
- Emptying and cleaning via shaft manhole cover
- System ACO Passavant
- Building Supervisory Authority approval Z-54.1-509
- Suitable top sections
- Top sections

Item Technical Data 3207.80.00

Nominal capacity	Inlet/ Outlet	Contents			Weight
		Sludge trap [l]	Grease store [l]	Overall [l]	
NS 7	DN 150	730	285	1675	108




Dimensions



Nominal capacity	Sludge trap	Dimensions		
	[l]	D [mm]	H [mm]	H1 [mm]
NS 7	730	160	2346	1956

Accessories

	Description	Used with	Description	Item number
	Extension 450	■ Sampling shaft	■ Made from plastic, material polyethylene ■ For fitting on upstream shaft for deep installations ■ Structure height: 100 – 650 mm (can be reduced to 45 mm by cutting off at cutting marks) ■ Max. two extension can be used ■ Weight: 8.8 kg	3300.13.00

	Description	Used with	Description	Item number
	Grease layer thickness measuring device	- Grease separator LipuMax-P for underground installation - Stach separator FapuMax-P for underground installation	- For electronic measurement of layer of grease - Suitable for liquid and/or congealing grease - Measuring device with plug and used connecting cable, length: 3 m - With two voltage-free changeover contacts to display full warning (100 %) and advance warning of fill level (80 %) - With visual display of fill level for advance warning and full warning - With heated probe rod to increase reliability of operation - Operating voltage: 230 V/50 Hz - Max consumption approx. 12 W	
			Cable length: 10 mWeight: 6.4 kg	3300.11.70
			Cable length: 20 mWeight: 7.8 kg	3300.11.71
			Cable length: 30 mWeight: 9.6 kg	3300.11.72
	Storage	- Grease separator LipuMax-P for underground installation - Stach separator FapuMax-P for underground installation	- Made from concrete - Diameter: 625 mm - Thickness: 60 mm - Without seal - Displacement-proof - Height 60 mm excluding mortar joints 70 mm including mortar joints - Weight: 50 kg	8700.20.00
	Storage	- Grease separator LipuMax-P for underground installation - Stach separator FapuMax-P for underground installation	- Made from concrete - Diameter: 625 mm - Thickness: 80 mm - Without seal - Displacement-proof - Height 80 mm excluding mortar joints 90 mm including mortar joints - Weight: 60 kg	8700.20.10
	Storage	- Grease separator LipuMax-P for underground installation - Stach separator FapuMax-P for underground installation	- Made from concrete - Diameter: 625 mm - Thickness: 100 mm - Without seal - Displacement-proof - Height 100 mm excluding mortar joints 110 mm including mortar joints - Weight: 70 kg	8700.20.20

You can find further accessories under → /32078000