



Material Key:


- 1. Concrete pad
- 2. 20mm painted render on 100mm thick blockwork
- 3. Timber Doors double stile
- 4. 120x40 C24 set at 450c/cs
- 5. 18mm OSB 3 board with glued down reinforced bitumen membrane on top dressed into
- 6. PVCu gutter and downpipe into soakaway
- 7. 25mm thick insulation quilt to be lined to walls, ceiling and across interior of door.

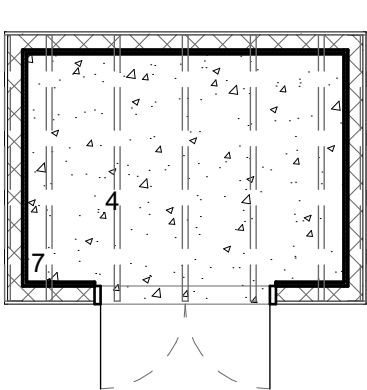


PLAN

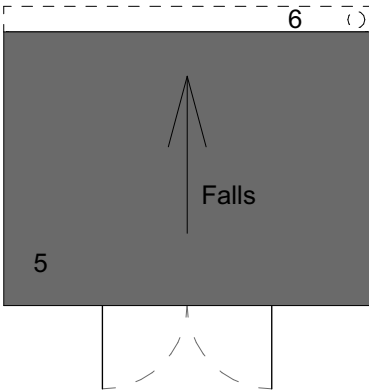


ROOF PLAN

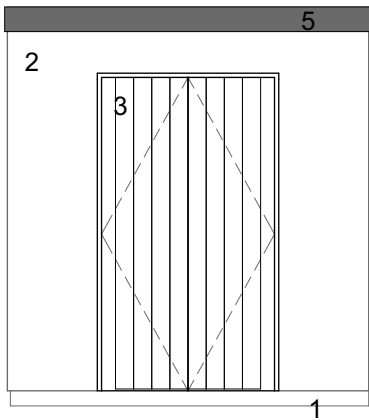


FRONT ELEVATION

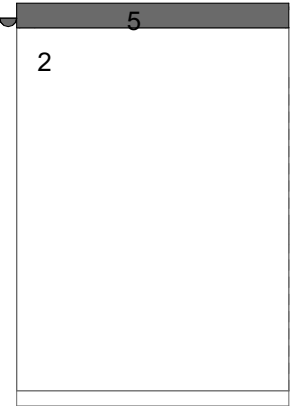

SIDE ELEVATION

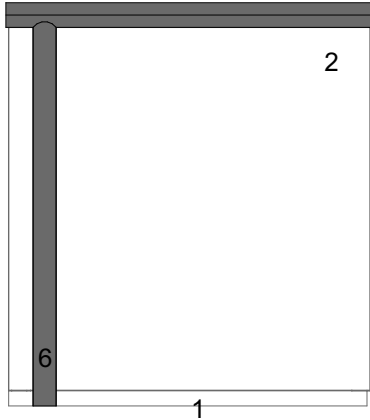

REAR ELEVATION

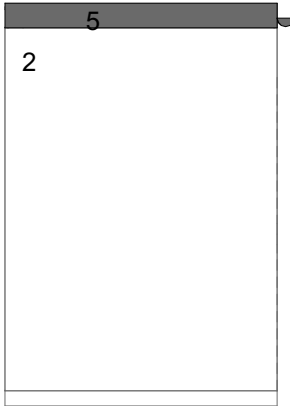

SIDE ELEVATION