

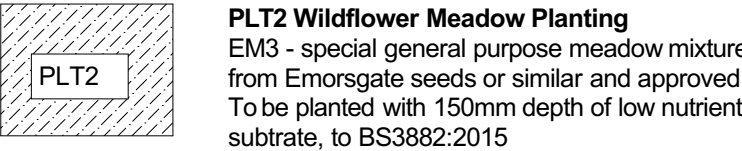
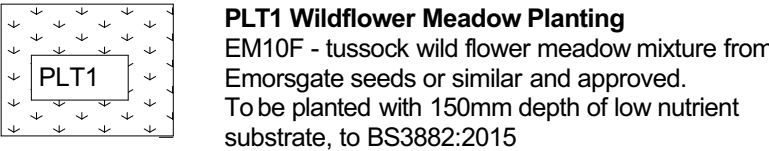


Key

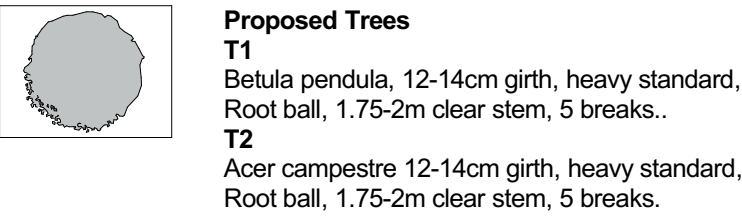

NOTES:
Boundary treatment to be developed during later design stages including a full topographical survey

Key: B = Bare-rooted and bagged
brks = Minimum no. of breaks or shoots
cc = Root volume in cubic centimetres
D = Diameter or spread
L = Container in litres
M = Mat
R = Roll
RB = Root-balled
RC = Root Collar (minimum) diameter in millimetres
1+1 = 2 year seedling transplanted after year 1
0/2 = 2 year cutting not transplanted
X/2/0 = 2 year graft not transplanted
2x = 2 times transplanted RB = Root-balled
Sept to April = optimum planting period excluding Dec to Feb

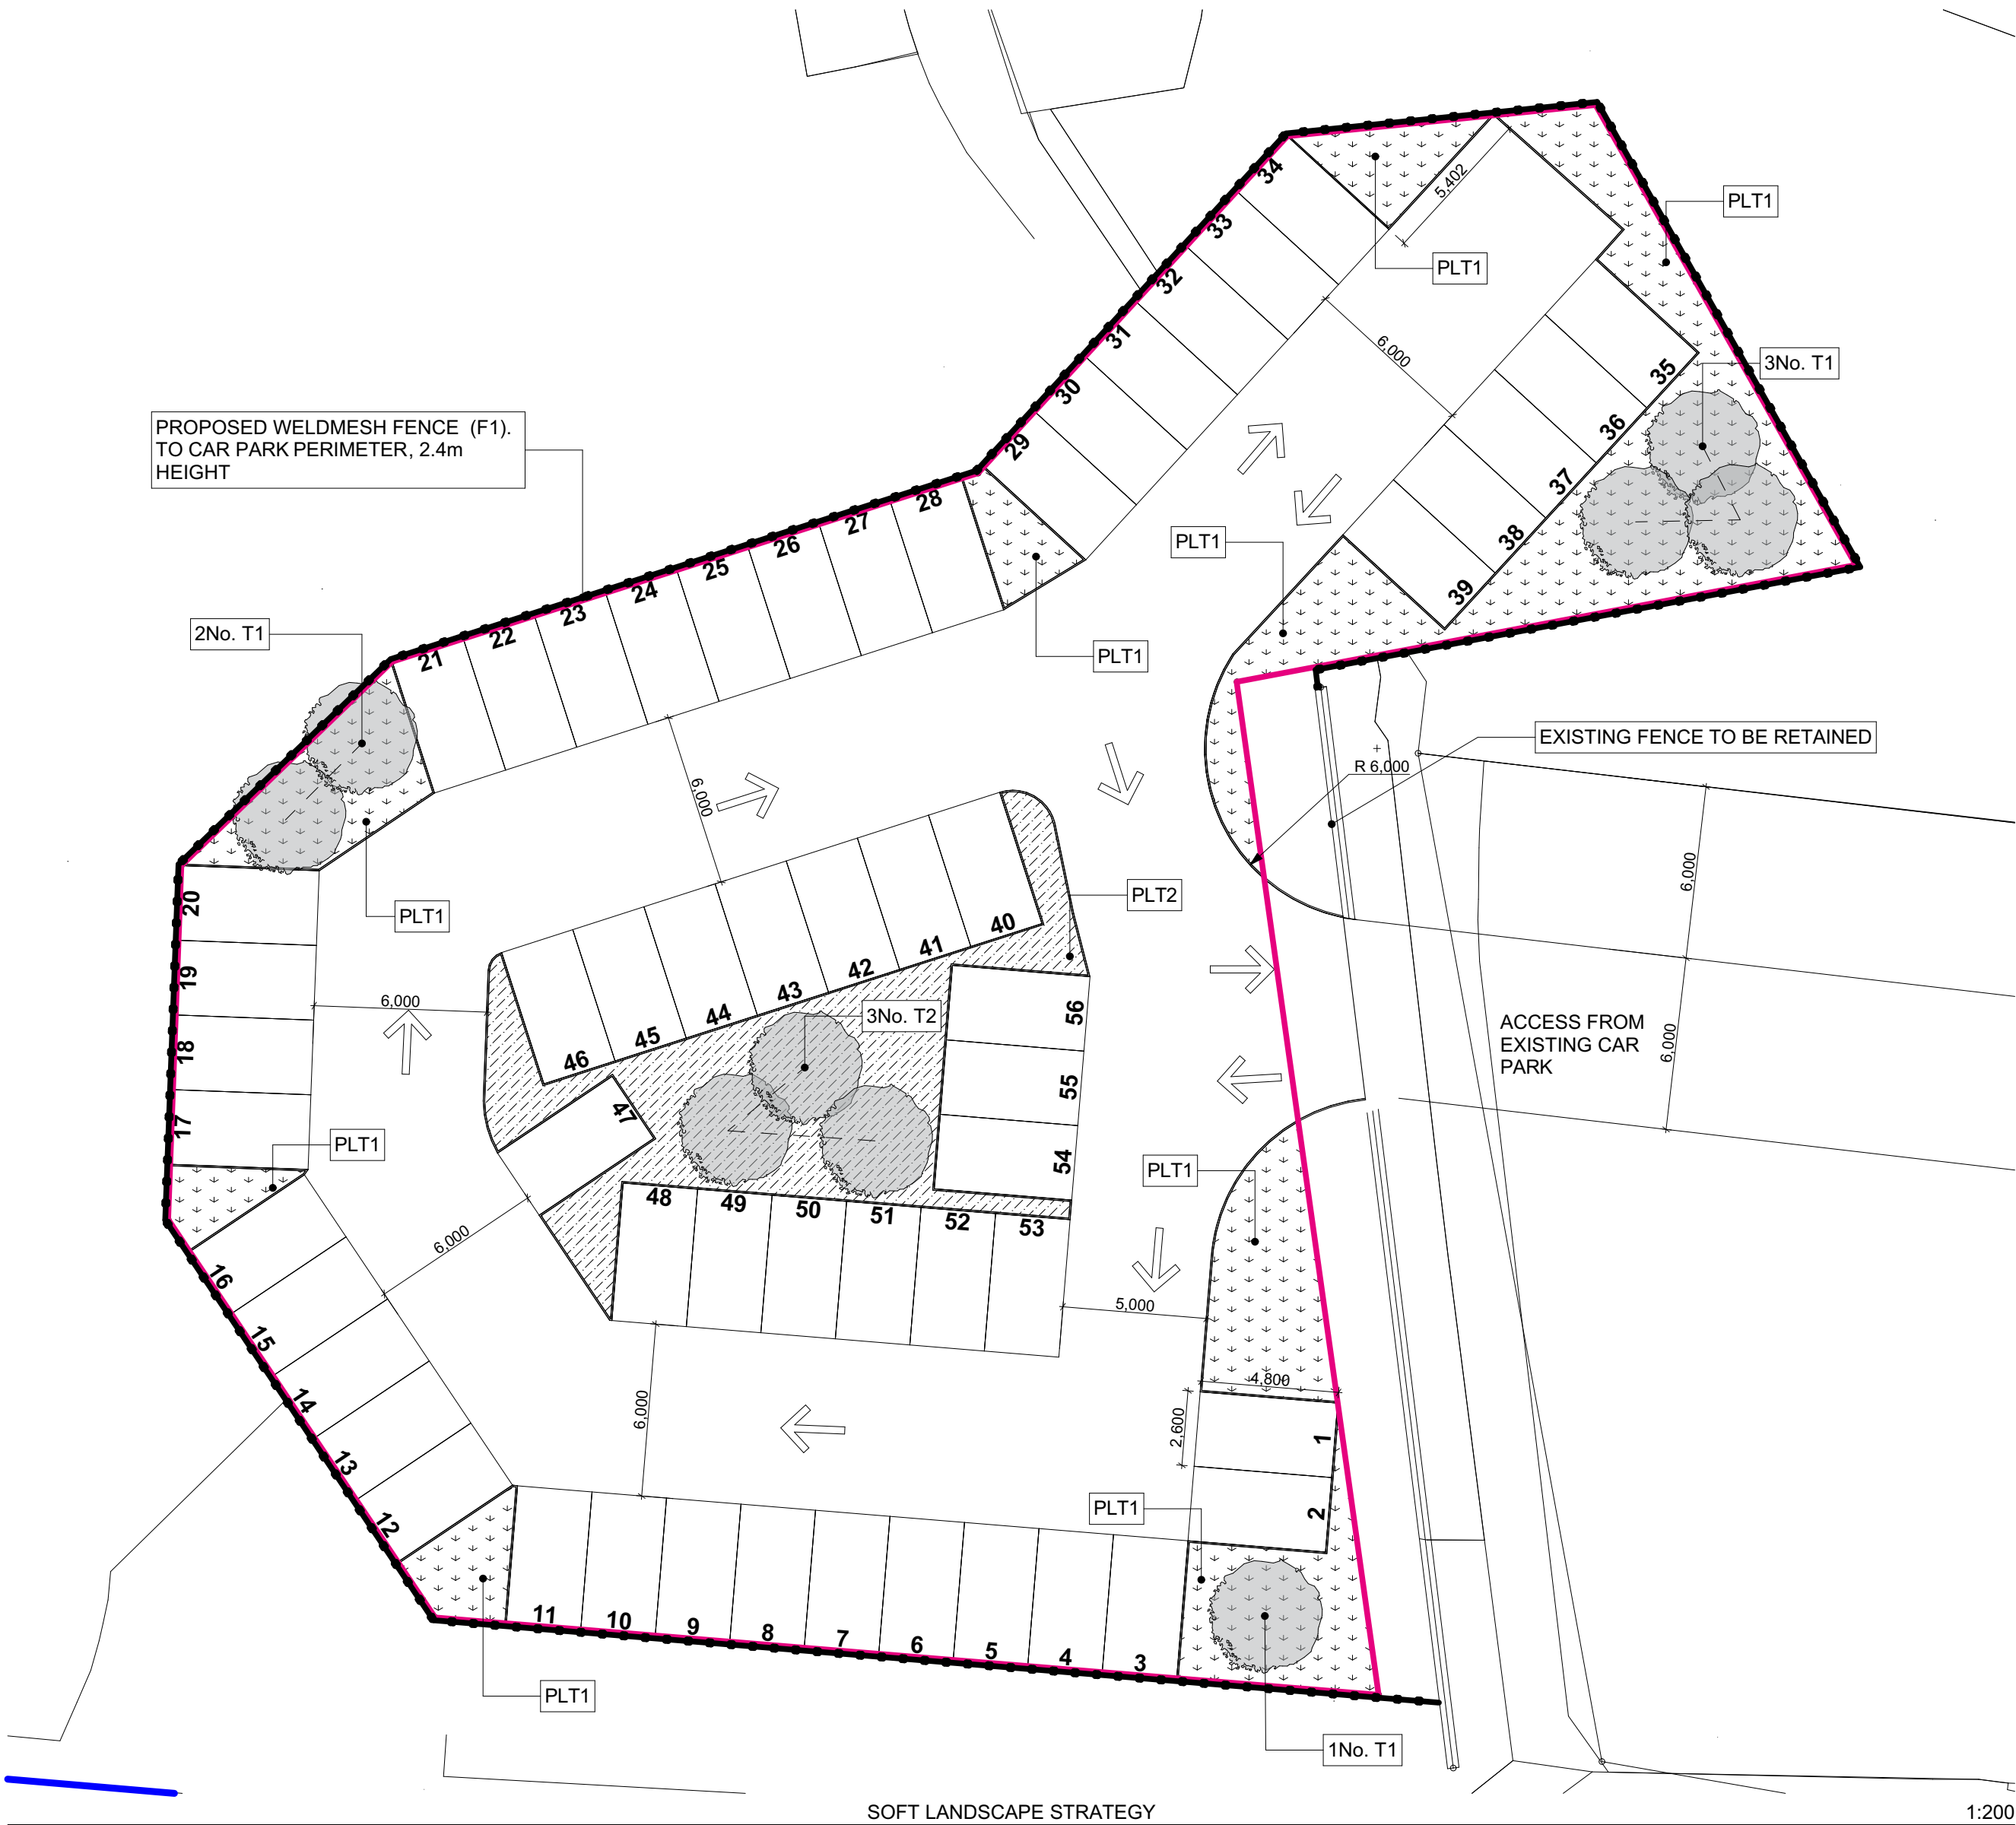

Proposed Trees

Abbrev.	Name	Girth/Dia. cm	Height cm	Root Zone	Specification	Qty
T1	Betula pendula	12-14	350-425	RB	3x; HS; clear stem 175-200cm; 5 brks	6
T2	Acer campestre	12-14	350-425	RB	3x; HS; clear stem 175-200cm; 5 brks	3
Sub-totals						9

Wild Flower Meadow Planting

Planting Code	Name	Area (m ²)	Sowing Rate (g/m ²)	Quantity (g)	Specification
PLT1	Wildflower Meadow Planting	254	4	1,016	EM10F - tussock wild flower meadow mixture from Emorsgate seeds or similar and approved.
PLT2	Wildflower Meadow Planting	108	4	432	EM3 - special general purpose meadow mixture from Emorsgate seeds or similar and approved.

PLANTING SCHEDULE

NTS



P2	30/07/2020	TREE SPECIES UPDATE	HV
P1	21/05/2020	ISSUED FOR INFORMATION	HV
Mark	Date	Details	By

Health Board:		CWM TAF MORGANNWG UHB Prince Charles Hospital Merthyr Tydfil Mid Glamorgan CF47 9DT
Supply Chain Partner:		INTERSERVE CONSTRUCTION LIMITED 138 HEOL-Y-GORS CWMBWRLA SWANSEA SA5 8LT

Supply Chain Partner:				INTERSERVE CONSTRUCTION LIMITED 138 HEOL-Y-GORS CWMBWRLA SWANSEA SA5 8LT	
Project Title:		PRINCE CHARLES HOSPITAL JOHNNY OWEN CAR PARK Prince Charles Hospital, Gurnos, Merthyr Tydfil. CF47 9DT.			

Drawing Status:		For Information
Drawing Originator:		HLM Architects

Drawing Title:		SOFT LANDSCAPE STRATEGY
Job No:		5005
Drawing No:		P003
Project Origin:		HLM
Volume:		V08
Level:		XX
Type:		DR
Discipline:		L
Number:		900804
Revision:		P2

Do NOT scale this drawing Refer to Architects for details of current building layouts		Phase:	Workstream:
1B		-	