


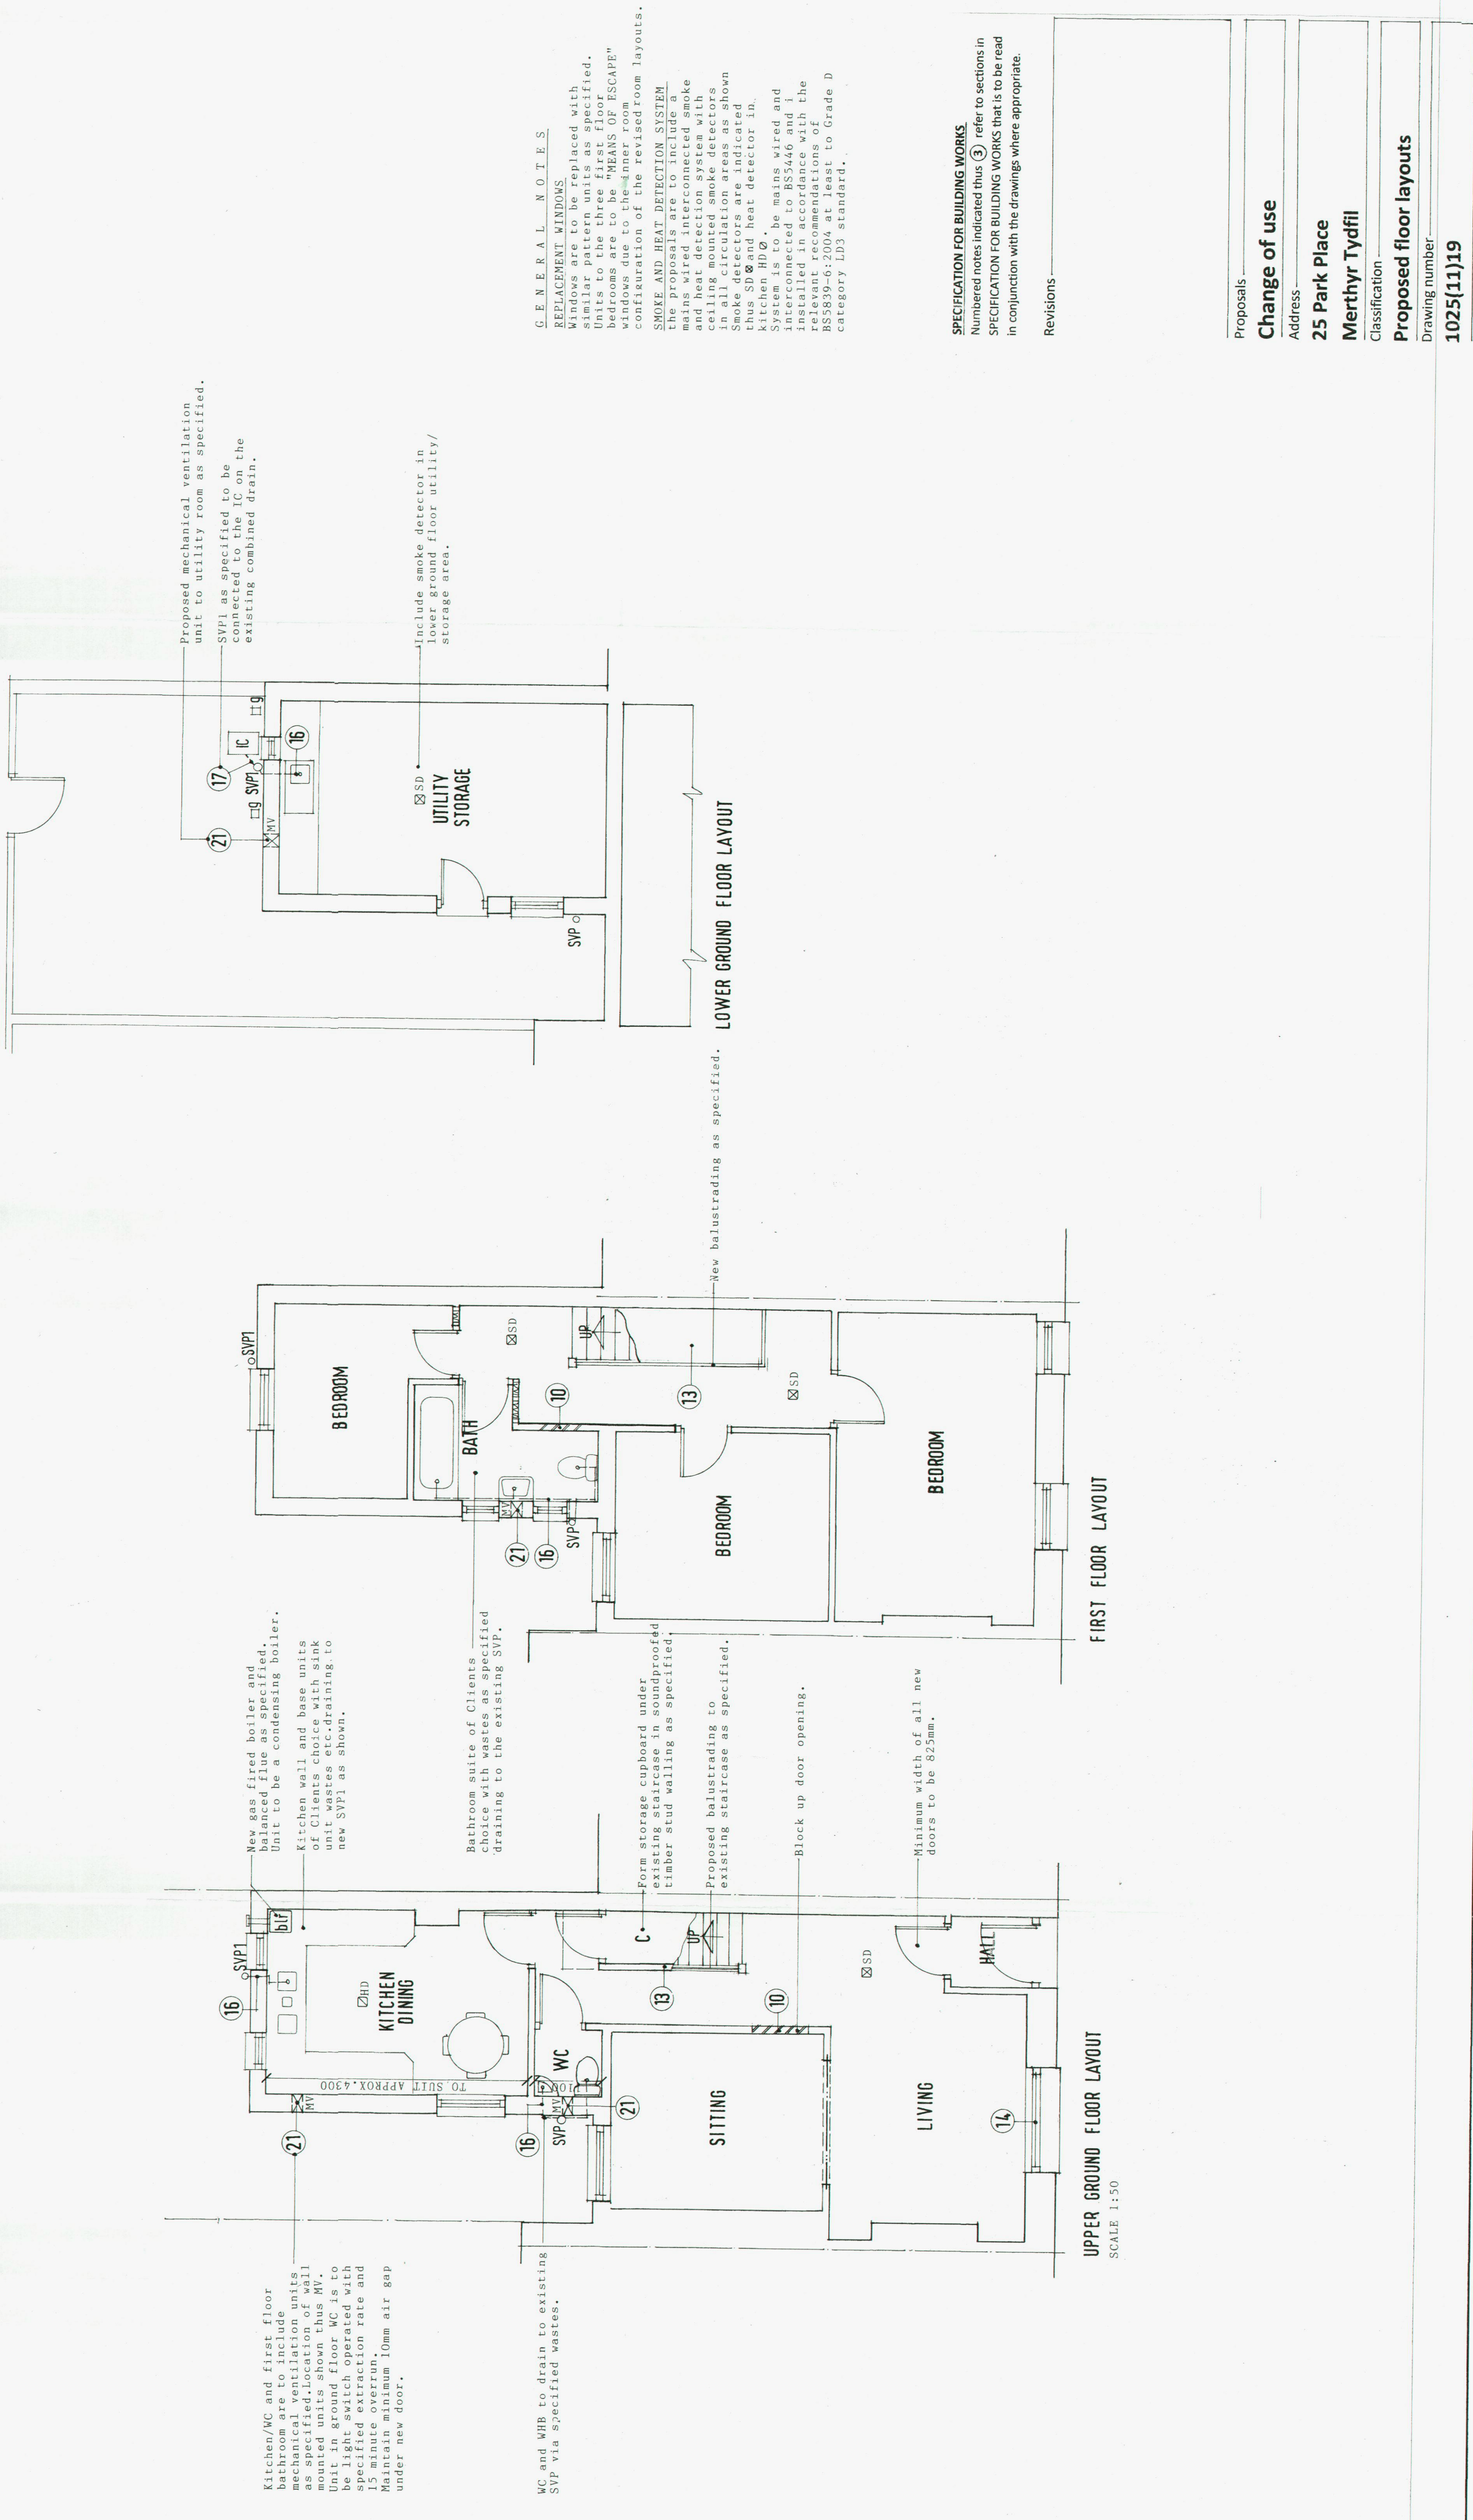

GENERAL NOTES.

REPLACEMENT WINDOWS
Windows are to be replaced with similar pattern units as specified. Units to the three first floor bedrooms are to be "MEANS OF ESCAPE" windows due to the inner room configuration of the revised room layouts.

SMOKE AND HEAT DETECTION SYSTEM
The proposals are to include a mains wired interconnected smoke and heat detection system with ceiling mounted smoke detectors in all circulation areas as shown. Smoke detectors are indicated thus SD and heat detector in kitchen HD.

System is to be mains wired and interconnected to BS5446 and 1. Installed in accordance with the relevant recommendations of BS5839-6:2004 at least to Grade D category LD3 standard.

SPECIFICATION FOR BUILDING WORKS
Numbered notes indicated thus ③ refer to sections in SPECIFICATION FOR BUILDING WORKS that is to be read in conjunction with the drawings where appropriate.

Revisions	
Proposals	
Change of use	
Address	
25 Park Place	
Merthyr Tydfil	
Classification	
Proposed floor layouts	
Drawing number	
1025(11)19	