



Rev.	Amendments	Date	Made By	Chk'd By

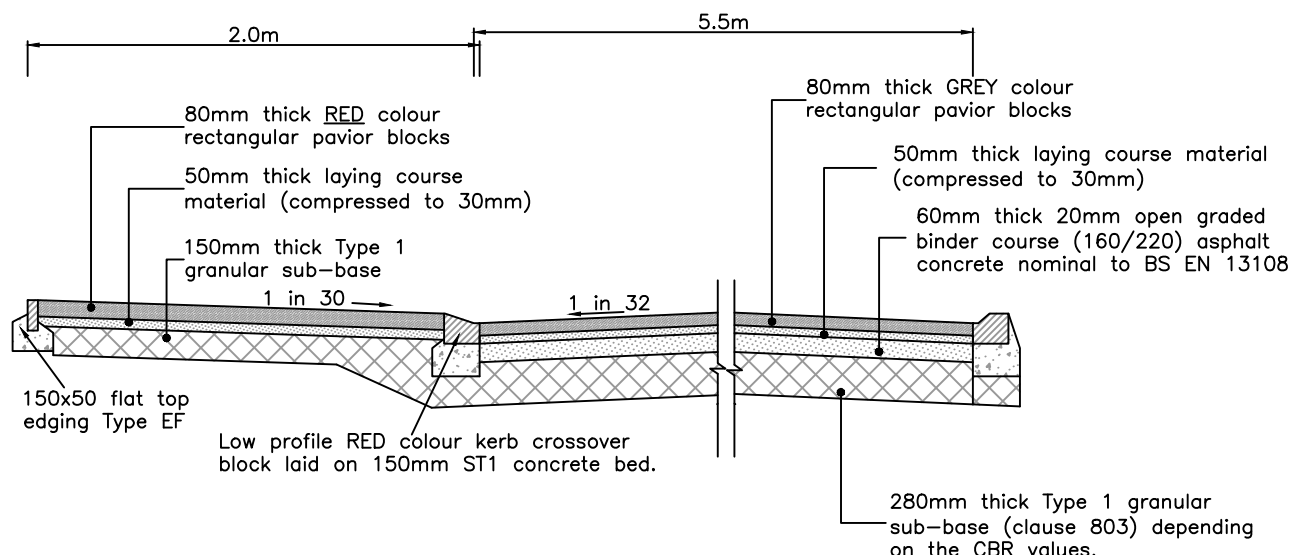

VEHICULAR CROSSOVER AND CARRIAGEWAY CONSTRUCTION

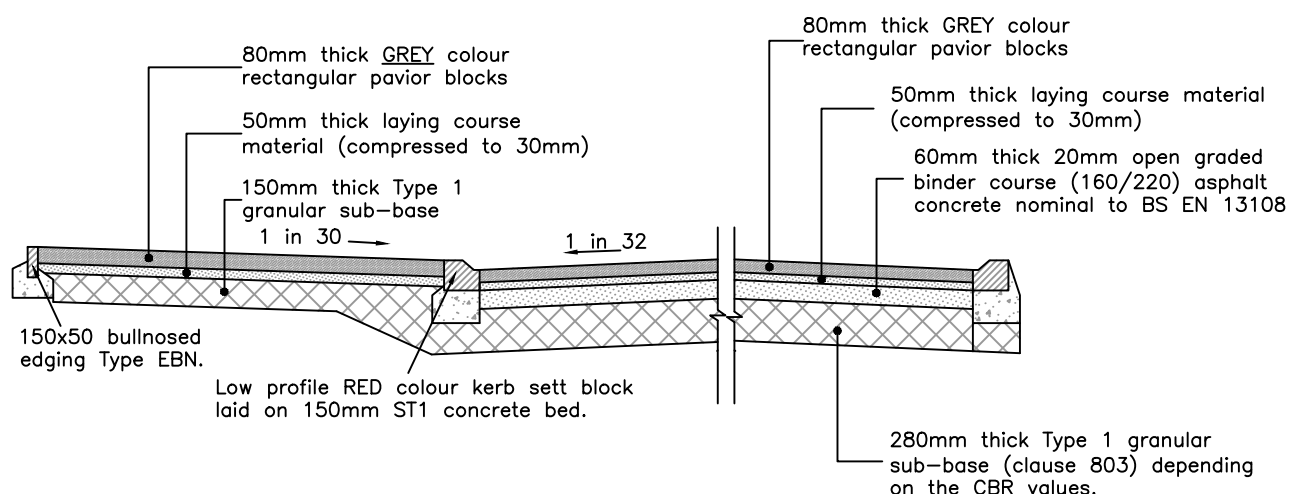

FOOTWAY AND CARRIAGEWAY CONSTRUCTION

NOTES

1. Minimum carriageway construction thickness to be 450mm.
2. All dimensions are in millimetres unless otherwise stated
3. Fine dry sand to BS 7533-3 (Annex D) to be vibrated into joints until joints are full.
4. Laying course material to BS 7533-3 (Annex D)

MEWS COURT – CARRIAGEWAY, FOOTWAY AND VEHICULAR CROSSOVER CONSTRUCTION

HIGHWAY DESIGN GUIDE STANDARD DETAILS

15/6/2012

MERTHYR TYDFIL
COUNTY BOROUGH COUNCIL



Drawn	JS
Checked	PW
Date	Mar '12
Scale	NTS
Drg. No.	11
Rev.	