
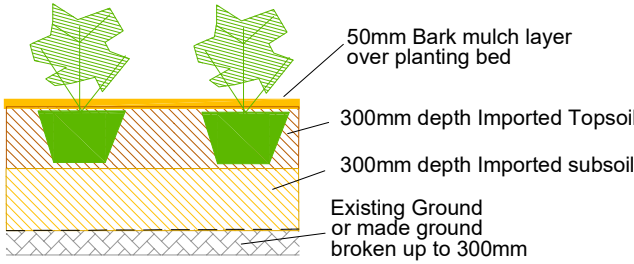



RAIN GARDEN
PLANTING NO TREES
RG BEDS 3 AND 4

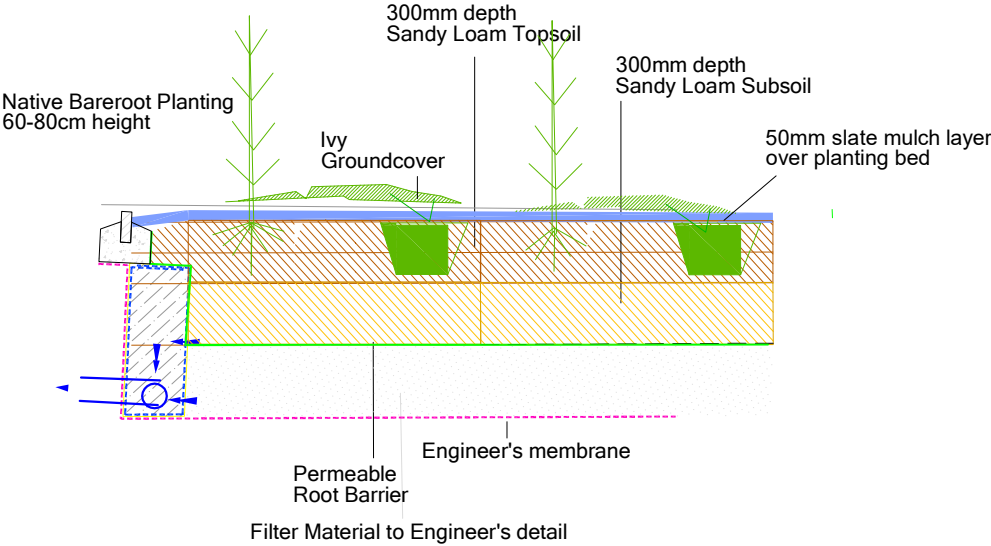

Shrubs container grown
root mass dipped in seaweed
extract.

PLANTING BEDS 9 AND 10

RAIN GARDEN WITH
TREES AND PLANTING
RG BEDS 1,2,5,6,7 AND 8

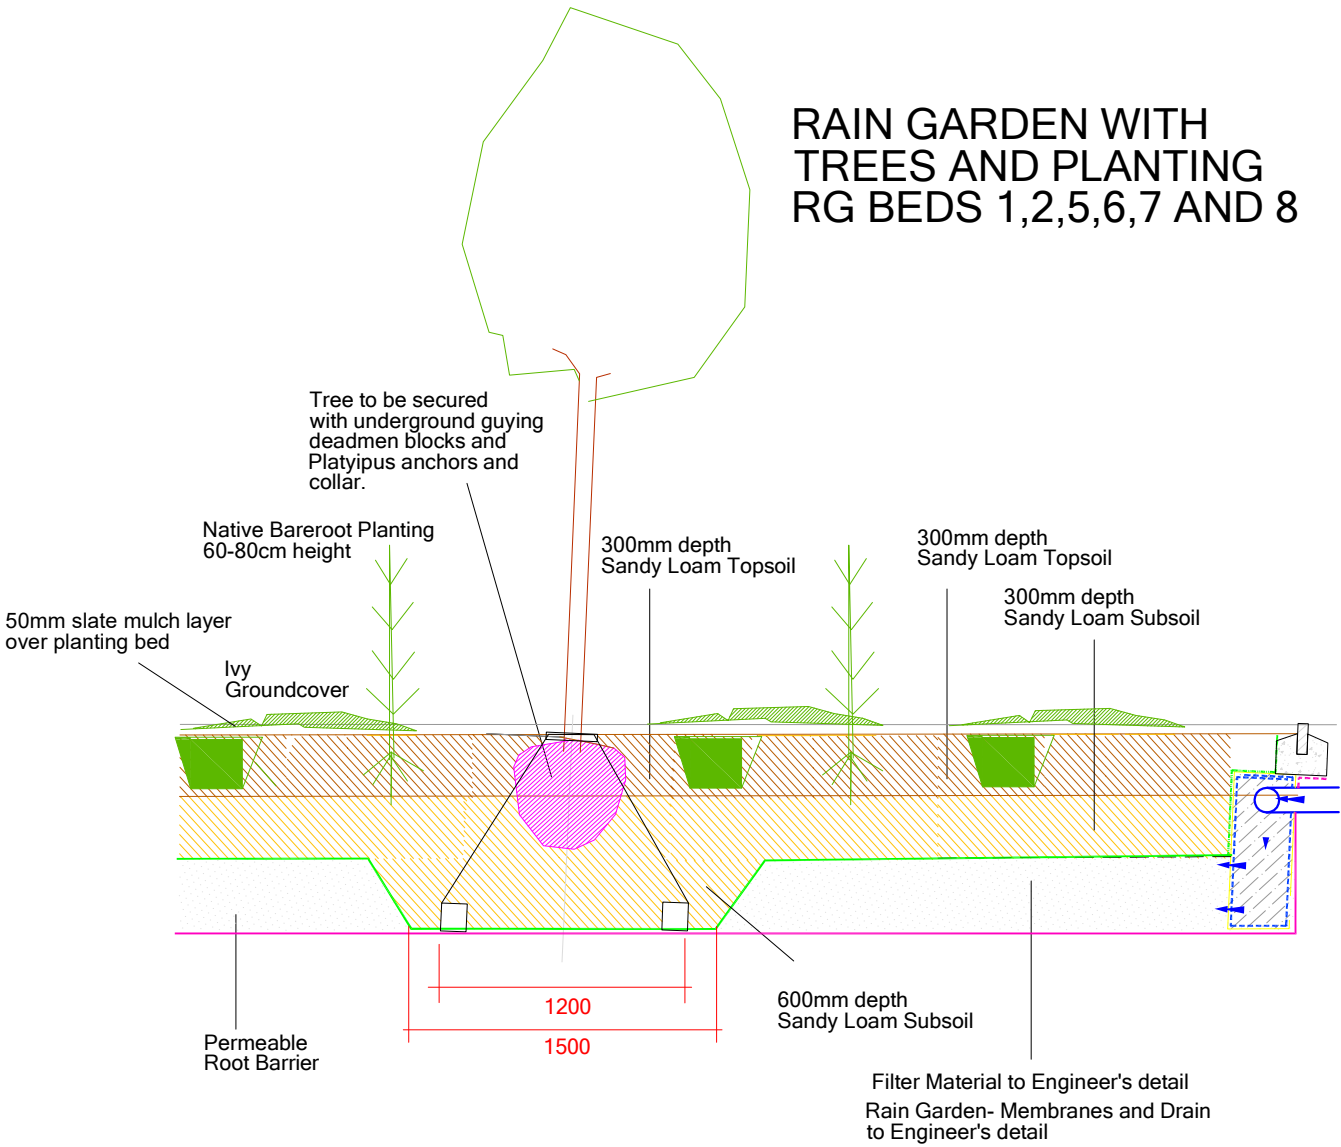


NOTE Depth of Rain Garden dependent on Engineer's requirements.
Soil requirement for planting is dependent on landscape type
Planting beds 300mm Sandy Loam Topsoil : 300mm Sandy Loam Subsoil
Trees 300mm Sandy Loam Topsoil : 600mm Sandy Loam Subsoil

A permeable rootbarrier is to be installed below the soil areas

Note All non-perishable wrappings to tree rootballs are to be removed prior to planting. Perishable wrappings eg hessian and narrow gauge non galvanised chicken wire basket are retained until the tree is in position. Then peel back and remove the perishable parts from the top third of the rootball.

Extra Heavy Standard have aeration, watering feeding tube.

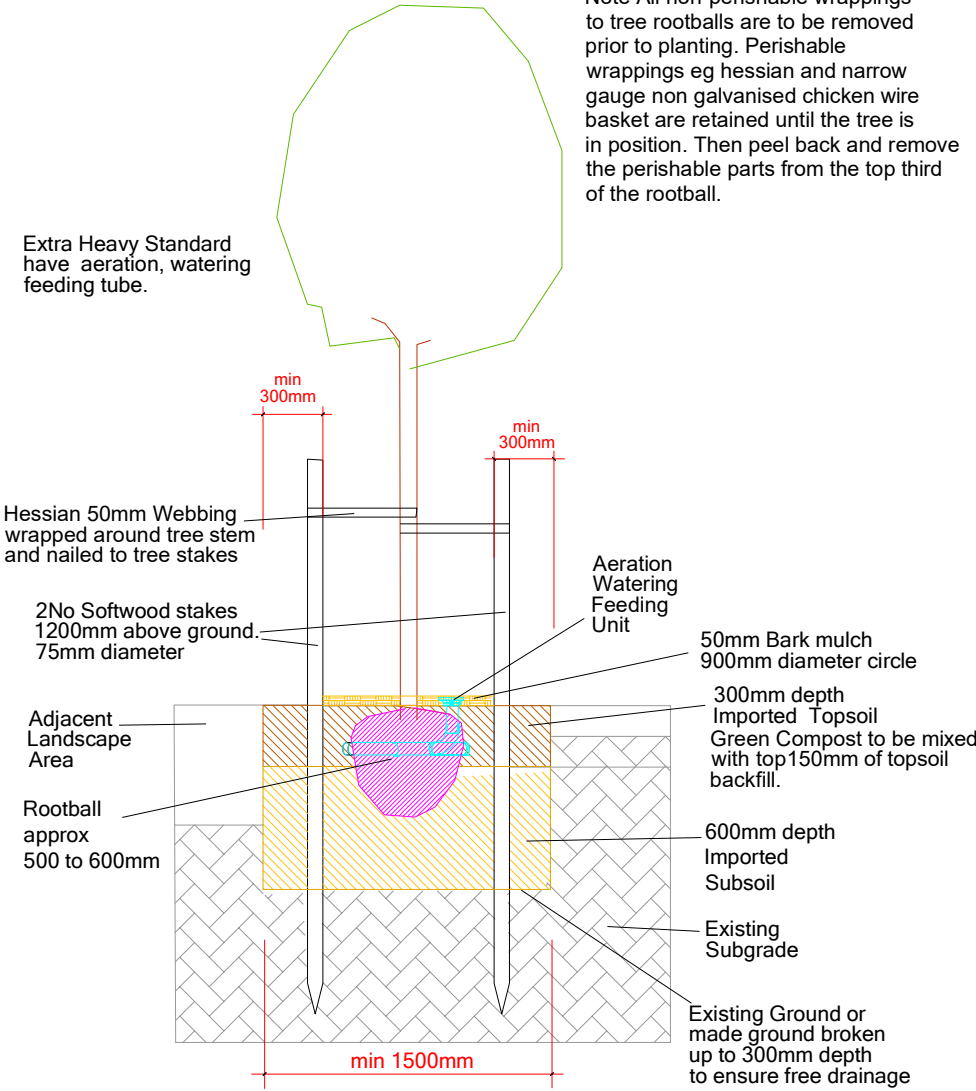

EXTRA HEAVY STANDARD IN BEDS 9 AND 10

CA 2020-45Rev B
25 Aug 2023
Revised Planting

CA 2020-45Rev A
21 July 2020
Revised Planting

Corscadden Associates
77 Fairleigh Road
Pontcanna, Cardiff. CF11 9JW
Tel 02920 373053
email ca@corscaddenassociates.com

MKR PROPERTY
PANT INDUSTRIAL
ESTATE.
MERTHYR TYDFIL

Drawing Title
TREE & PLANTING
BED SECTIONS

Scale as given Date 8 July 2020

291 Drawing No CA 2020-45 Rev B