

PROPOSED RESIDENTIAL DEVELOPMENT
AT
LAND SOUTH OF CANAL SIDE HOUSE
ABERFAN

EXTERNAL FINISHES TO DWELLINGS



Rivendale fibre cement slates



Sustainability	
Green guide rating	A* (Element ref: 812410008)
BES 6001	Very good – can achieve 3 credits
Credit uplift available with EPD	Carbon footprint of 13 CO ₂ e/m ²

Technical data*	
Size of slate	600mm x 300mm
Minimum pitch**	Moderate exposure 22.5° (100mm lap) 20° (110mm lap) Severe exposure 25° (100mm lap) 22.5° (110mm lap)
Maximum pitch	90°
Typical laps	100, 110mm
Maximum gauge	246-260mm
Slate thickness	4mm
Covering capacity (net)	13.4 slates/m ² at 100mm lap 13.6 slates/m ² at 110mm lap
Weight of slating (approx.)	20.4 kg/m ² (0.20 kN/m ²) at 100mm lap 20.9 kg/m ² (0.20 kN/m ²) at 110mm lap
Battens required (net)	4.00 lin.m/m ² at 100mm lap 4.08 lin.m/m ² at 110mm lap
Batten size recommended	38 x 25mm for rafters/supports not exceeding 450mm centres 60 x 25mm for rafters/supports not exceeding 600mm centres (load to BS 5534)
Fixings	Slate nails (50 x 2.66mm) Copper disc rivets (10mm dia. x 2mm stem)
Fixings screws	14 gauge self sealing
Authority	BS EN 492



Colour availability



* Made to order

Shapes availability



finely detailed surface and dressed edges that together reproduce the attractive appearance of natural slate.


- > [Prefix](#)
- > [CAD](#)
- > [NBS specs](#)
- > [Fixing guide](#)

For advice, literature and samples Tel 01233 772538 or visit marleyeternit.co.uk

Marley Eternit Rivendale Slate to roofs
Colour – Blue Black

Staffordshire Blue
Black facing brick to
chimneys and quoins

Colour – Slate Blue
Smooth

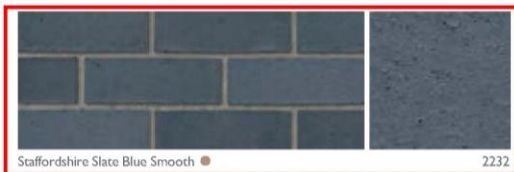

Staffordshire Slate Blue Smooth ●

2232



Brunel Smooth Blue Solid

5051



Staffordshire Blue Brindled Dragface

2221

ibstock's free sample service
 IBSTOCK BRICKS INDUSTRYLEADING SAMPLE SERVICE IS AVAILABLE FOR ALL PRODUCTS

ORDER 24 HOURS A DAY
 -24-

Order online at www.ibstock.com or call 0844 800 4578




Atlas Smooth Blue



2249



Broadway Grey Paving slabs
around dwellings, 600 x 600mm

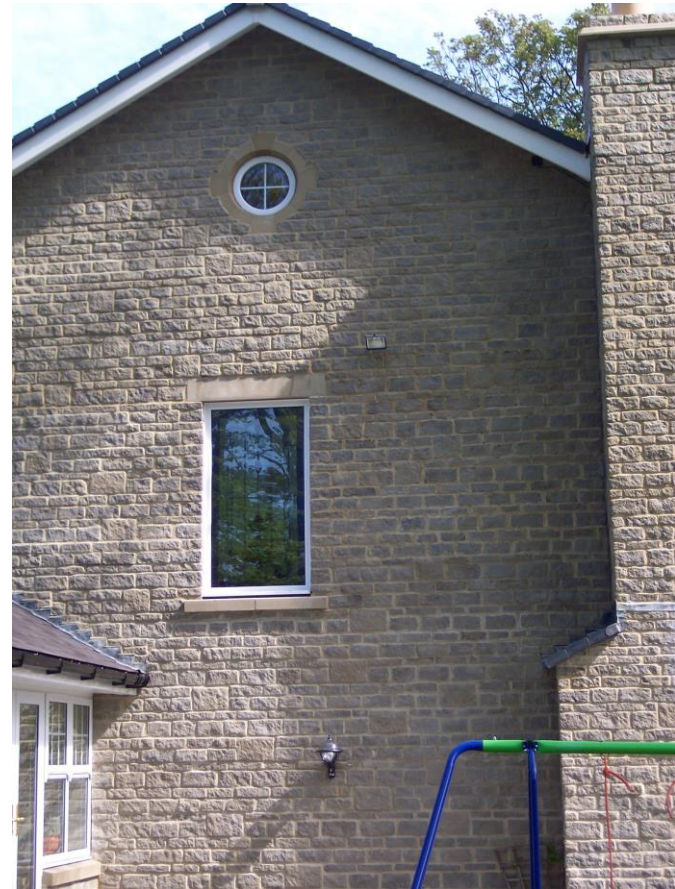


EXTERNAL STONWORK
TO BE KEINTON ROUGH
DRESSED WALLING
STONE WITH NATURAL
SAND CEMENT MORTAR.



Gutters and downpipes

Fascia

Hollow clad soffit

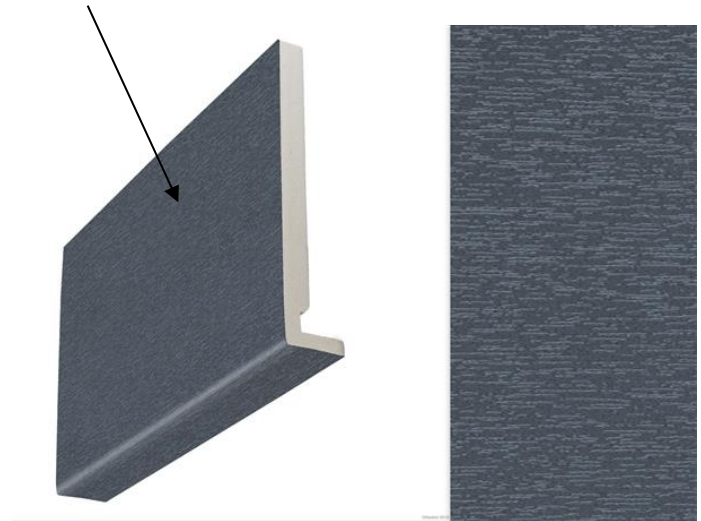



Composite front door



French doors

Windows



EXAMPLES OF GREY
UPVC EXTERNAL JOINERY

