



Back fill directly behind wall to be clean stone. Provide an impervious layer between stone and suitable material. Concrete to foundation to be C40 grade. Use two layers of A393 mesh in the foundation

PROPOSED RETAINING WALL:
AT:
FRONDEG, GWAUNFARREN,
MERTHYR TYDFIL March 2020

200224

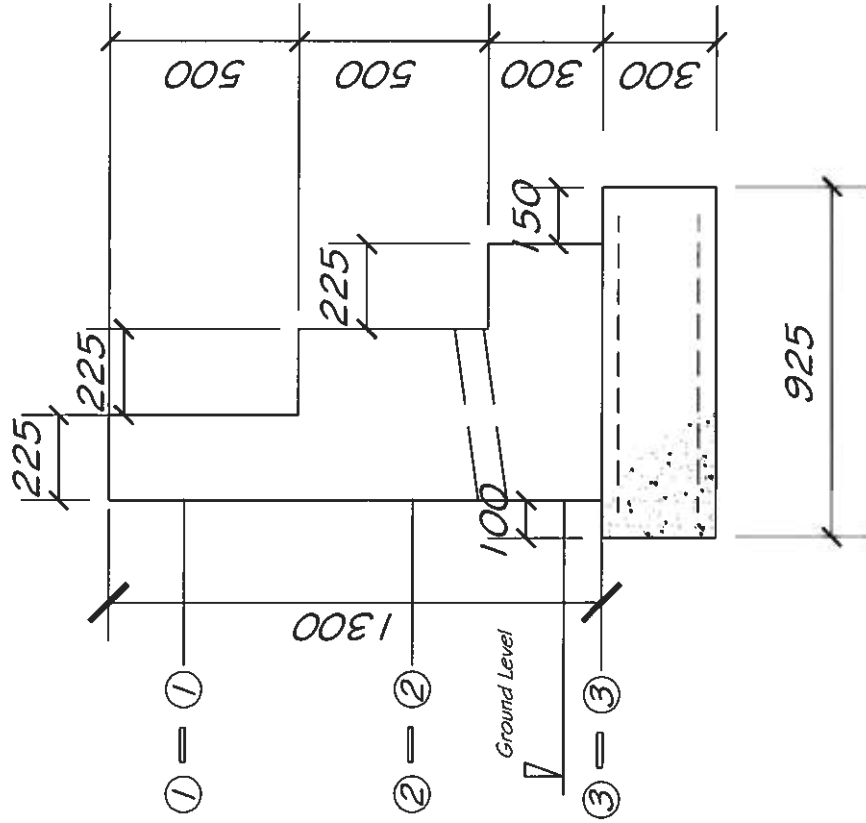

WALL SECTION 1:20

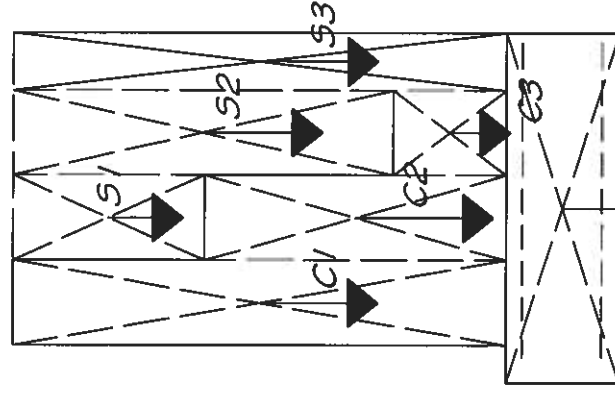

FORCE DIAGRAM 1:20

75mm diameter weep-holes spaced at 1.5m centres.

Backfill directly behind new wall to be clean stone with an impervious fabric between the stone and additional suitable backfill.

