



Kingfisher

SPORT

Part of the LUCECO group of companies

Datasheet

Amnis Match



Specification Text

The luminaire shall be manufactured from high pressure die-cast aluminium. It shall have an LED efficacy of up to 141 luminaire lm/W and will be capable of producing up to 94,000 luminaire lumens at 4000K with a CRI >70. It shall have an asymmetric forward throw optic and is rated at IP66 and IK08.

Specification

Weight:

Fitting:	16.0 kg
Driver:	8.0 kg
Fitting with integral driver:	16.7 kg

Windage: 0.19m²

Material: Die-cast Aluminium


Paint Finish: Marine Grade
Powder Coated
Anthracite Grey

Key Features


- 450W - 665W
- 59,000 - 94,000 Luminaire Lumens
- Efficacy up to 141lm/W
- 2700K, 4000K
- CRI >70, CRI >80, CRI >90
- Lifetime >100,000hr
- Asymmetrical
- Driver options
- Marine grade paint



Optics

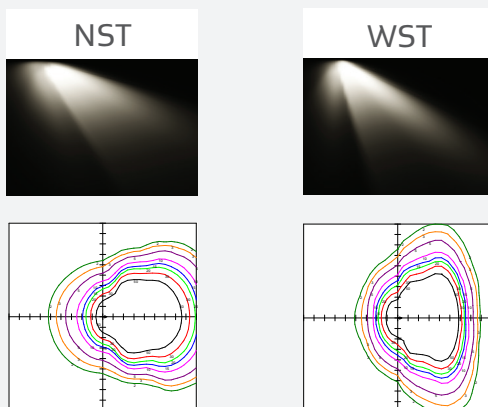

Dimensions

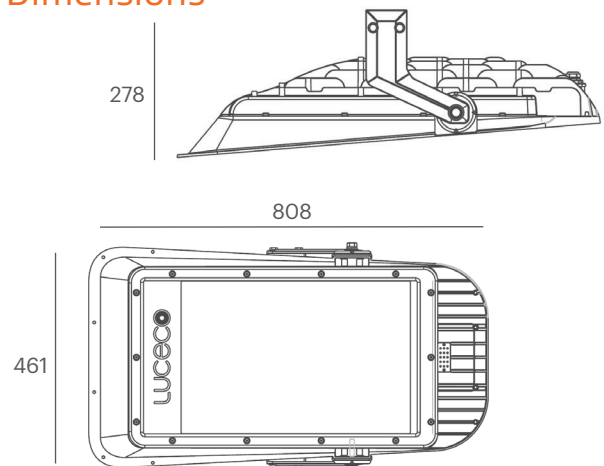

All measurements in mm

Code	Power	Luminaire Lumens	Optic	CCT(K)	IP	IK	Weight (kg)		Paint Finish
Seperate driver							Fitting	Driver	
LAFM94NRS6WST740	665W	94000	Wide Short Throw	4000	IP66	IK08	16.0	8.0	Anthracite Grey
LAFM87NRS6NST740	665W	87000	Narrow Short Throw	4000	IP66	IK08	16.0	8.0	Anthracite Grey
Integral driver									
LAFM64ID4WST740	450W	63500	Wide Short Throw	4000	IP66	IK08	16.7	-	Anthracite Grey
LAFM59ID4NST740	450W	59000	Narrow Short Throw	4000	IP66	IK08	16.7	-	Anthracite Grey



Accessories / Options

- External & integral spill shields
- Control options
- Dimmable options
- Colour Temperature options

Mounting Options

- Bracket mounted

