

Lipumax- P-D

Product information for the product group



ACO Product benefits


- For gully top designs for load class D 400, shaft has buoyancy safety up to the upper side of the shaft manhole cover without need for on-site concrete castings.
- Proven stability: 50 years

- Grease separator plant as per DIN EN 1825 and DIN 4040-100
- For underground installation
- Cleaning via shaft manhole cover
- Emptying via suction line DN 65 PN 10
- With PE couplings for two-sided thread connection 75/75 mm for suction line
- With fire hose quick coupling 75 B and 2½" blank cap
- Counter flange with fire hose quick coupling 75 B and 2½" blank cap
- System ACO Passavant
 - Building Supervisory Authority approval Z-54.1-509
- Suitable top sections
 - Top sections

Item Technical Data 3210.81.00

Nominal capacity	Inlet/ Outlet	Contents			Weight
		Sludge trap [l]	Grease store [l]	Overall [l]	
NS 10	DN 150	1005	415	2170	128

Dimensions

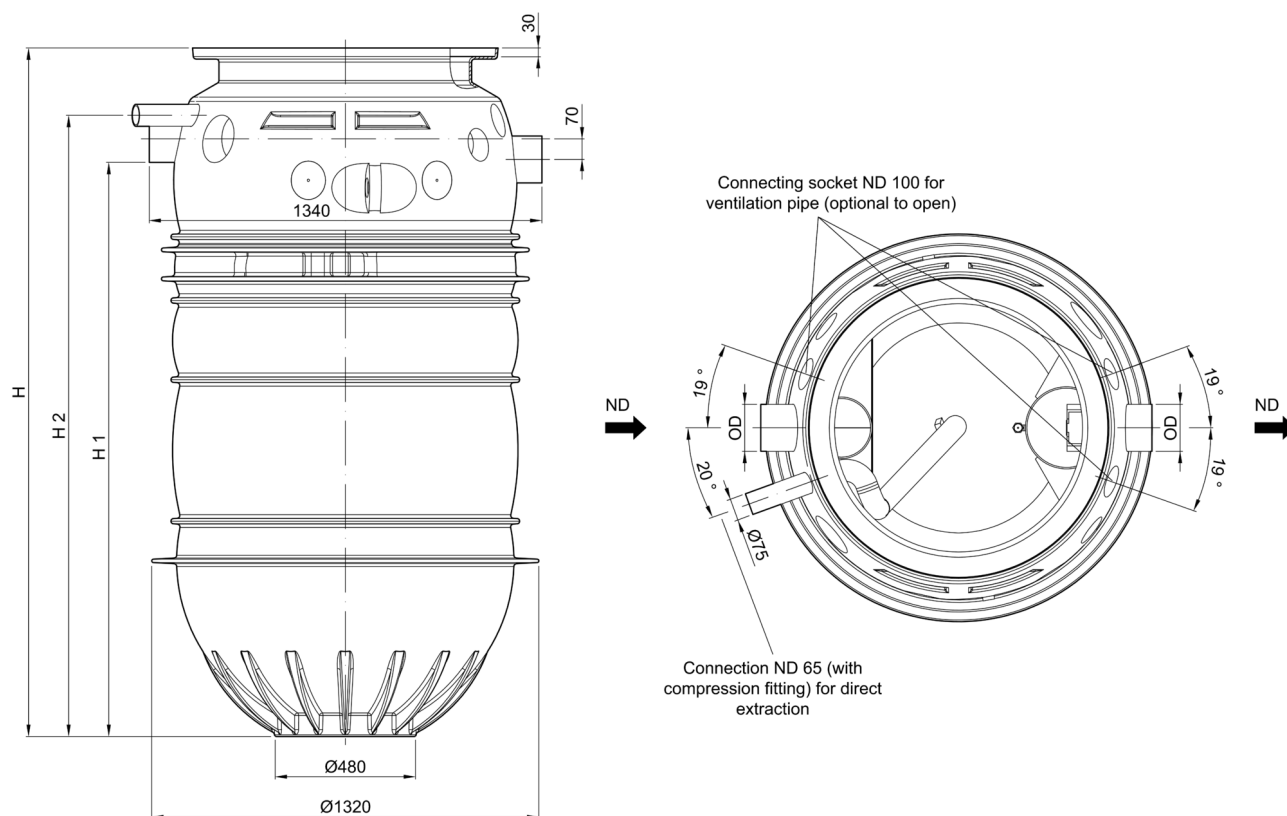

Nominal capacity	Sludge trap	Dimensions			
		D	H	H1	H2
	[l]	[mm]	[mm]	[mm]	[mm]
NS 10	1005	160	2828	2438	2599

Accessories

	Description	Used with	Description	Item number
	Extension 450	Sampling shaft	- Made from plastic, material polyethylene - For fitting on upstream shaft for deep installations - Structure height: 100 – 650 mm (can be reduced to 45 mm by cutting off at cutting marks) - Max. two extension can be used - Weight: 8.8 kg	3300.13.00

	Description	Used with	Description	Item number
	Grease layer thickness measuring device	■ Grease separator LipuMax-P for underground installation ■ Stach separator FapuMax-P for underground installation	■ For electronic measurement of layer of grease ■ Suitable for liquid and/or congealing grease ■ Measuring device with plug and used connecting cable, length: 3 m ■ With two voltage-free changeover contacts to display full warning (100 %) and advance warning of fill level (80 %) ■ With visual display of fill level for advance warning and full warning ■ With heated probe rod to increase reliability of operation ■ Operating voltage: 230 V/50 Hz ■ Max consumption approx. 12 W	
			Cable length: 10 mWeight: 6.4 kg	3300.11.70
			Cable length: 20 mWeight: 7.8 kg	3300.11.71
			Cable length: 30 mWeight: 9.6 kg	3300.11.72
	Storage	■ Grease separator LipuMax-P for underground installation ■ Stach separator FapuMax-P for underground installation	■ Made from concrete ■ Diameter: 625 mm ■ Thickness: 60 mm ■ Without seal ■ Displacement-proof ■ Height □ 60 mm excluding mortar joints □ 70 mm including mortar joints ■ Weight: 50 kg	8700.20.00
	Storage	■ Grease separator LipuMax-P for underground installation ■ Stach separator FapuMax-P for underground installation	■ Made from concrete ■ Diameter: 625 mm ■ Thickness: 80 mm ■ Without seal ■ Displacement-proof ■ Height □ 80 mm excluding mortar joints □ 90 mm including mortar joints ■ Weight: 60 kg	8700.20.10
	Storage	■ Grease separator LipuMax-P for underground installation ■ Stach separator FapuMax-P for underground installation	■ Made from concrete ■ Diameter: 625 mm ■ Thickness: 100 mm ■ Without seal ■ Displacement-proof ■ Height □ 100 mm excluding mortar joints □ 110 mm including mortar joints ■ Weight: 70 kg	8700.20.20

You can find further accessories under → /32108100