



ACO Grease Separator LipuMax-P-D

Sectional view

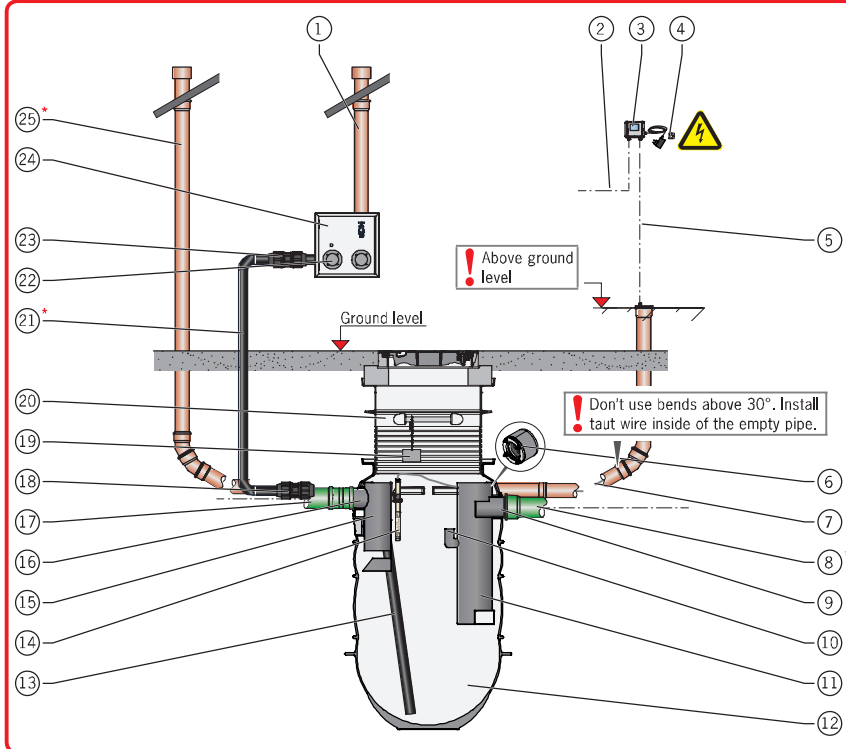

Top view

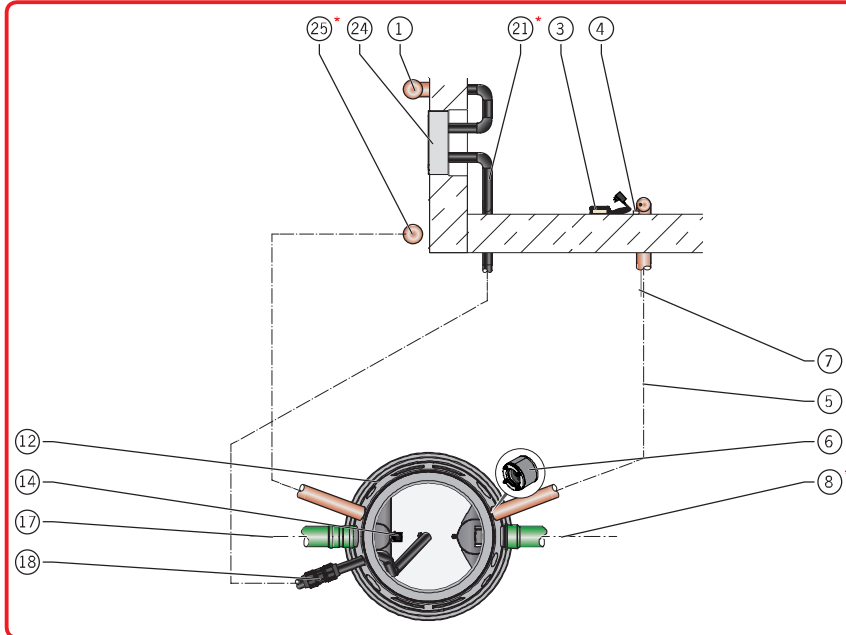

* Alternative variations of ventilation-, outlet- and disposal piping, addition to installation proposal.




For reason of a safety and proper application, please read carefully the instruction manual of the grease separator LipuMax-P-D and further product documentation and store them until the product disposal. Make sure, that these documents are handed out to the end user.

Caption


Pos.	Component	Scope of delivery LipuMax-P-D	Optional by ACO	On-site
1	Pump truck ventilation pipe DN100 (optional)			X
2	Electrical connection for forwarding procedural message malfunction			X
3	Grease level sensor with 3m connection cable and power supply		X	
4	Shockproof sockets 230V/50Hz			X
5	Supply pipe DN100			X
6	Cable duct		X	
7	Connection cable (10m, 20m or 30m) grease level sensor		X	
8 *	Outlet pipe			X
9	Nozzle for on site drainpipe	X		
10	Sampling device connection	X		
11	Outlet baffle	X		
12	Tank	X		
13	Disposal pipe	X		
14	Grease level sensor		X	
15	Inlet baffle	X		
16	Inlet	X		
17	Inlet pipe			X
18	Compression fitting	X		
19	Type plate	X		
20	Raising system for load class A15, B125 or D400		X	
21 *	Disposal pipe (min. DN65)			X
22	Connection for disposal DN65 (connection coupling with blind cover)	X		
23	Compression fitting	X		
24	Connection box		X	
25 *	Ventilation pipe DN100			X

ACO Grease Separator LipuMax-P-DA

Sectional view

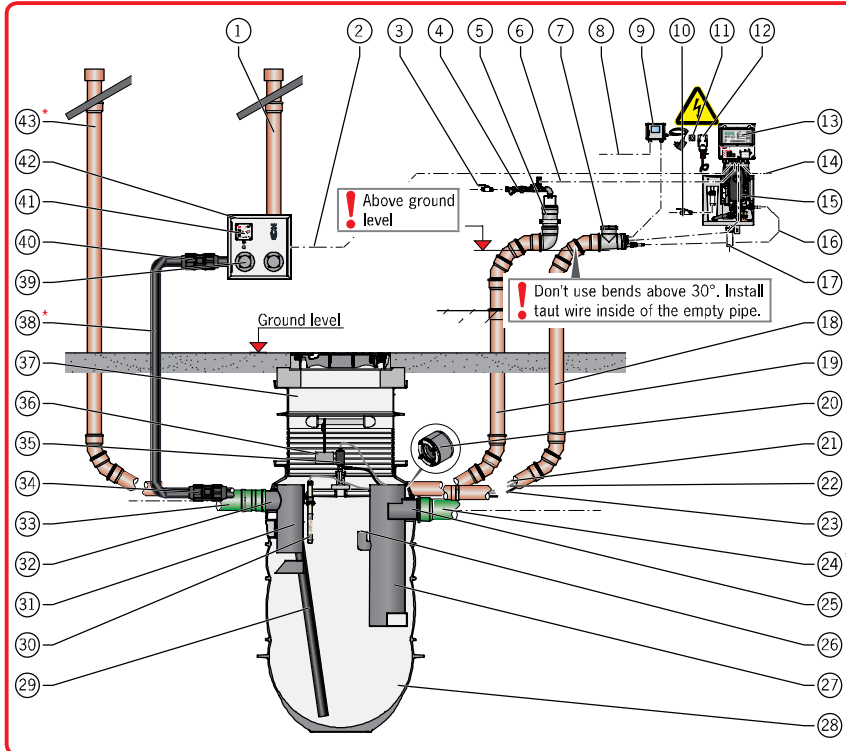

Top view

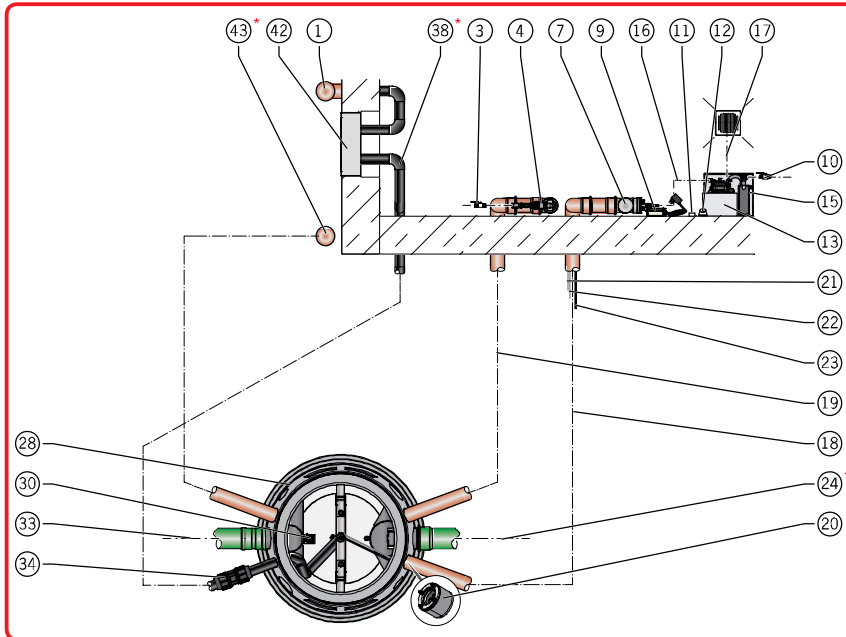

* Alternative variations of ventilation-, outlet- and disposal piping, addition to installation proposal.



For reason of a safety and proper application, please read carefully the instruction manual of the grease separator LipuMax-P-DA and further product documentation and store them until the product disposal. Make sure, that these documents are handed out to the end user.

Caption

Pos.	Component	Scope of delivery LipuMax-P-DA	Optional by ACO	On-site
1	Pump truck ventilation pipe DN100 (optional)			X
2	Connection cable remote control			X
3	Cold water pipe 3/4" filling unit			X
4	Filling unit with solenoid valve	X		
5	Pipe parts DN 100 filling pipe with odour trap	X		
6	Connection cable solenoid valve	X		
7	Pipe parts DN 100 supply pipe	X		
8	Electrical connection for forwarding procedural message malfunction			X
9	Grease level sensor with 3m connection cable and power supply		X	
10	Cold/warm water pipe 3/4" HP unit			X
11	Shockproof sockets 230V/50Hz			X
12	CEE socket 16A/400V/50Hz			X
13	Control unit grease separator with 1,5m connection cable and CEE socket	X		
14	Connection cable for forwarding malfunction (optional)			X
15	High pressure unit (HP-unit) cleaning tank	X		
16	High pressure hose (2,7m)	X		
17	Drainpipe DN50 HP-unit			X
18	Supply pipe DN100			X
19	Filling pipe DN100			X
20	Cable duct	X		
21	Connection cable (10m, 20m or 30m) grease level sensor		X	
22	Connection cable (30m) HP head	X		
23	High pressure hose (10m, 20m or 30m)		X	
24 *	Outlet pipe			X
25	Nozzle for on site drainpipe	X		
26	Sampling device connection	X		
27	Outlet baffle	X		
28	Tank	X		
29	Disposal pipe	X		
30	Grease level sensor		X	
31	Inlet baffle	X		
32	Inlet	X		
33	Inlet pipe			X
34	Compression fitting	X		
35	Electrical HP cleaning head	X		
36	Type plate	X		
37	Raising system for load class A15, B125 or D400		X	
38 *	Disposal pipe (min. DN65)			X
39	Connection for disposal DN65 (connection coupling with blind cover)	X		
40	Compression fitting	X		
41	Remote control	X		
42	Connection box		X	
43 *	Ventilation pipe DN100			X