

Double Gate Specifications

80x80 gate frame
100x150 RHS bottom beam
50x50 SHS cross bars
100x100 shs bolt down support frames
RC Magnum carriage
868 mesh infill

Automation

Compliant to BS/EN 12453
NICE Run 2500 motor
3no safety edges/ ASO 65mm
2no set of safety photocells
Electrical Enclosure box

Access control by others
230V 16A power supply by others

Quantity 1no. Required

Finish HD Galv And PPC

Colour 9005 Satin Black


Project Number 2360

Page size: A3	Material Mild steel	Units MM
----------------------	----------------------------	-----------------

Description:
Site Layout
Automatic Cantilever Sliding Gate

Drawing number: 2360A	Revision 2
------------------------------	-------------------

Front elevation Gate opening direction from outside

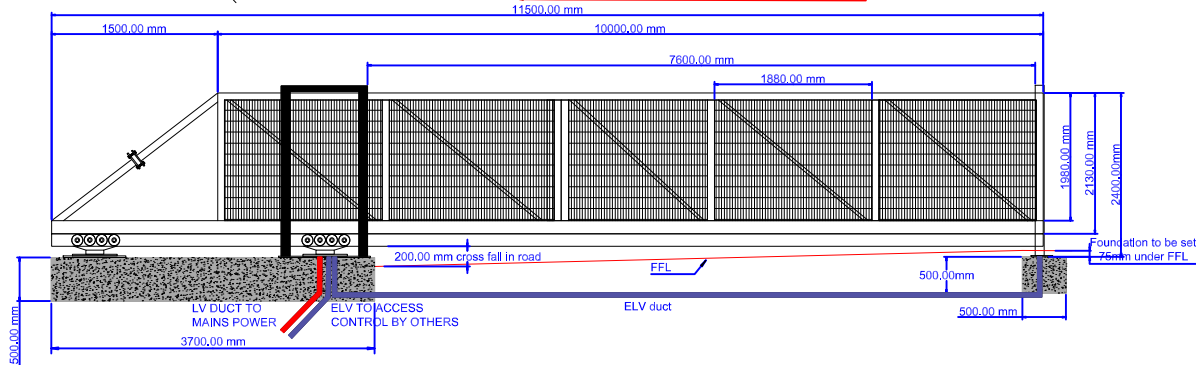

Plan view

