



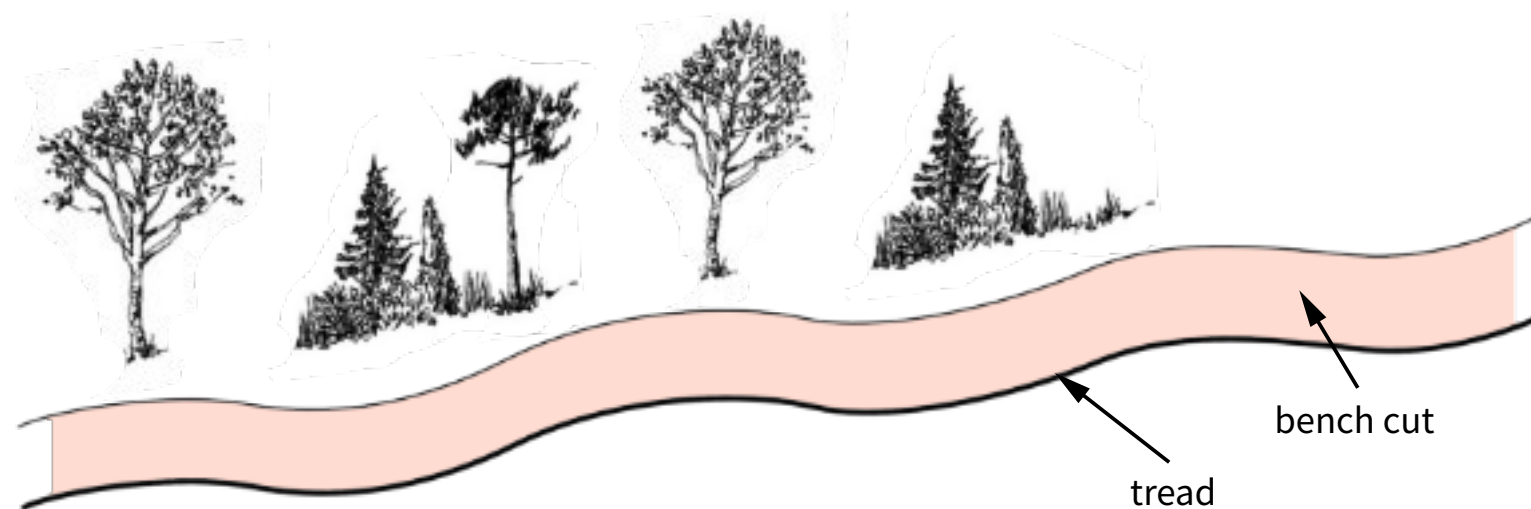

grade reversals need to go up and down as they traverse along the hillside, as well as in and out

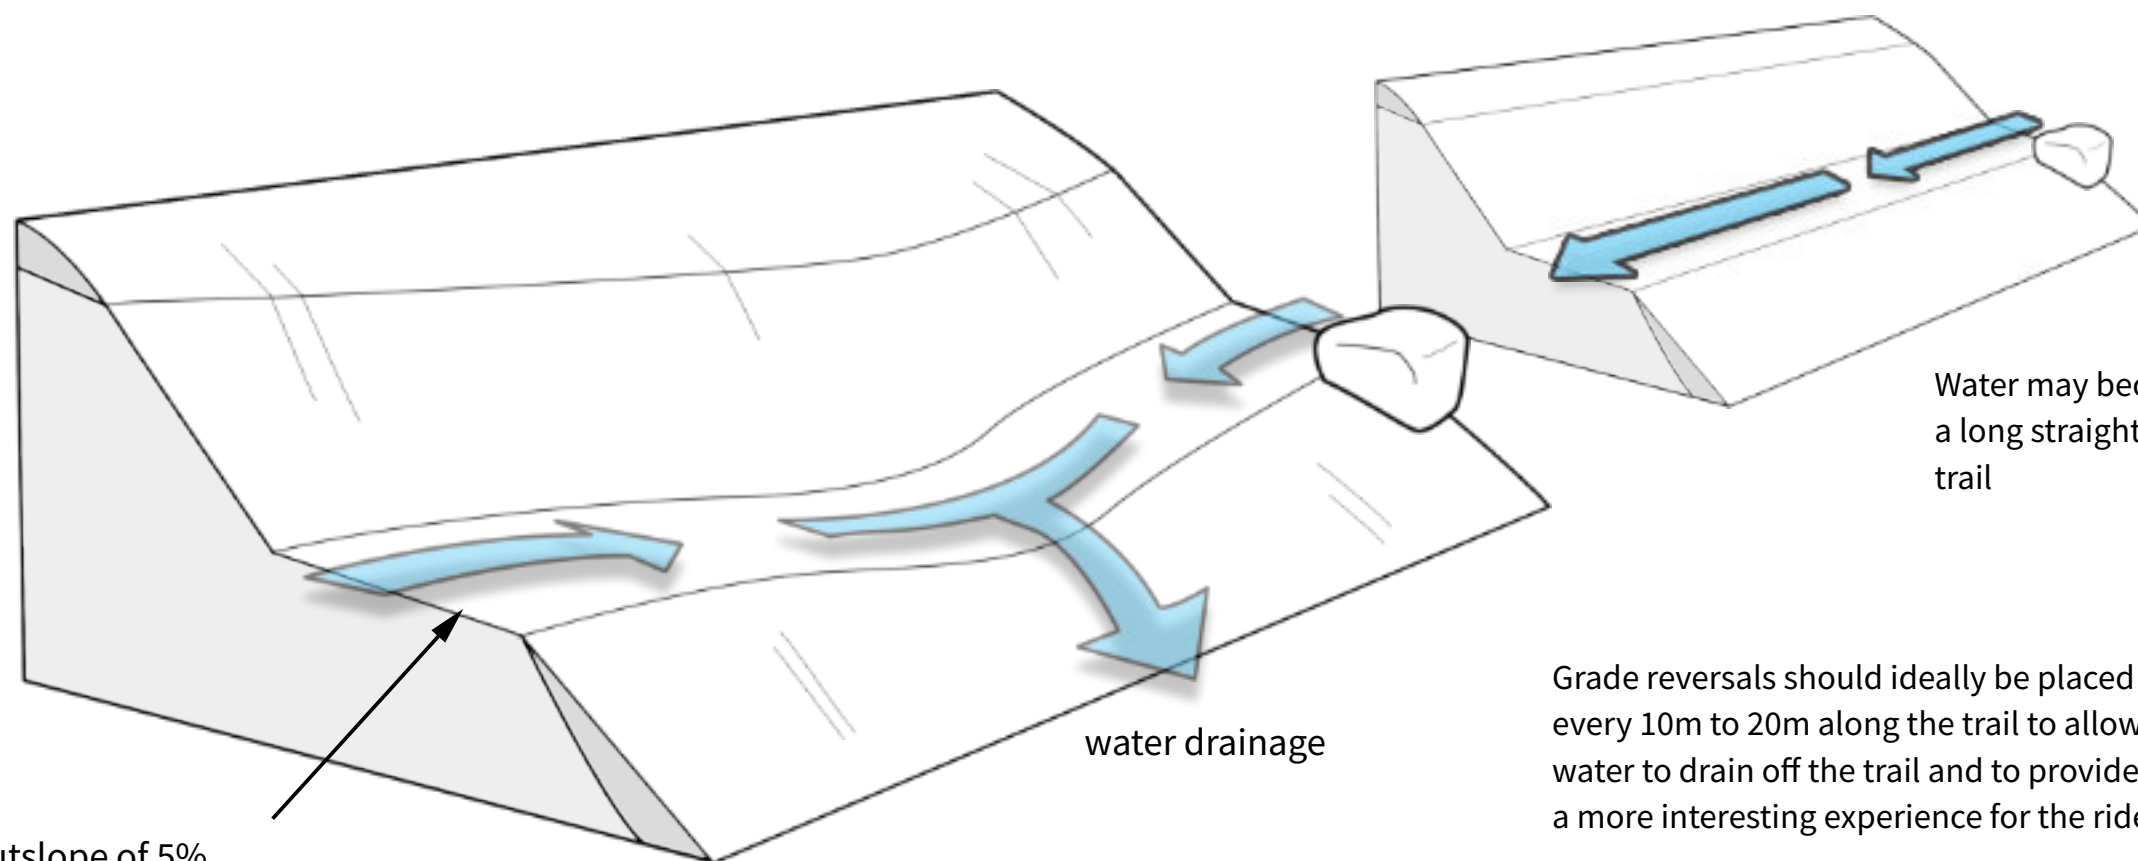

Grade reversals should ideally be placed every 10m to 20m along the trail to allow water to drain off the trail and to provide a more interesting experience for the rider

Comments:

Client:



Project:

FUTURE MASTERPLAN

Scale & Paper Size: NTS

Revision: Date: 19.10.22

Drawing Title:

GRADE REVERSAL

Drawing No:

OT-BPW22-TF06

ON' TRACK.

© Copyright. Back On Track Mountain Bike Solutions Ltd,
PO Box 106, Pontypool, NP4 4BZ
Tel: 01495 785428 info@ontrack.cc