



Back fill directly behind wall to be clean stone. Provide an impervious layer between stone and suitable material. Concrete to foundation to be C40 grade. Use two layers of A393 mesh in the foundation

PROPOSED RETAINING WALL:
AT:
1, ASH VILLAS,
TROEDYRHIW,
MERTHYR TYDFIL
May 2022

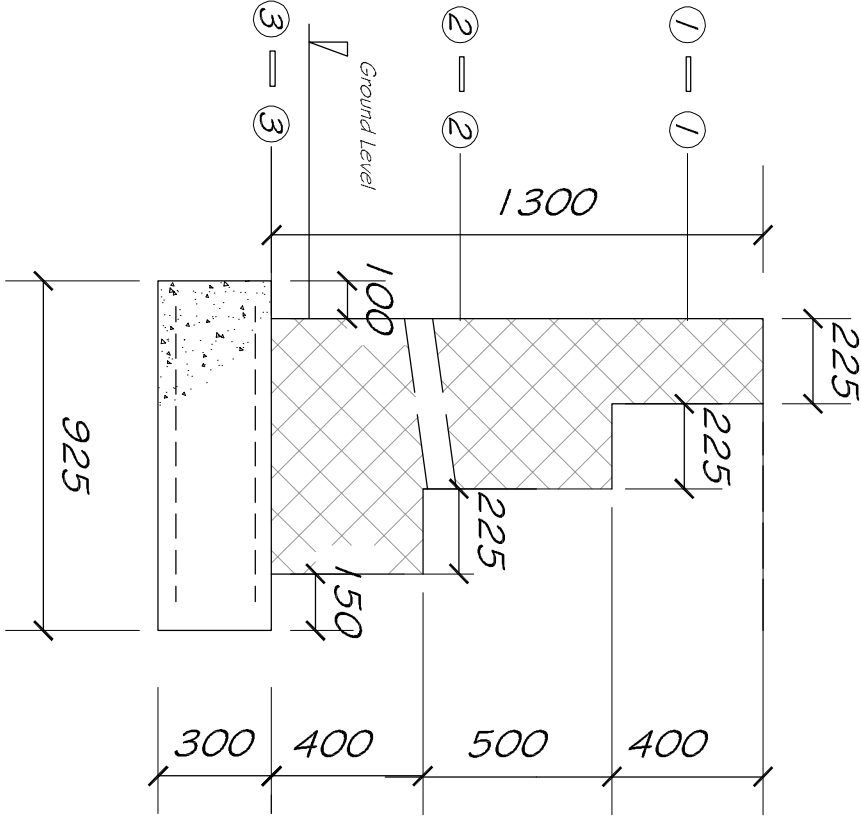

75mm diameter
weep-holes spaced at
1.5m centres.

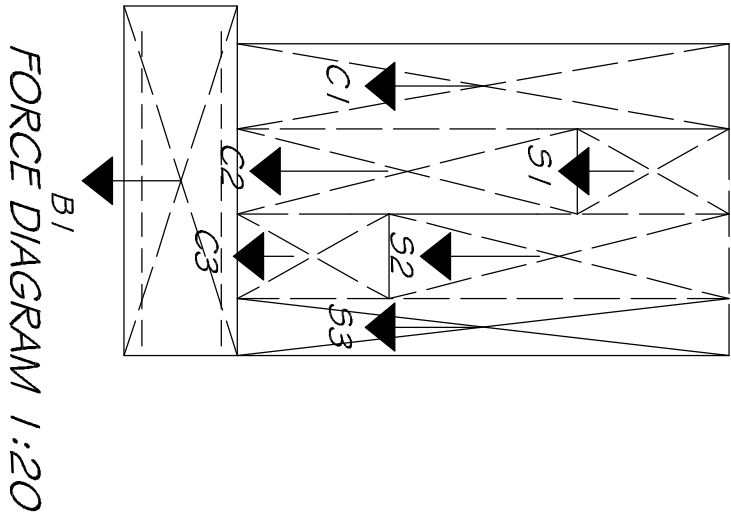

Backfill directly behind new wall to be clean stone with an impervious fabric between the stone and additional suitable backfill.