

Penydarren Boys and Girls FC

FOOTBALL LED - 300lux

Date: 08-04-2021

Designer: Andy Poplett

Description: Pitch 100m x 64m

The design has been completed using the Philips Asymmetric OptiVision LED GEN 3.5 Floodlights. A total of 16no have been used to achieve an average of 200lux.

Floodlights are mounted on 6 x 15 metre columns

The nominal values shown in this report are the result of precision calculations, based upon precisely positioned luminaires in a fixed relationship to each other and to the area under examination. In practice the values may vary due to tolerances on luminaires, luminaire positioning, reflection properties and electrical supply.

Signify


Philips Centre
Guildford Business Park
Guildford
Surrey
GU2 8XG
Mobile Phone: 0044 7810 832266
E-Mail: andrew.poplett@signify.com

Table of Contents

1.	Project Description	3
1.1	Top Project Overview	3
2.	Summary	4
2.1	Project Luminaires	4
2.2	Calculation Results	4
3.	Calculation Results	5
3.1	Football: Graphical Table	5
3.2	Spillage: Graphical Table	6
3.3	Spillage: Iso Contour	7
3.4	Spillage: Filled Iso Contour	8
4.	Luminaire Details	9
4.1	Project Luminaires	9

1. Project Description

1.1 Top Project Overview

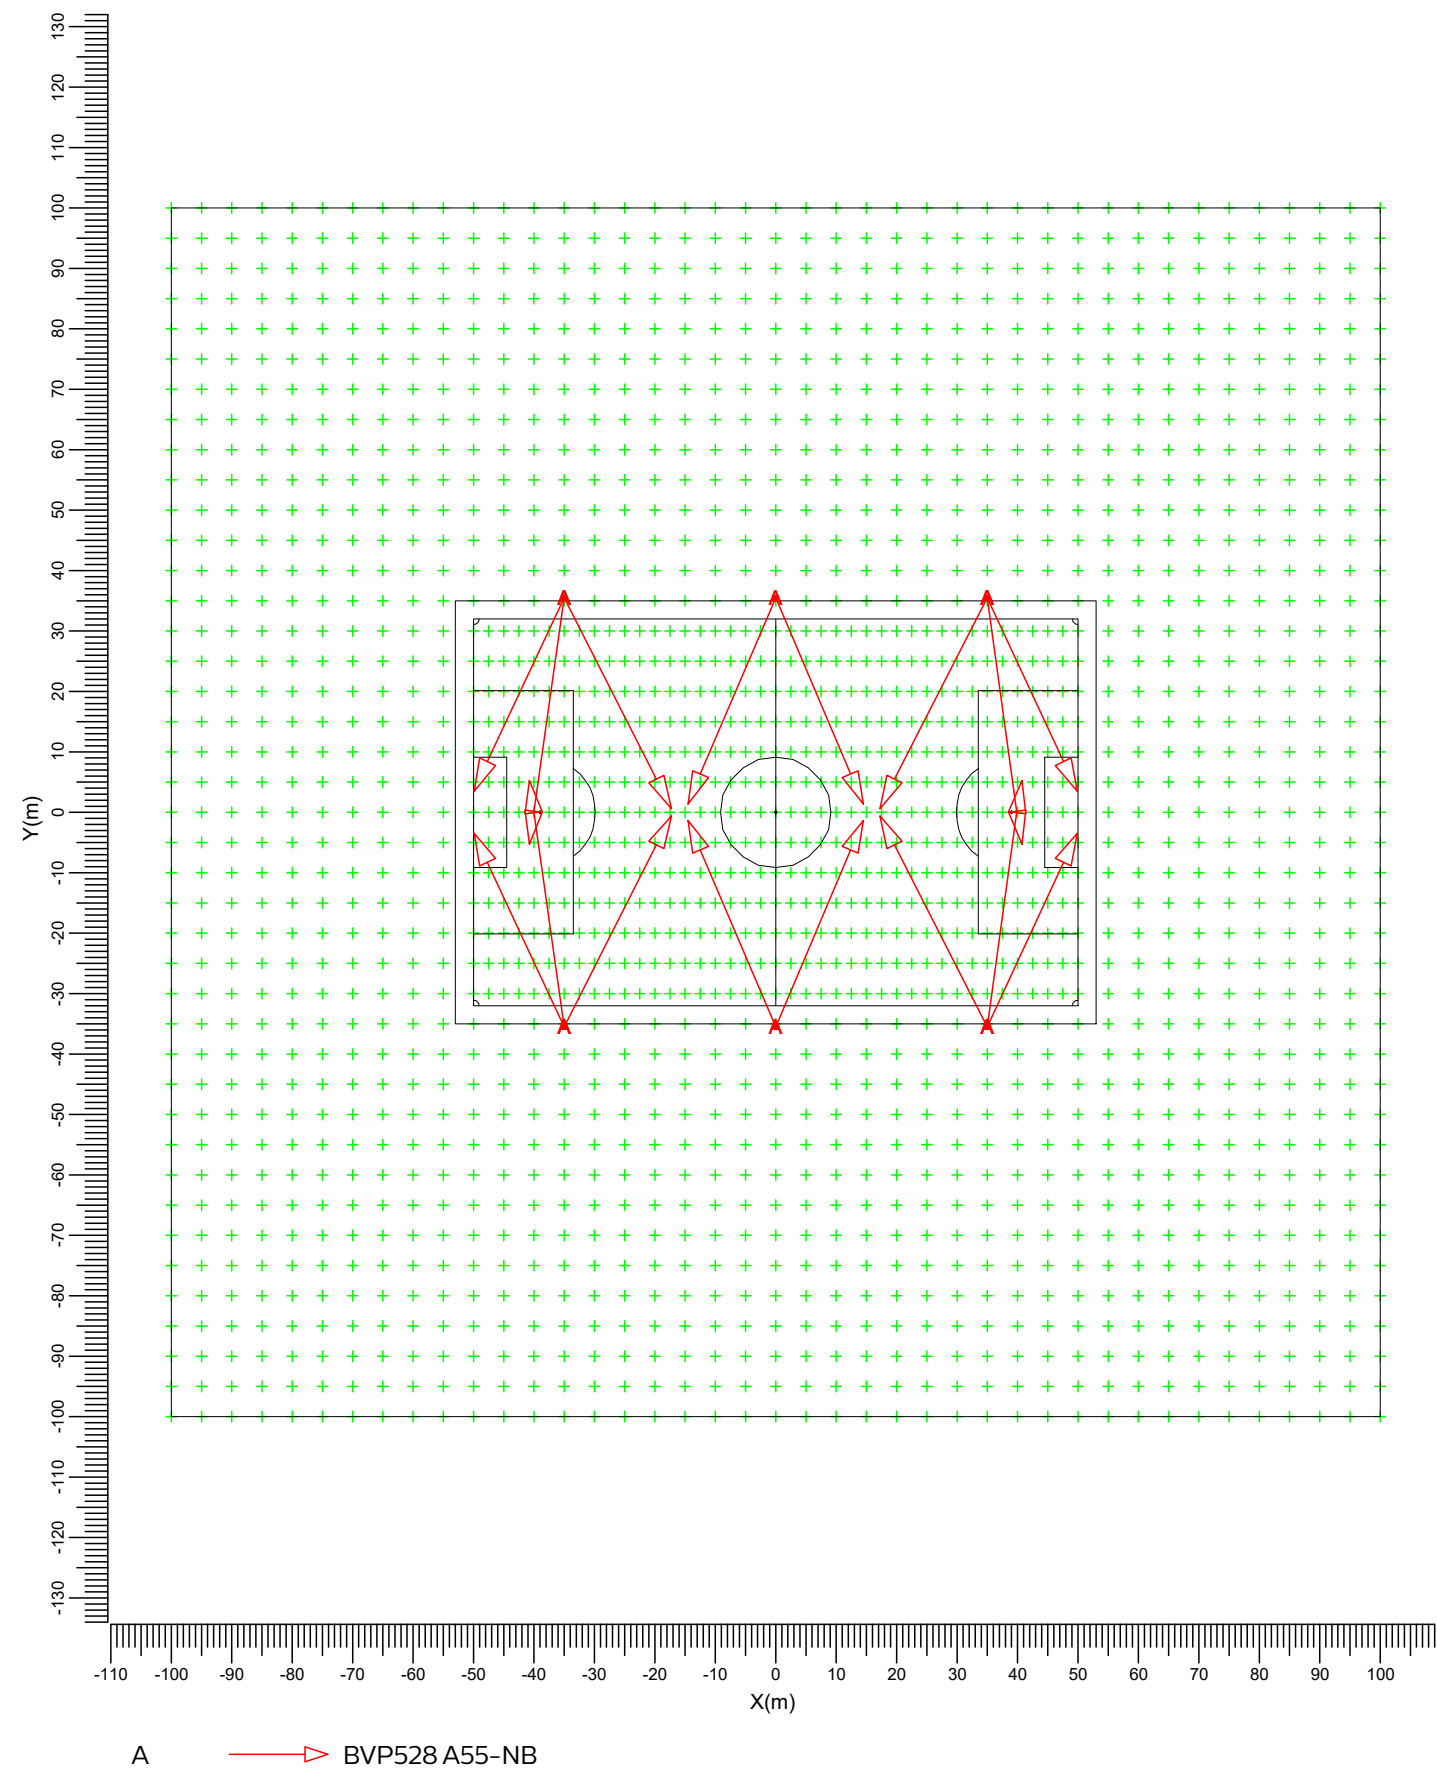

Scale
1:1250

2. Summary

2.1 Project Luminaires

Code	Qty	Luminaire Type	Lamp Type	Power (W)	Flux (lm)
A	16	BVP528 A55-NB	1 * LED2220/757 OUT T15 50K	1500.0	1 * 222600

The total installed power: 24.00 (kWatt)

Number of Luminaires Per Arrangement:

Arrangement	Luminaire Code	Power (kWatt)
	A	
Point	4	6.00
Point1	12	18.00

2.2 Calculation Results

(Il)luminance Calculations:

Calculation	Type	Unit	Ave Min/AveMin/Max		
Football	Surface Illuminance	lux	304	0.72	0.45
Spillage	Surface Illuminance	lux	63.5	0.00	0.00


Obtrusive Light Calculations:

The upward light ratio (ULR) is 0.00.

3. Calculation Results

3.1 Football: Graphical Table

Grid : Football at Z = -0.00 m
Calculation : Surface Illuminance (lux)

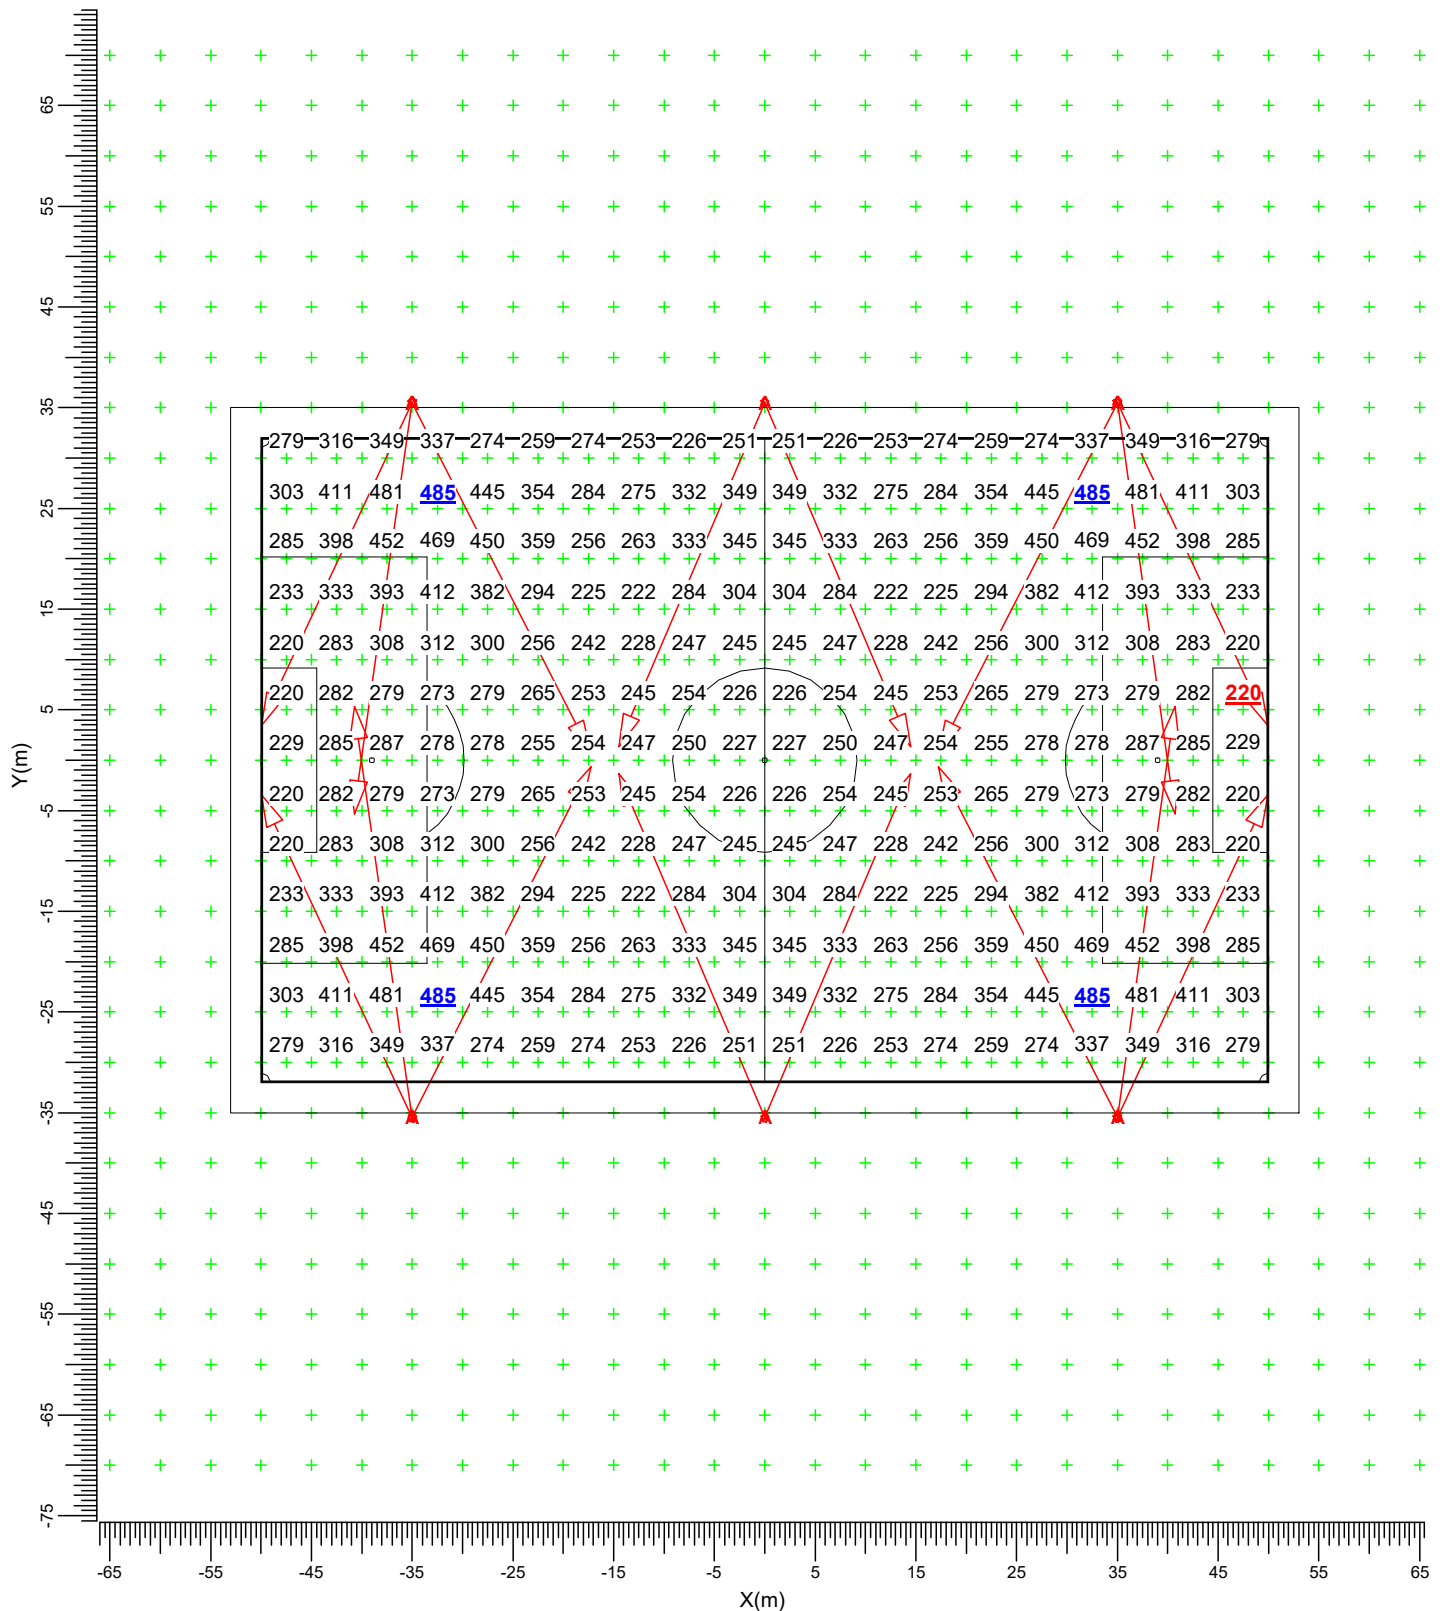

A BVP528 A55-NB

Average
304

Min/Ave
0.72


Min/Max
0.45

Project maintenance factor
0.90

Scale
1:750

3.2 Spillage: Graphical Table

Grid : Spillage at Z = -0.00 m
Calculation : Surface Illuminance (lux)

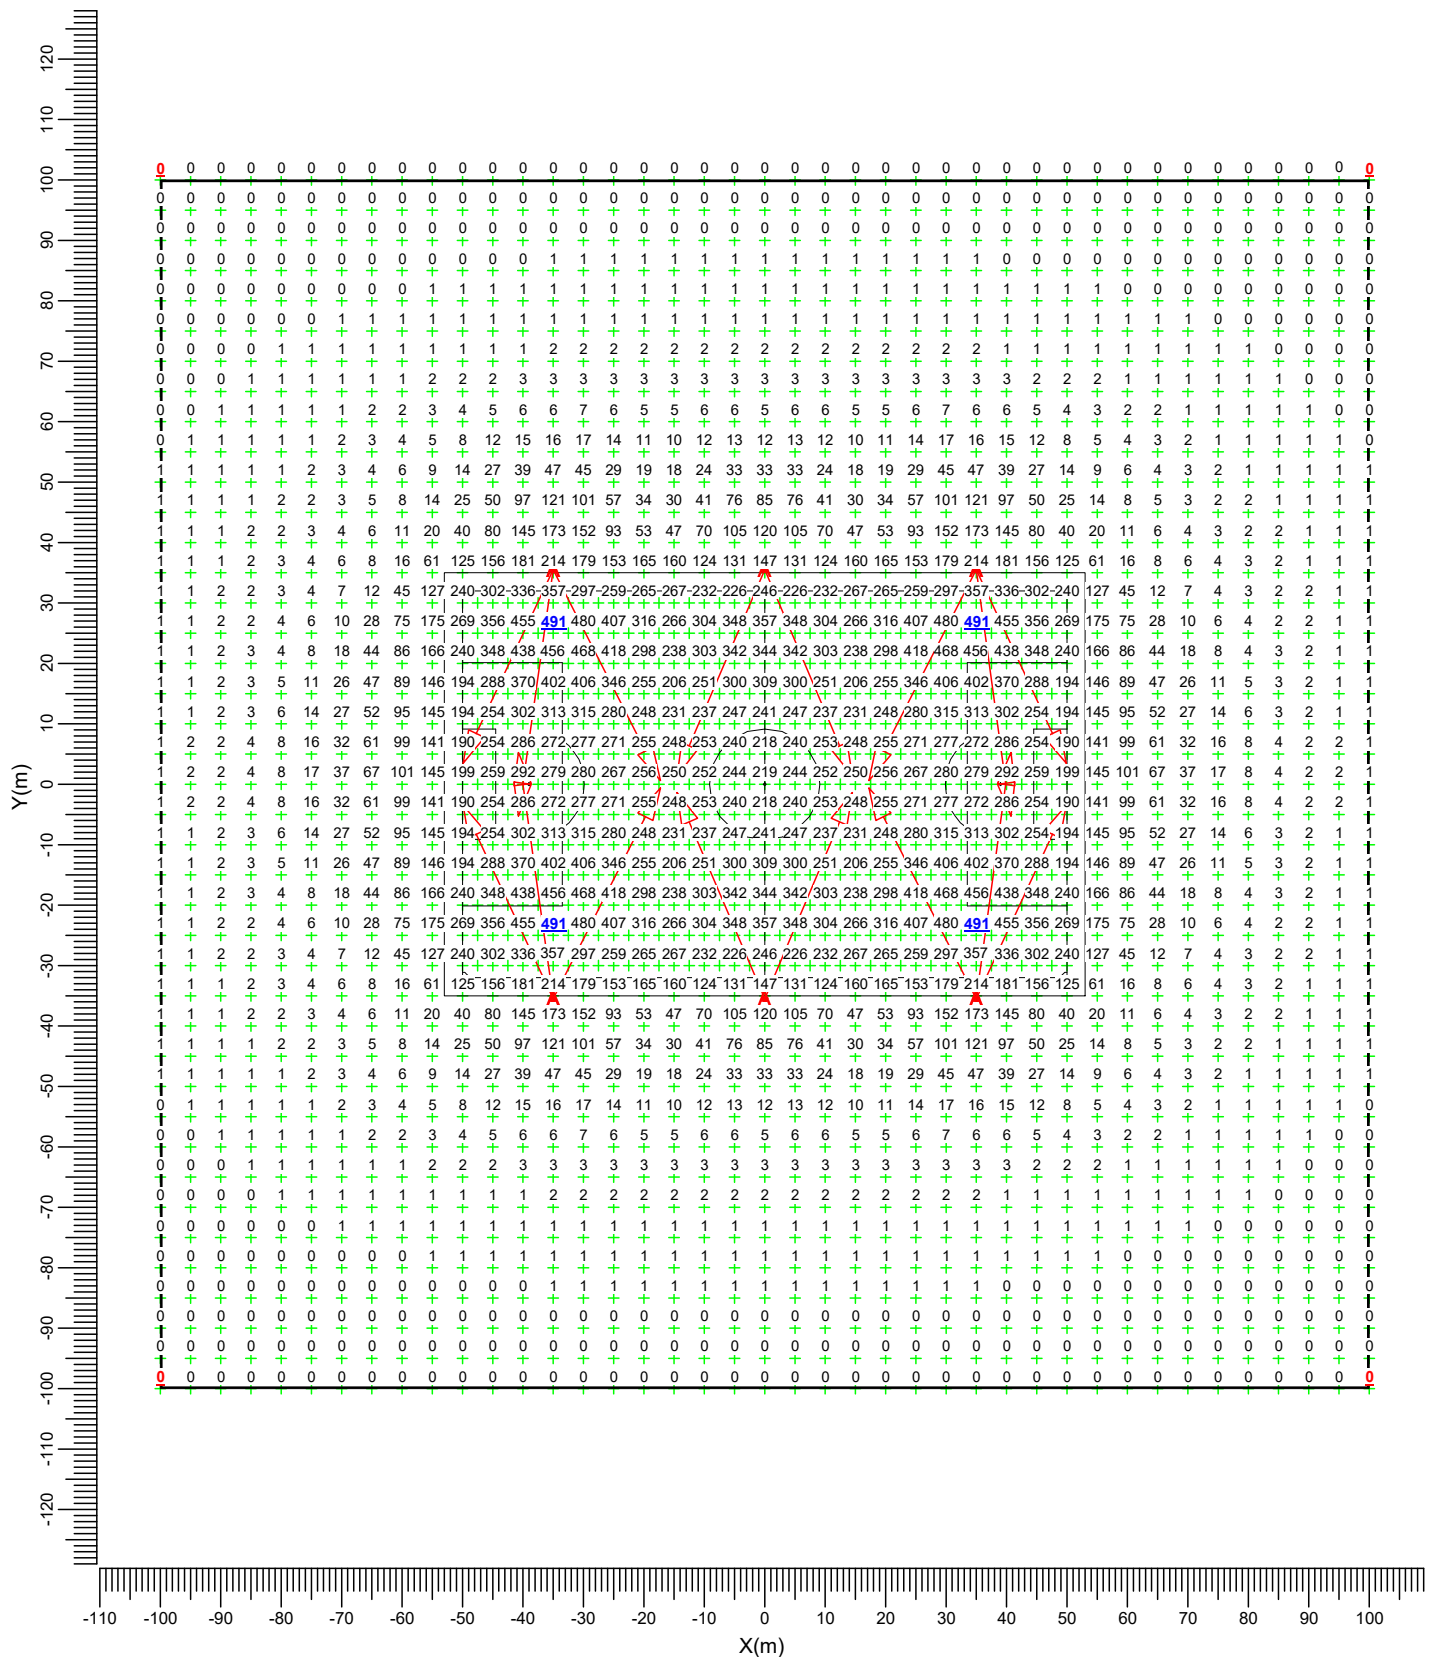

A  BVP528 A55-NB

Average
63.5

Min/Ave
0.00


Min/Max
0.00

Project maintenance factor
0.90

Scale
1:1250

3.3 Spillage: Iso Contour

Grid : Spillage at Z = -0.00 m
 Calculation : Surface Illuminance (lux)

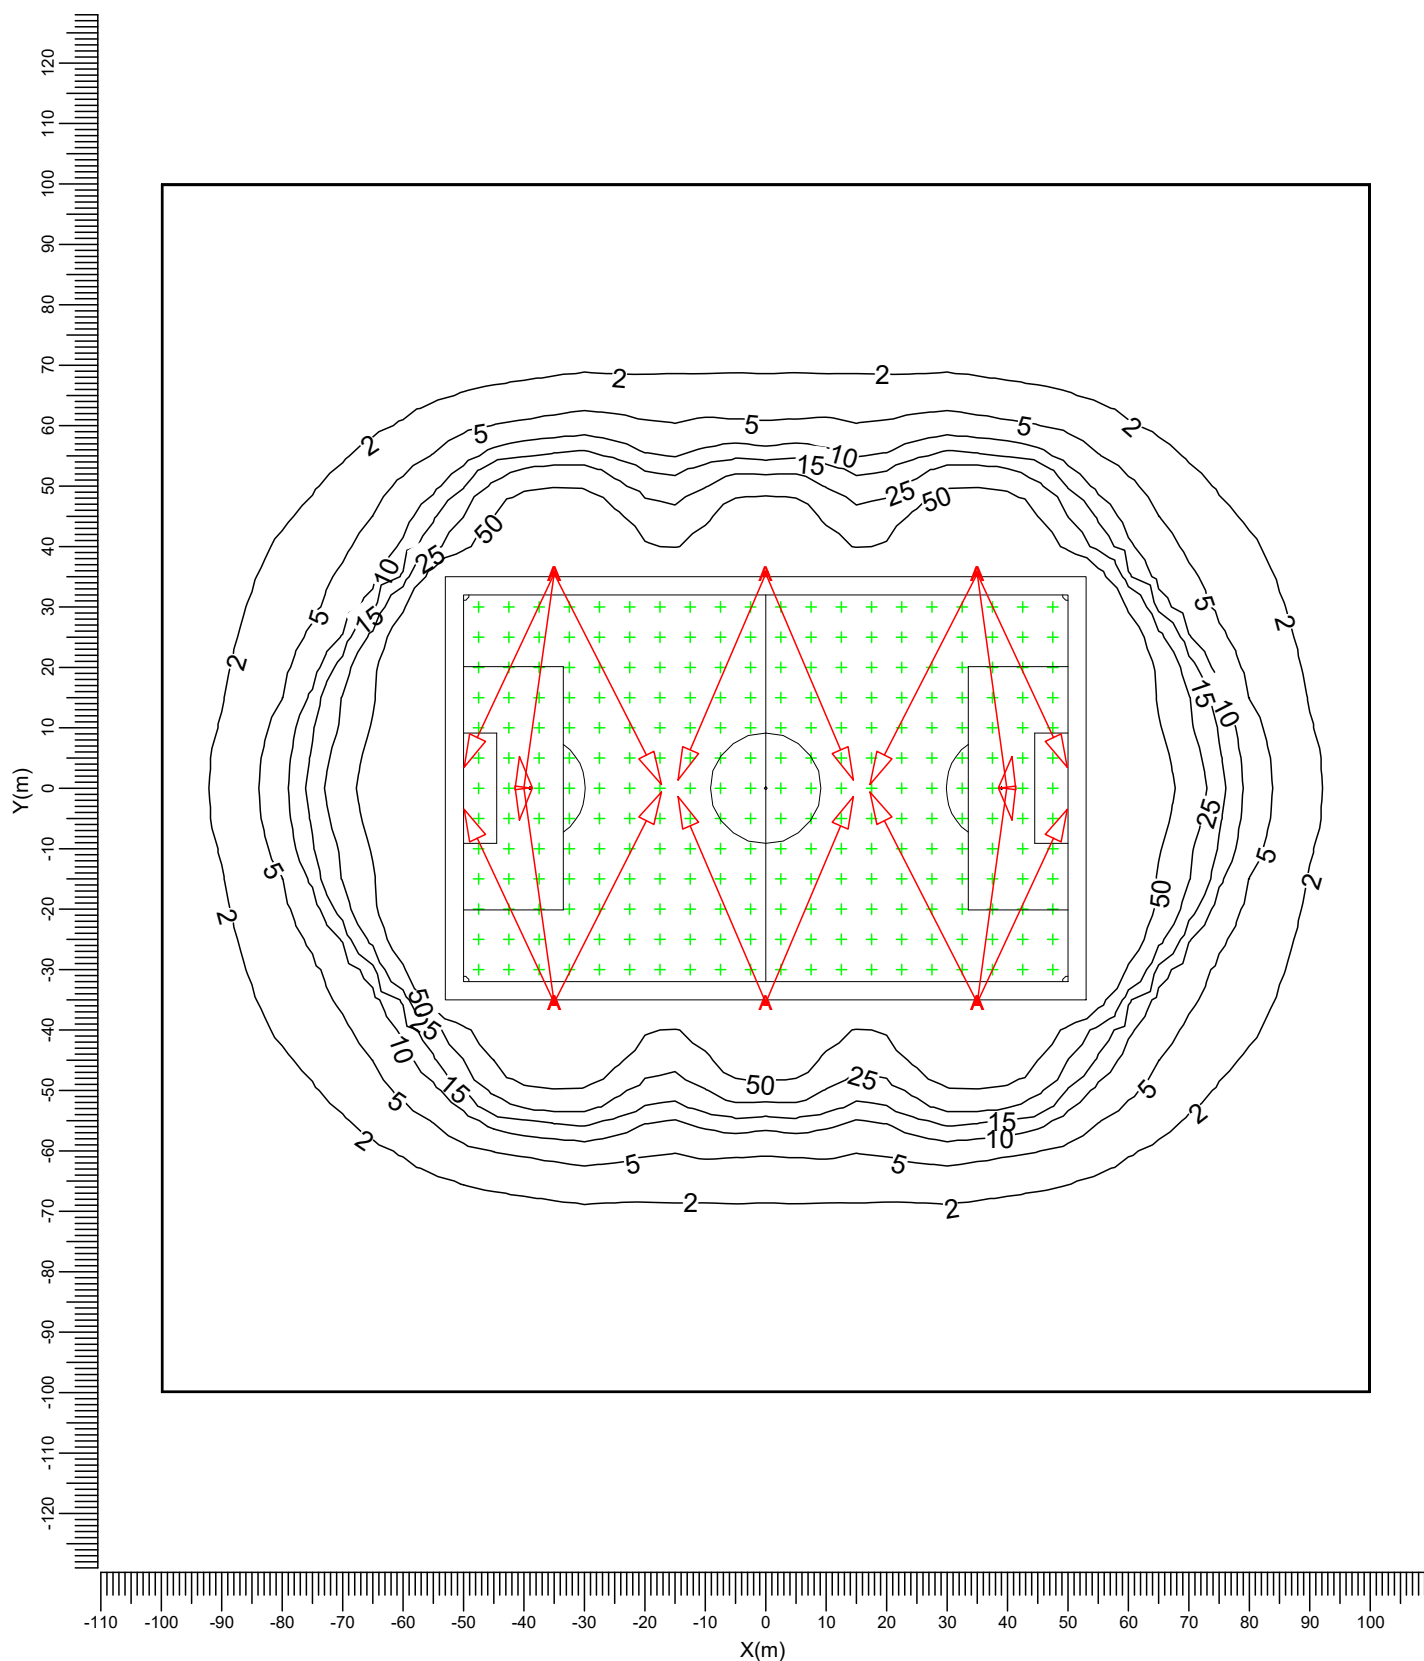

A  BVP528 A55-NB

Average
63.5

Min/Ave
0.00



Min/Max
0.00

Project maintenance factor
0.90

Scale
1:1250

3.4 Spillage: Filled Iso Contour

Grid : Spillage at Z = -0.00 m
Calculation : Surface Illuminance (lux)

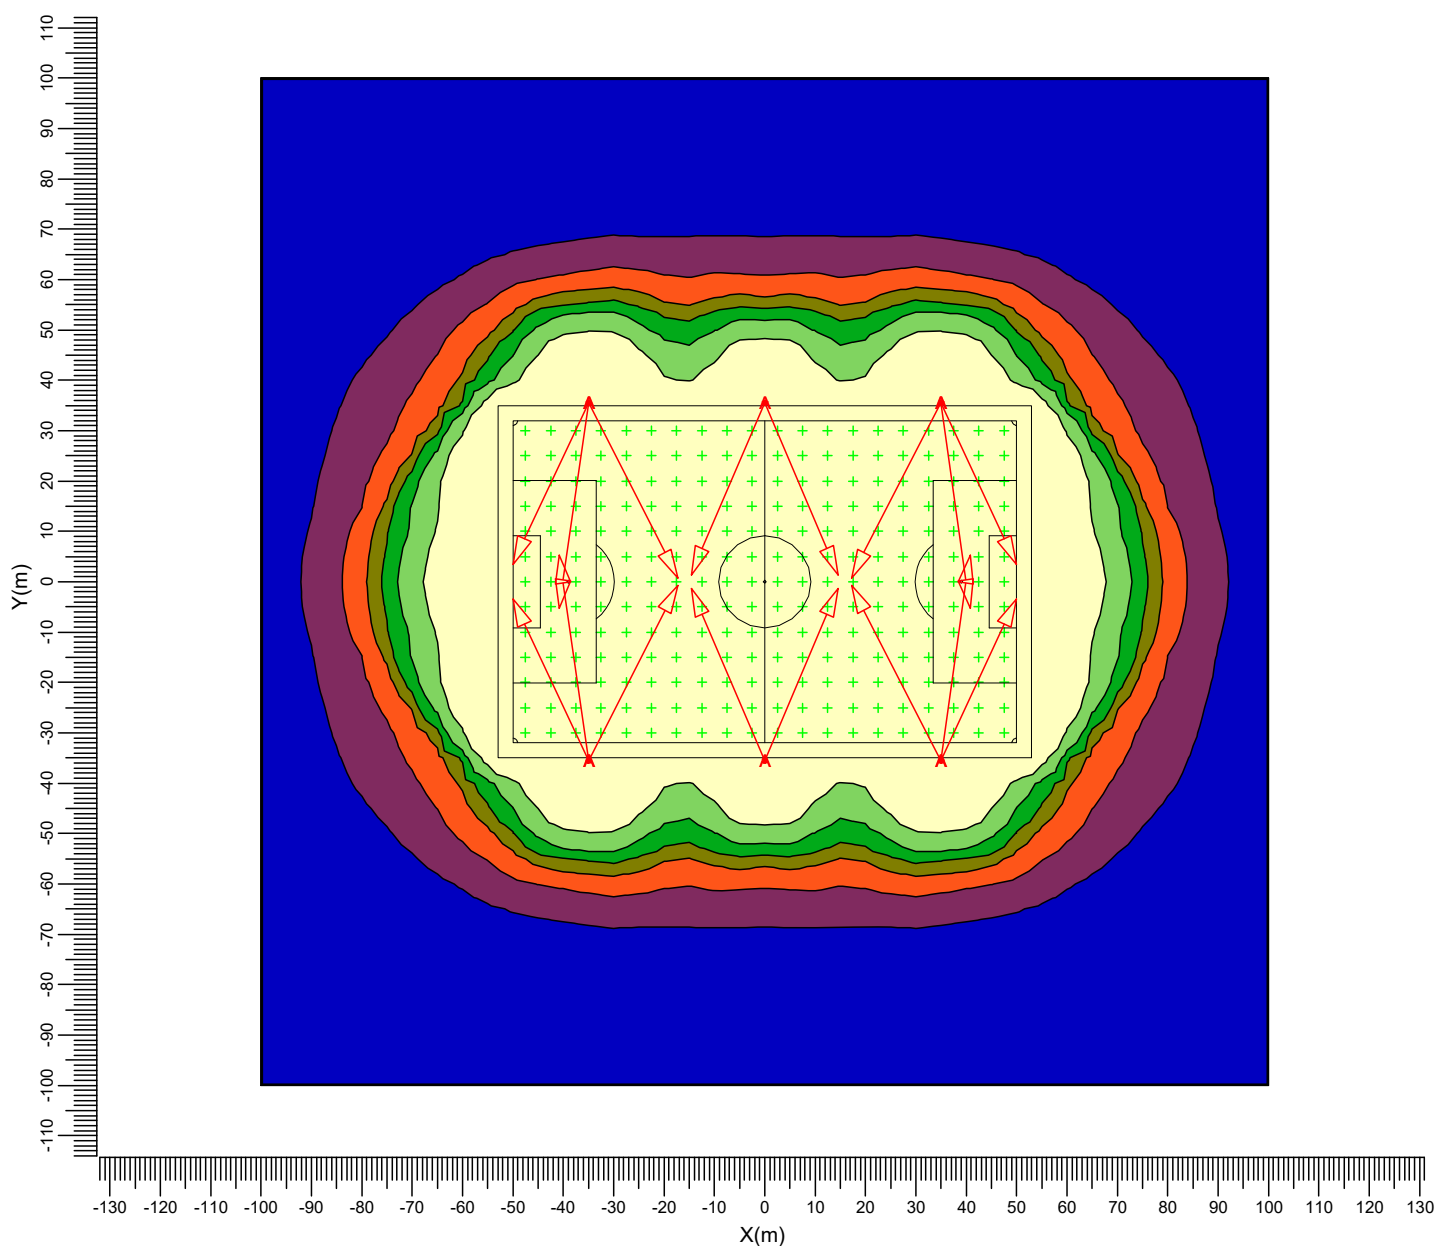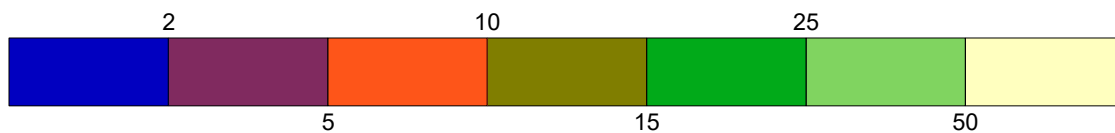

A  BVP528 A55-NB

Average
63.5

Min/Ave
0.00

Min/Max
0.00

Project maintenance factor
0.90

Scale
1:1500

4. Luminaire Details

4.1 Project Luminaires

OptiVision LED
BVP528 1xLED2220/757 OUT T15 50K A55-NB

Light output ratios

DLOR	: 0.84
ULOR	: 0.00
TLOR	: 0.84

Lamp flux : 222600 lm
Luminaire wattage : 1500.0 W
Measurement code : PRELIMA55N

Note: Luminaire data not from database.

