


STARBEAM AMBER

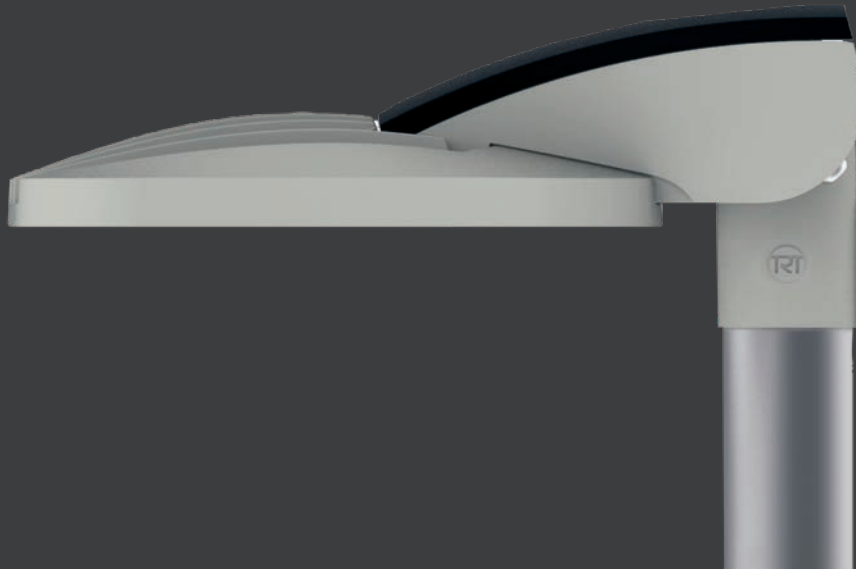

LED AREA FLOODLIGHTS AND STREET LIGHTS


IP66 IP65 SMART
VERSION IK10 CE LED

WINDAGE - small: 0.06m²

SPECIFICATION

- Die-cast aluminium body and gear compartment finished polyester silver RAL9006
- Die-cast aluminium, fast release gear compartment lid finished polyester graphite
- Polycarbonate cover and acrylic high efficiency LED lenses
- Integral high efficiency driver
- Extremely efficient and long system life up to 100,000 hours
- Smart External versions with intelligent lighting control for use up to 12 metres mounting height
- SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit
- Pole top 76mm as standard, adjustable through 90°
- Wall mounting bracket accessory
- Wide range of mounting options (see page 5 for details)
- Photocell option
- Fitted with 1750K LEDs
- Dominant wavelength = 590nm

PHOTOMETRIC GUIDE

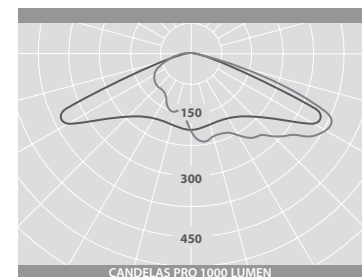

AREA DISTRIBUTION

Luminaire Lumen Output:
31W = 1970 lumens

LED CHARACTERISTICS

COLOUR TEMPERATURE	1750K
RATED LIFE (HOURS)	100K - L90/B10
PROTECTION	LED PROTECT
DRIVER EFFICIENCY	>90%
REPLACEABLE	YES
POWER FACTOR	>0.9
LL/CW	56.3

For LED characteristics explanation see
www.thorlux.com/led-guide

SmartScan Configurations



Find out more at www.thorlux.com/smartscan