


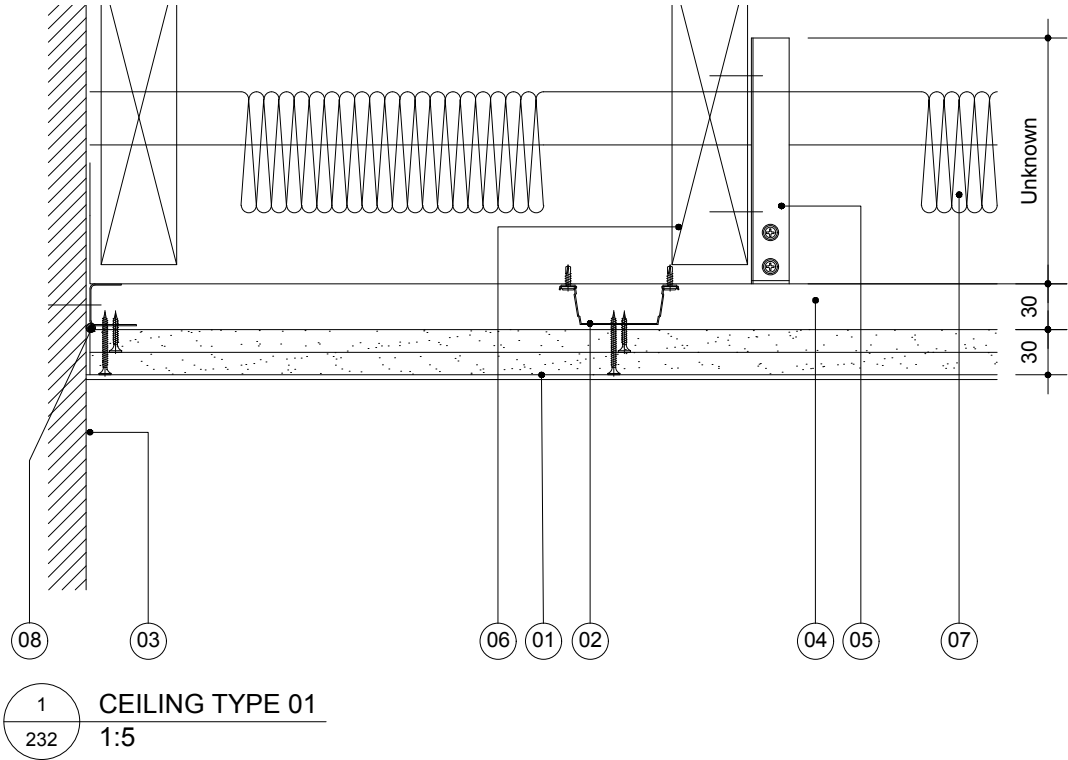

NOTES

- Two layers Gyproc plasterboard or Glasroc specialist board fixed with suitable British Gypsum screws at 230mm centres in field of board and 150mm centres at board ends. Plastered decorated finish, painted white.
- Gypframe MF5 Ceiling Sections at max. 450mm centres fixed to each MF7 with two suitable British Gypsum wafer head screws or MF9 Connecting Clip.
- Gypframe MF6 Perimeter Channel suitably fixed to wall at 600mm centres.
- Gypframe MF7 Primary Support Channels at specified centres.
- Gypframe FEA1 Steel Angle hangers at specified centres fixed to MF7 with two suitable British Gypsum wafer head screws and fixed to joists with two suitable British Gypsum screws (min. 35mm from bottom of joist).
- Assumed timber joist floor above. Investigations are required to fully understand the existing structure.
- Isover insulation where required to reduce sound transmission between the floors.
- Gyproc Sealant for optimum sound insulation.

All ceilings are proposed to receive this treatment.

Investigation works to the existing ceiling are to be undertaken prior to the commencement of works and ordering of materials in order to confirm design proposals.

Project:	Refurbishment of Existing Basement at Canolfan Soar		
Client:	Canolfan a Menter Gymraeg Merthyr Tudful		
Address:	Theatr Soar, Pontmorlais, Merthyr Tydfil, CF47 8UB		

Drawing Title: Ceilings as proposed			Scale: 1:5 at A3	
Project No: 22-1039	Drawing No: 232	Revision: -	Status: RIBA Stage 4	