


LIGHTING LEGEND	
EX3	IP65 Rated Post top lantern. 5539 Lumen (49W). 3000K. As Whitecroft Cygnus ST. Ref. CY12H03KG.
EX3	IP65 Rated Post top luminaire. 5657 Lumen (43.2W). 2700K. As Whitecroft Mistral small. Ref. MISH22KR.
EX3	Twin IP65 Rated Post top luminaire. 5657 Lumen (43.2W). 2700K. As Whitecroft Mistral small. Ref. MISH22KR.
EX4	IP65 Rated wall mounted luminaire. 1419 Lumen (17W). 3000K. 3 Hour emergency version. As Whitecroft Spectre. Ref. SPXAH23KGM.



ECOLOGY LEGEND	
	Bat tube on building elevation.
	Sparrow house nest box on building elevation.
	Bird bricks on building elevation.

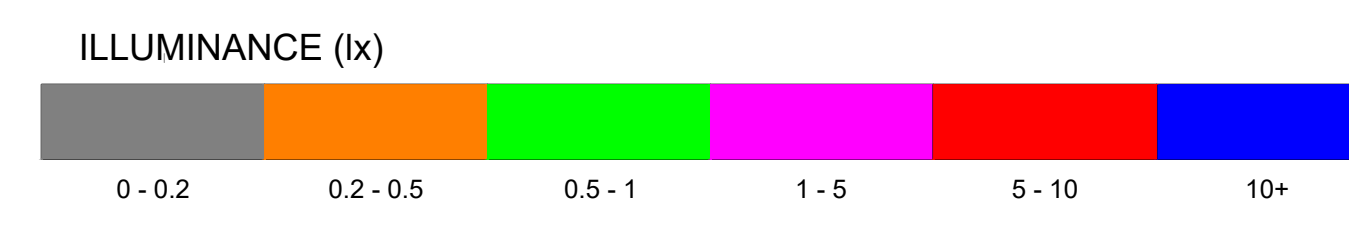

Fence line. 2.4m High 'wildmesh' fence.

Site boundary.

3.3 Calculation results, Exterior 1 - Bat Tube

3.3.6 Table, Bat Box - Bat Tube (0.475 x 0.200 (E))

[m]	[0.05] [0.05] [0.05] [0.05]
0.45	[0.05] [0.05] [0.05] [0.05]
0.40	[0.05] [0.05] [0.05] [0.05]
0.35	[0.05] [0.05] [0.05] [0.05]
0.30	[0.04] [0.04] [0.04] [0.04]
0.25	[0.04] [0.04] [0.04] [0.04]
0.20	[0.04] [0.04] [0.04] [0.04]
0.15	[0.04] [0.04] [0.04] [0.04]
0.10	[0.04] [0.04] [0.04] [0.04]
0.05	[0.04] [0.04] [0.04] [0.04]

Note:
External lighting time clocks c/w photocell input to avoid illumination of external lighting during hours of daylight.
External lighting time clock controls to be commissioned to provide illumination only between dusk - dawn. Final commissioning hours agreed as lighting to be switched off from 21:00 - 06:00

Health & Safety Hazards and Risks

All works indicated on this drawing are to be carried out by a Contractor competent to undertake the works.
Specific hazards relating to the works are indicated on this drawing.
These are in addition to the normal hazards and risks faced by a competent person or contractor when dealing with the types of works indicated on this drawing.

General Notes

1. Do not scale from this drawing.
2. All dimensions are in millimetres unless stated otherwise.
3. Prior to commencing any works all relevant dimensions & site features are to be verified against contractual information.
4. All proprietary components are to be installed in accordance with the Manufacturer's current written instructions.

Rev	Date	Description	By
C08	03.07.2026	2.4m High fence line & site boundary added.	MC
C07	26.06.2026	Isoline colours revised.	MC
C06	01.06.2026	Isoline colours added.	MC
C05	22.06.2026	Construction issue.	MC
C04	22.06.2026	Construction issue.	MC
C03	13.04.2026	Construction issue.	MC
C02	13.04.2026	Construction issue.	MC
C01	03.04.2026	Construction issue.	MC
P2	18.02.2026	Preliminary issue for review and comment.	MC
P1	01.09.2025	Preliminary issue for review and comment.	MC

Suitability Number Key

WIP
S0 - Work in Progress *

Shared
S1 - Fit for co-ordination **
S2 - Fit for information
S3 - Fit for internal review & comment
S4 - Fit for construction approval

Documentation
D1 - Fit for costing
D2 - Fit for tender
D3 - Fit for Contractor design
D4 - Fit for manufacture / procurement

BS 1192:2007
Documentation Sign-off
A - Fit for construction
B - Fit for construction with comments
C - Comprehensive revisions needed

Archive
AB - As Built
FC - Final construction

** For internal pre-issue usage only
* For model file usage only

Project Title
Goetre Primary School
Merthyr Tydfil County Borough Council

Client
Mitie Technical Services Ltd

Discipline
Mechanical & Electrical

Scale
1:250

Job Number
252615

Date
Aug 2025

Drawing Status
Construction

Suitability
A

Revision
C08

Project - Origin - Zone - Level - Type - Role - Number
28CB01-MIT-30-00-D-OE-9002

Carton House
435-451 Cowbridge Road East
Cardiff
CF5 1JH

Tel: 029 2022 1431
Fax: 029 2023 7444
www.hollowaypartnership.co.uk

Holloway Partnership

© Holloway Partnership