




Electrically operated roller shutter doors polyester powder coated finish both sides with Colorcoat Prisma Grey Aluminium (RAL 9007)

3.

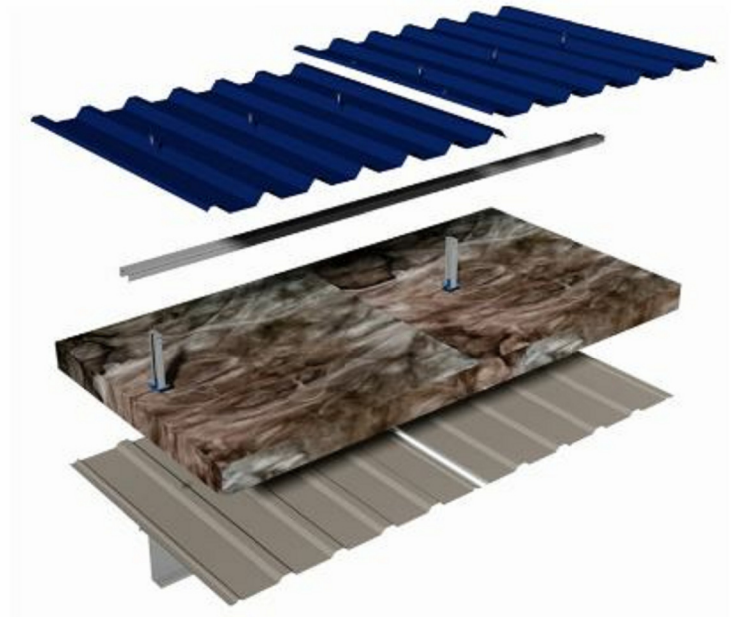

4&6.



1.



2.



7.



Roof covering - CA Group Twin-Therm Built up Roof Cladding Syetem Colorcoat HPS200 Ultra Goosewing Grey (RAL 7038)

Glazed screen, window & door frames finished with Colorcoat Prisma Grey Aluminium (RAL 9007) & fascia/ soffits & gutters finished with Colorcoat HPS200 Grey Aluminium (RAL 9007)

TATA Steel insulated Trimapanel System finished with Colorcoat Prisma Silver Metallic (RAL 9006)

Wall cladding - CA Group Twin-Therm Wall system CA 32 1000W Wall Profile, horizontal finished with Colorcoat HPS200 Ultra Merlin Grey (RAL 180 40 05)

Facing brickwork (Ibstock Ivanhoe Cream or similar)

NOTE: Report all errors and omissions to the Architect. All dimensions to be checked on site before fabrication.

Contractors must verify all dimensions on site before setting out, commencing work, or making any shop drawings.

- All dimensions must be checked on site
- All setting out to be checked on site
- All levels must be checked on site and their datum confirmed
- This drawing must be read in conjunction with the relevant specification clauses
- This drawing must not be used for land transfer purposes

P1	Planning Condition Discharge	MAS	29/03/2020	MAS
Revision	Description	Drawn	Date	Checked

Client's Name
M Delacey & Sons

Job Title
Goat Mill Road, Dowlais,
Merthyr Tydfil

Drawing Title
Planning Condition 3 -
Industrial Unit Material
Bay Study

Scale
1 : 25 @A1

Job No
1047

Drawing
410

Status
PLANNING CONDITIONS

Rev
P1

MAS
Architecture

TELEPHONE +44 (0)1252 643298

EMAIL mike.simpson23@ntlworld.com

MOBILE +44 (0)777 208 3303

