
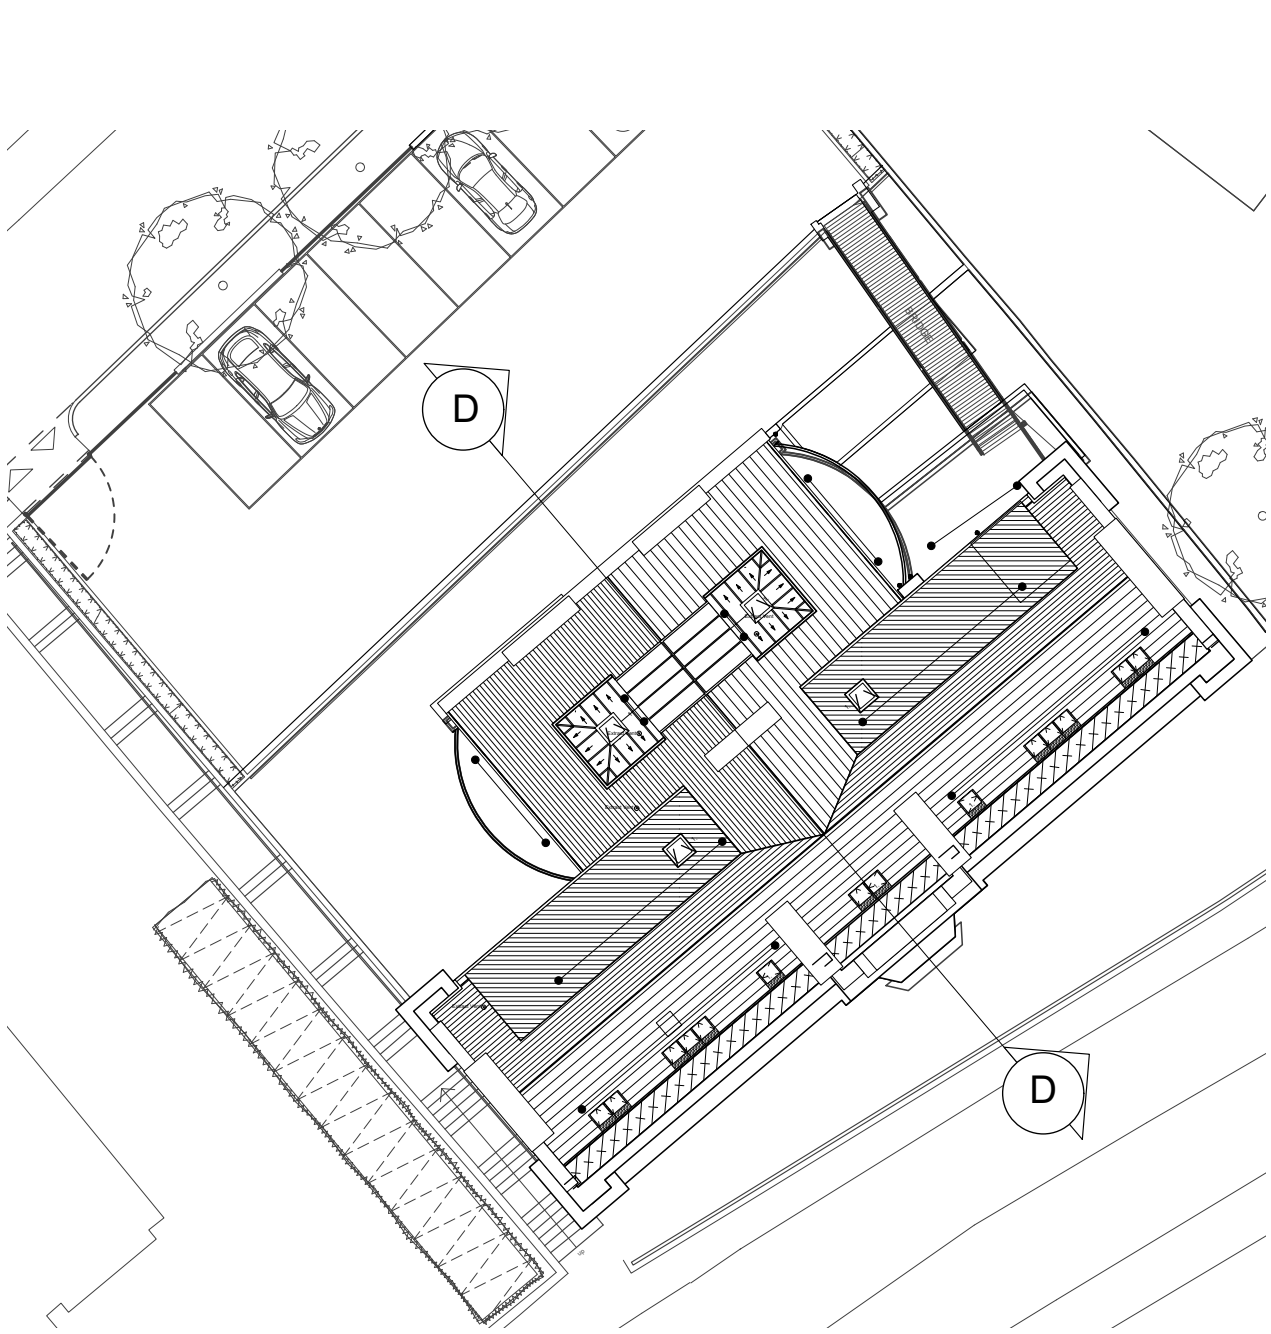


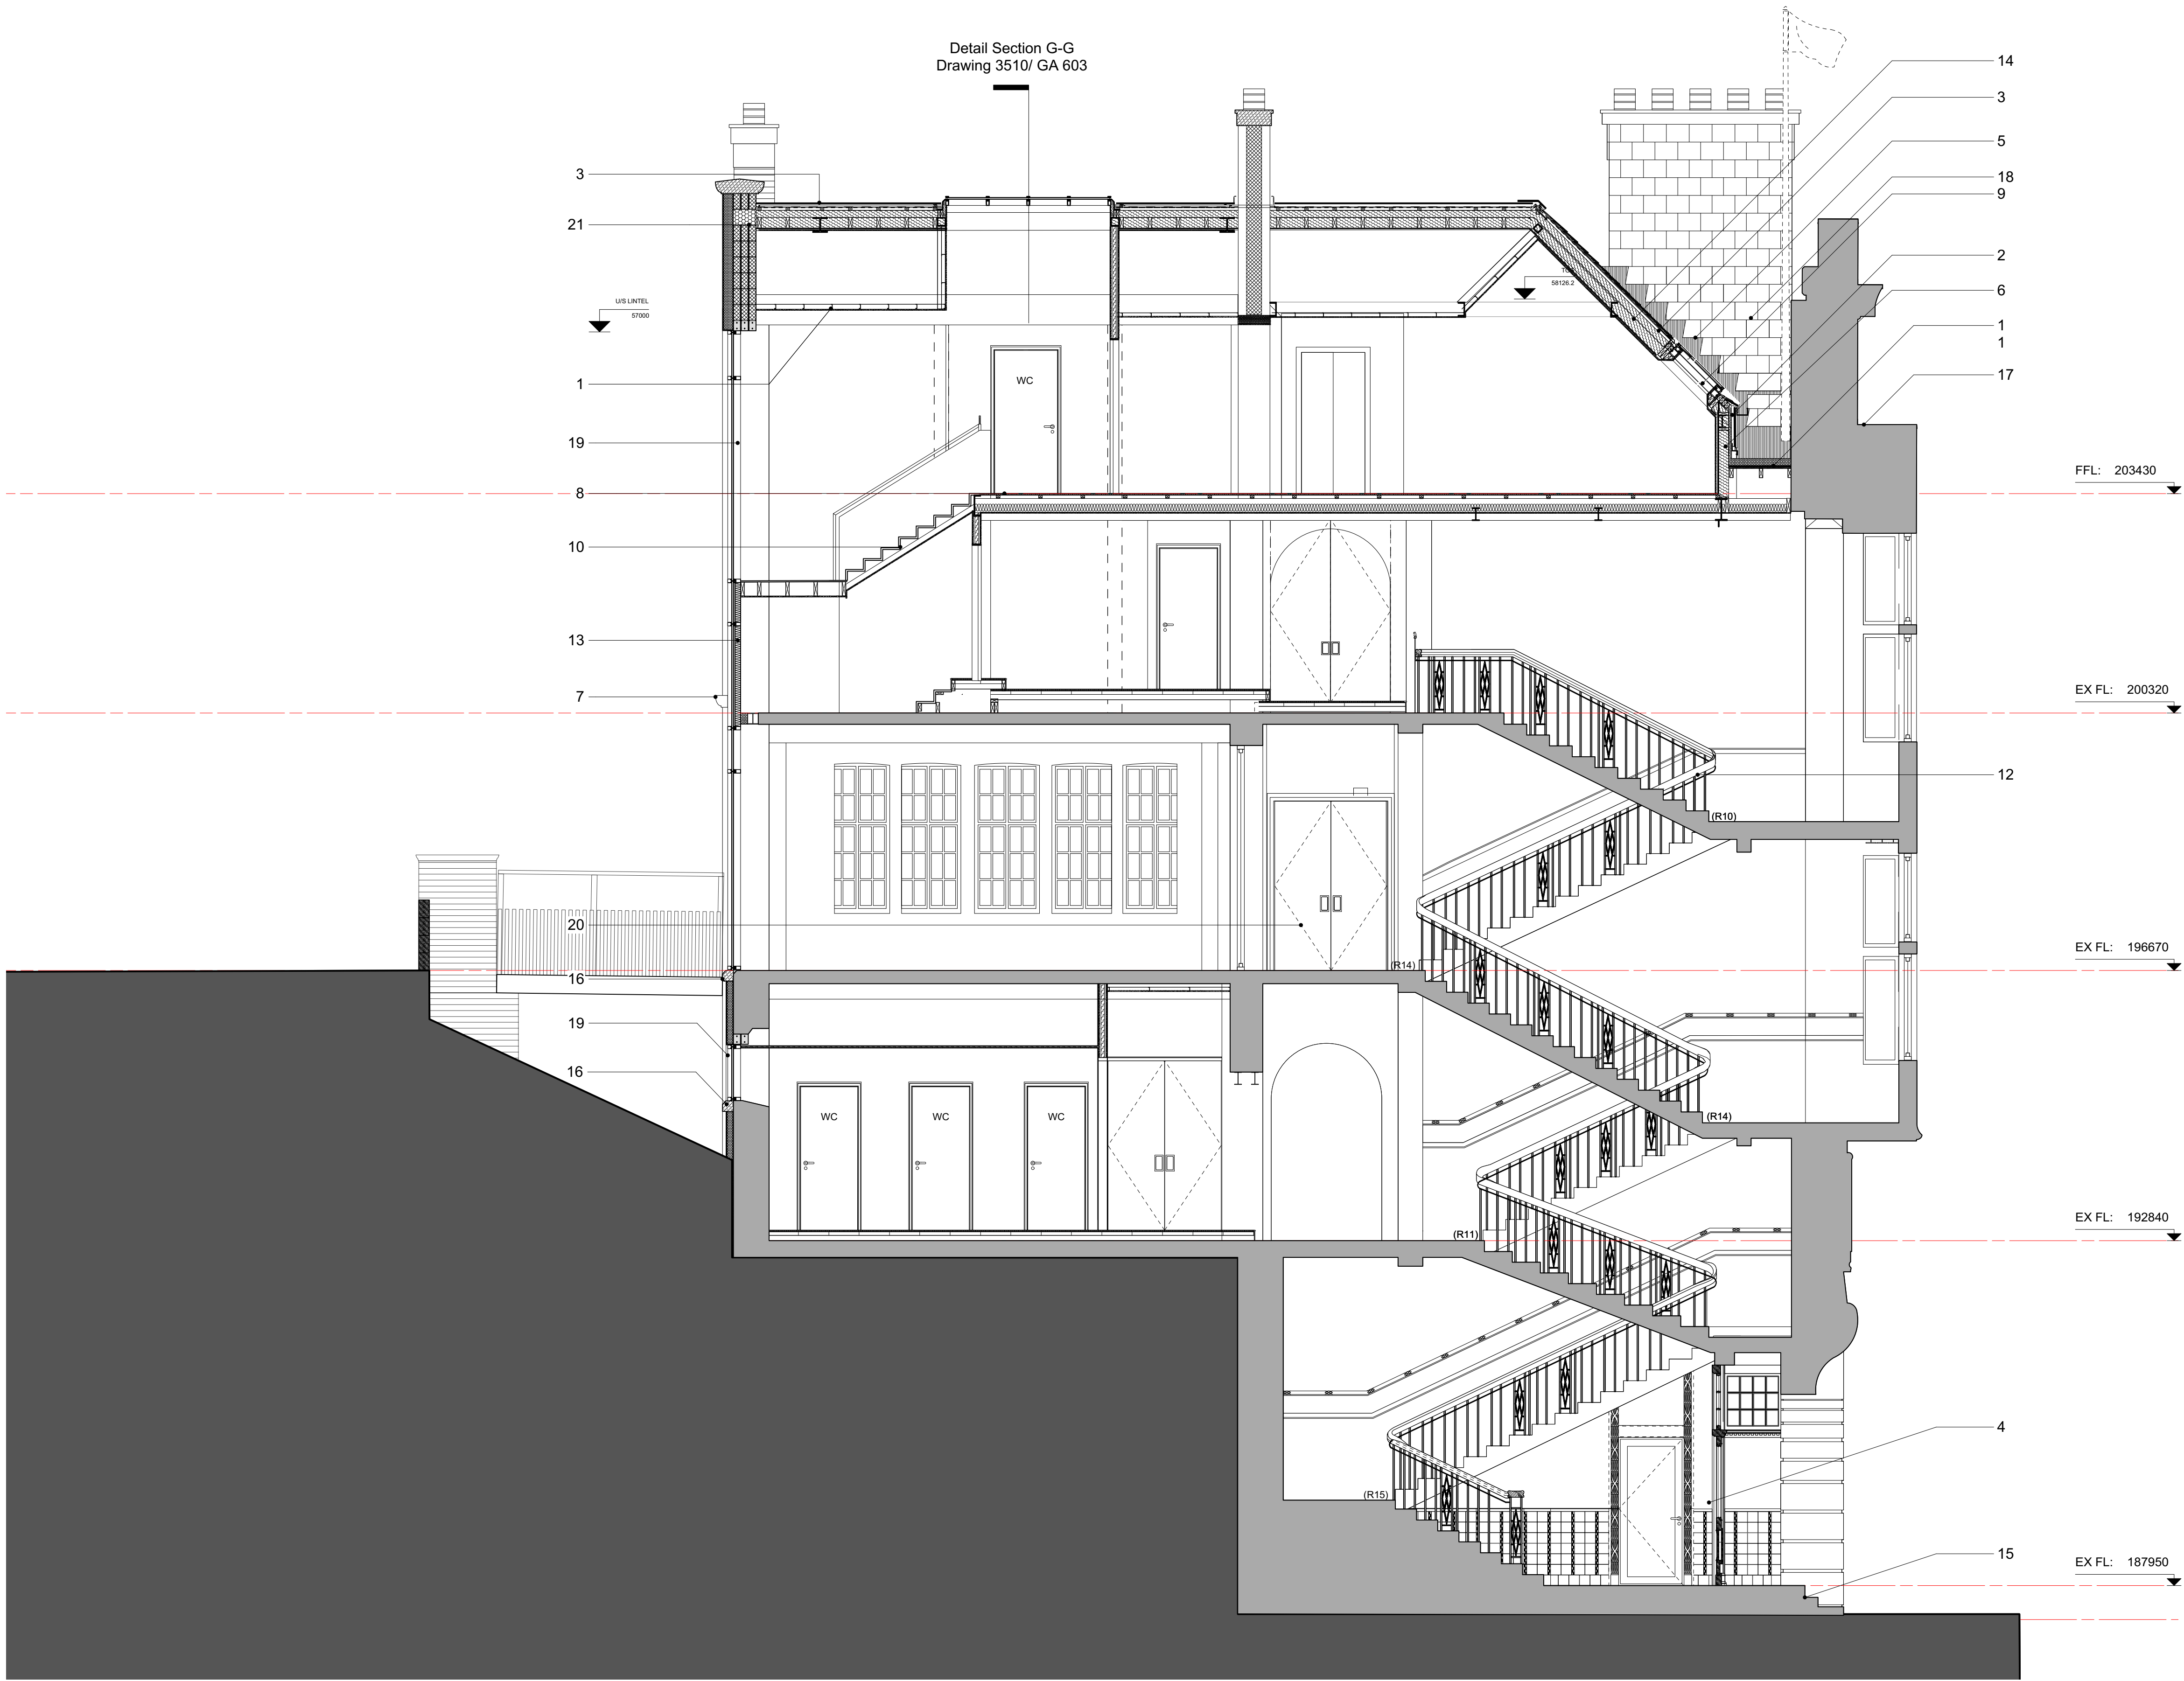

Key Plan - SCALE 1:250 @ A1

GA 503- Section D - D as Proposed
SCALE 1:50 @ A1, 1:100 @ A3

Notes:

Responsibility is not accepted for errors made by others scaling from this drawing.

All construction information should be taken from figured dimensions only. Dimensions are in millimetres unless otherwise stated.

All dimensions and conditions are to be checked on site prior to preparing drawings or commencing any work.

Any variations or supplementary drawings are to be approved by The Architect.

Notes

- 13mm plasterboard ceiling supported on proprietary metal suspended ceiling system, K10.221a
- Box section PPC aluminium gutter, R10.312. Depth to match depth of terracotta cladding below.
- Natural slate roof on 25 x 50mm treated battens, on breather membrane over 38mm counterbattens. Counterbattens fixed using proprietary screws through 80mm Pavatherm sarking insulation. H62.105A.
- Glazed entrance doors, refer shopfront drawings.
- 13mm plasterboard ceiling on 25mm battens fixed to underside of ceiling joists/rafters, K10.250.
- Zinc cladding on 18mm plywood on 50 x 50mm vertical battens fixed back to plywood board through sheathing insulation, at vertical stud locations. H74.151

- Nom 100 x 150mm terracotta stringcourse supported on proprietary stainless steel anchor system with thermal breaks. F30.767.
- Particle board floor comprising nom 22mm boards on 200 x 50 sw joists as SE details, K11.325A.
- Aluminium rooflights. Multiple rooflights to have 'type A' links. Spec L10.481.
- Timber stair and handrails (specialist joinery company)L30.271, L30.580. Going 250mm, risers nominally 152mm Pitch nominally 32 degrees.
- Single ply warm deck roof covering. J42.112.
- Existing guarding to be replaced and/ or supplemented with 900mm - 1100mm high handrail. See 'Improvmnts to existing building' notes.

- Proprietary Aluminium Curtain walling system with insulated panels behind opacified glazing, H11.110
- Rafters as SE details with with Pavaflex insulation. P10.140A
- Repair and Renovate existing stone steps, C40, C41
- nom 100 x 150mm terracotta cill supported on proprietary stainless steel anchor system with thermal breaks. F30.767.
- Code 6 lead covering fitted to all cornices, parapet walls and projections in accordance with the LSA manual. H71.250.
- Take down existing chimney, carefully cleaning and setting aside masonry and components to agreed level and fit lead tray and flashings. H71.472. Re-build using existing materials to mach existing.

- Proprietary aluminium curtain walling system, H11.110
- New timber fire rated intrnal door set on hold open device, L20.231, refer schedule and detail drawings.
- Loadbearing Thermoblock, in lieu of blockwork at junction with roof. To ensure continuation of insulation line. F30.186.

D	23/03/2020	Bridge added to the background. Title block altered.
C	29/09/2016	Rear chimney omitted. Existing retained in lieu.
B	16/09/2016	Section altered to accord with elevations and plans, predominantly third floor arrangement. Notes reduced and altered accordingly.
A	29/06/2016	Notes added to include NBS.
NO.	DATE	REVISION

CLIENT

Merthyr Tydfil CBC

PROJECT

YMCA, Merthyr Tydfil

DRAWING TITLE

Section D - D

DRAWN/CHECKED

DC, TR

SCALE

1:50 @ A1

DATE

Aug. 2019

DRAWING NO.

3510_GA_503

REV.

D

DAVIES SUTTON ARCHITECTS

Penhevod Studios • Penhevod Street
Orangelow • Cardiff • CF11 7LU
Tel: 029 2066 4455 • Fax: 029 2066 4411
E-mail: office@davies-sutton.co.uk
Web: www.davies-sutton.co.uk

DO NOT SCALE FOR CONSTRUCTION PURPOSES • ALL DIMENSIONS TO BE CHECKED ON SITE • NOTIFY ARCHITECT OF ALL DISCREPANCIES • THIS DRAWING IS COPYRIGHT