
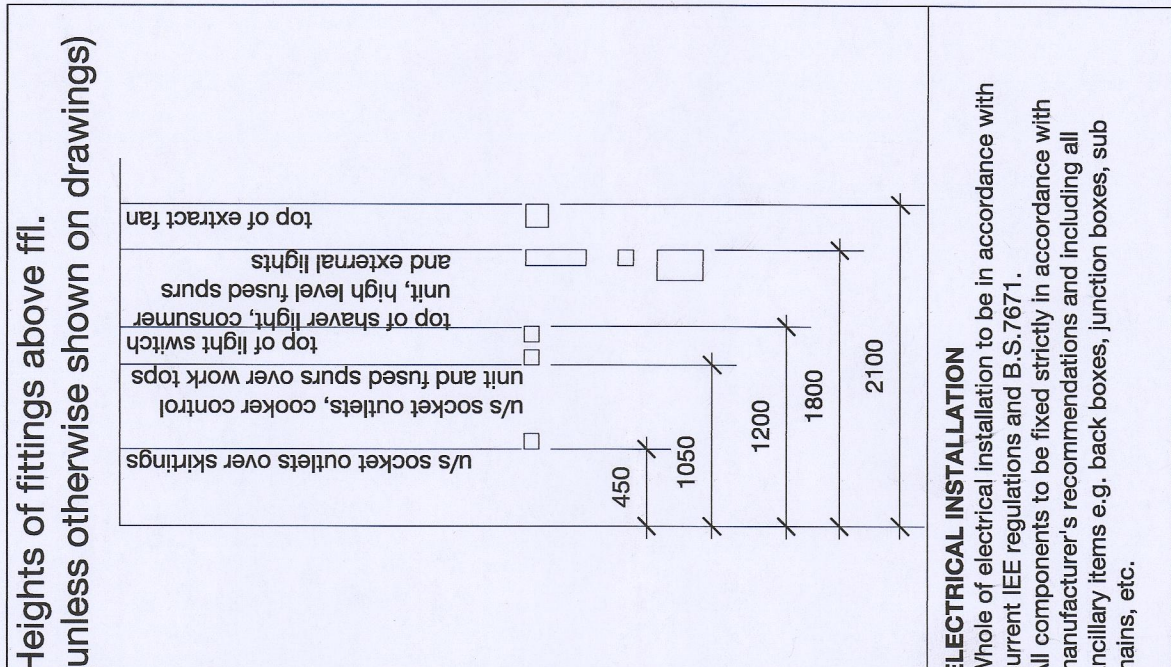


KEY TO ELECTRICAL FITTINGS	
	MK 1196 WHI low energy pendant light fitting set with external wall mounted light fitting
	MK 1157 WHI ceiling mounted pendant set
	MK 1173 WHI ceiling mounted pendant holder
	MK 4870 WHI wall mounted single switch
	MK 4871 WHI wall mounted 2-way switch
	MK 3191 WHI ceiling mounted cord switch
	MK 3257 WHI wall mounted double socket
	MK 3247 WHI wall mounted double socket
	MK K780 WHI wall mounted single socket at low level with MK K1060 WHI switch mounted over worktop above
	MK K370 WHI wall mounted fused spur
	MK K3520 WHI wall mounted to socket with co-ax cable to signal booster housed in roof void
	MK K422 WHI wall single telephone socket wired back to BT entry point
	Mira Advance ATL 8.7kw wall mounted electric shower and fittings. Colour white.
	MK 608 WHI shaver light and socket
	MK K5060 wall mounted cooler control unit
	MK Sentry 16 way consumer unit complete with mini circuit breakers and enclosure
	Smoke alarm to BS 5446:Part 1 (optical), mains powered with 72 hour battery back up.
	XPS 6835-2-40 with integral lumidustat, manual override controller and back draught shutter. Extract rates to conform with Building Regulations. Bathroom/e-n-suite extract to outside air claim gives 15 m³ per second. Kitchen extract 60 m³ per second. To include for fused switchgear per connection.
	Extract fan as above but vented through roof.



MERTHYR TYDFIL
COUNTY BOROUGH COUNCIL
Town & Country Planning Act 1990
PERMISSION GRANTED SUBJECT TO CONDITIONS

- 1 JUN 2021

J JONES
BA(Hons) BTP MR.T.P.I
HEAD OF TOWN PLANNING

648.010A	Proposed plans		
building	1:50@A1	Jan 2020	CG
1st Floor Woodfield Studios 62 High St Merthyr Tydfil CF37 8DE 07303328652 hello@georgandco.studio www.georgandco.studio			
DO NOT SCALE THIS DRAWING			@George and Co.

NOTES:
 Timber frame and trusses to manufacturers design and spec, to be submitted to building control before erection.
 Contractor to locate drainage before works start.
 Contractor works at risk until approval of building control.
 All new windows to have egress hinges