


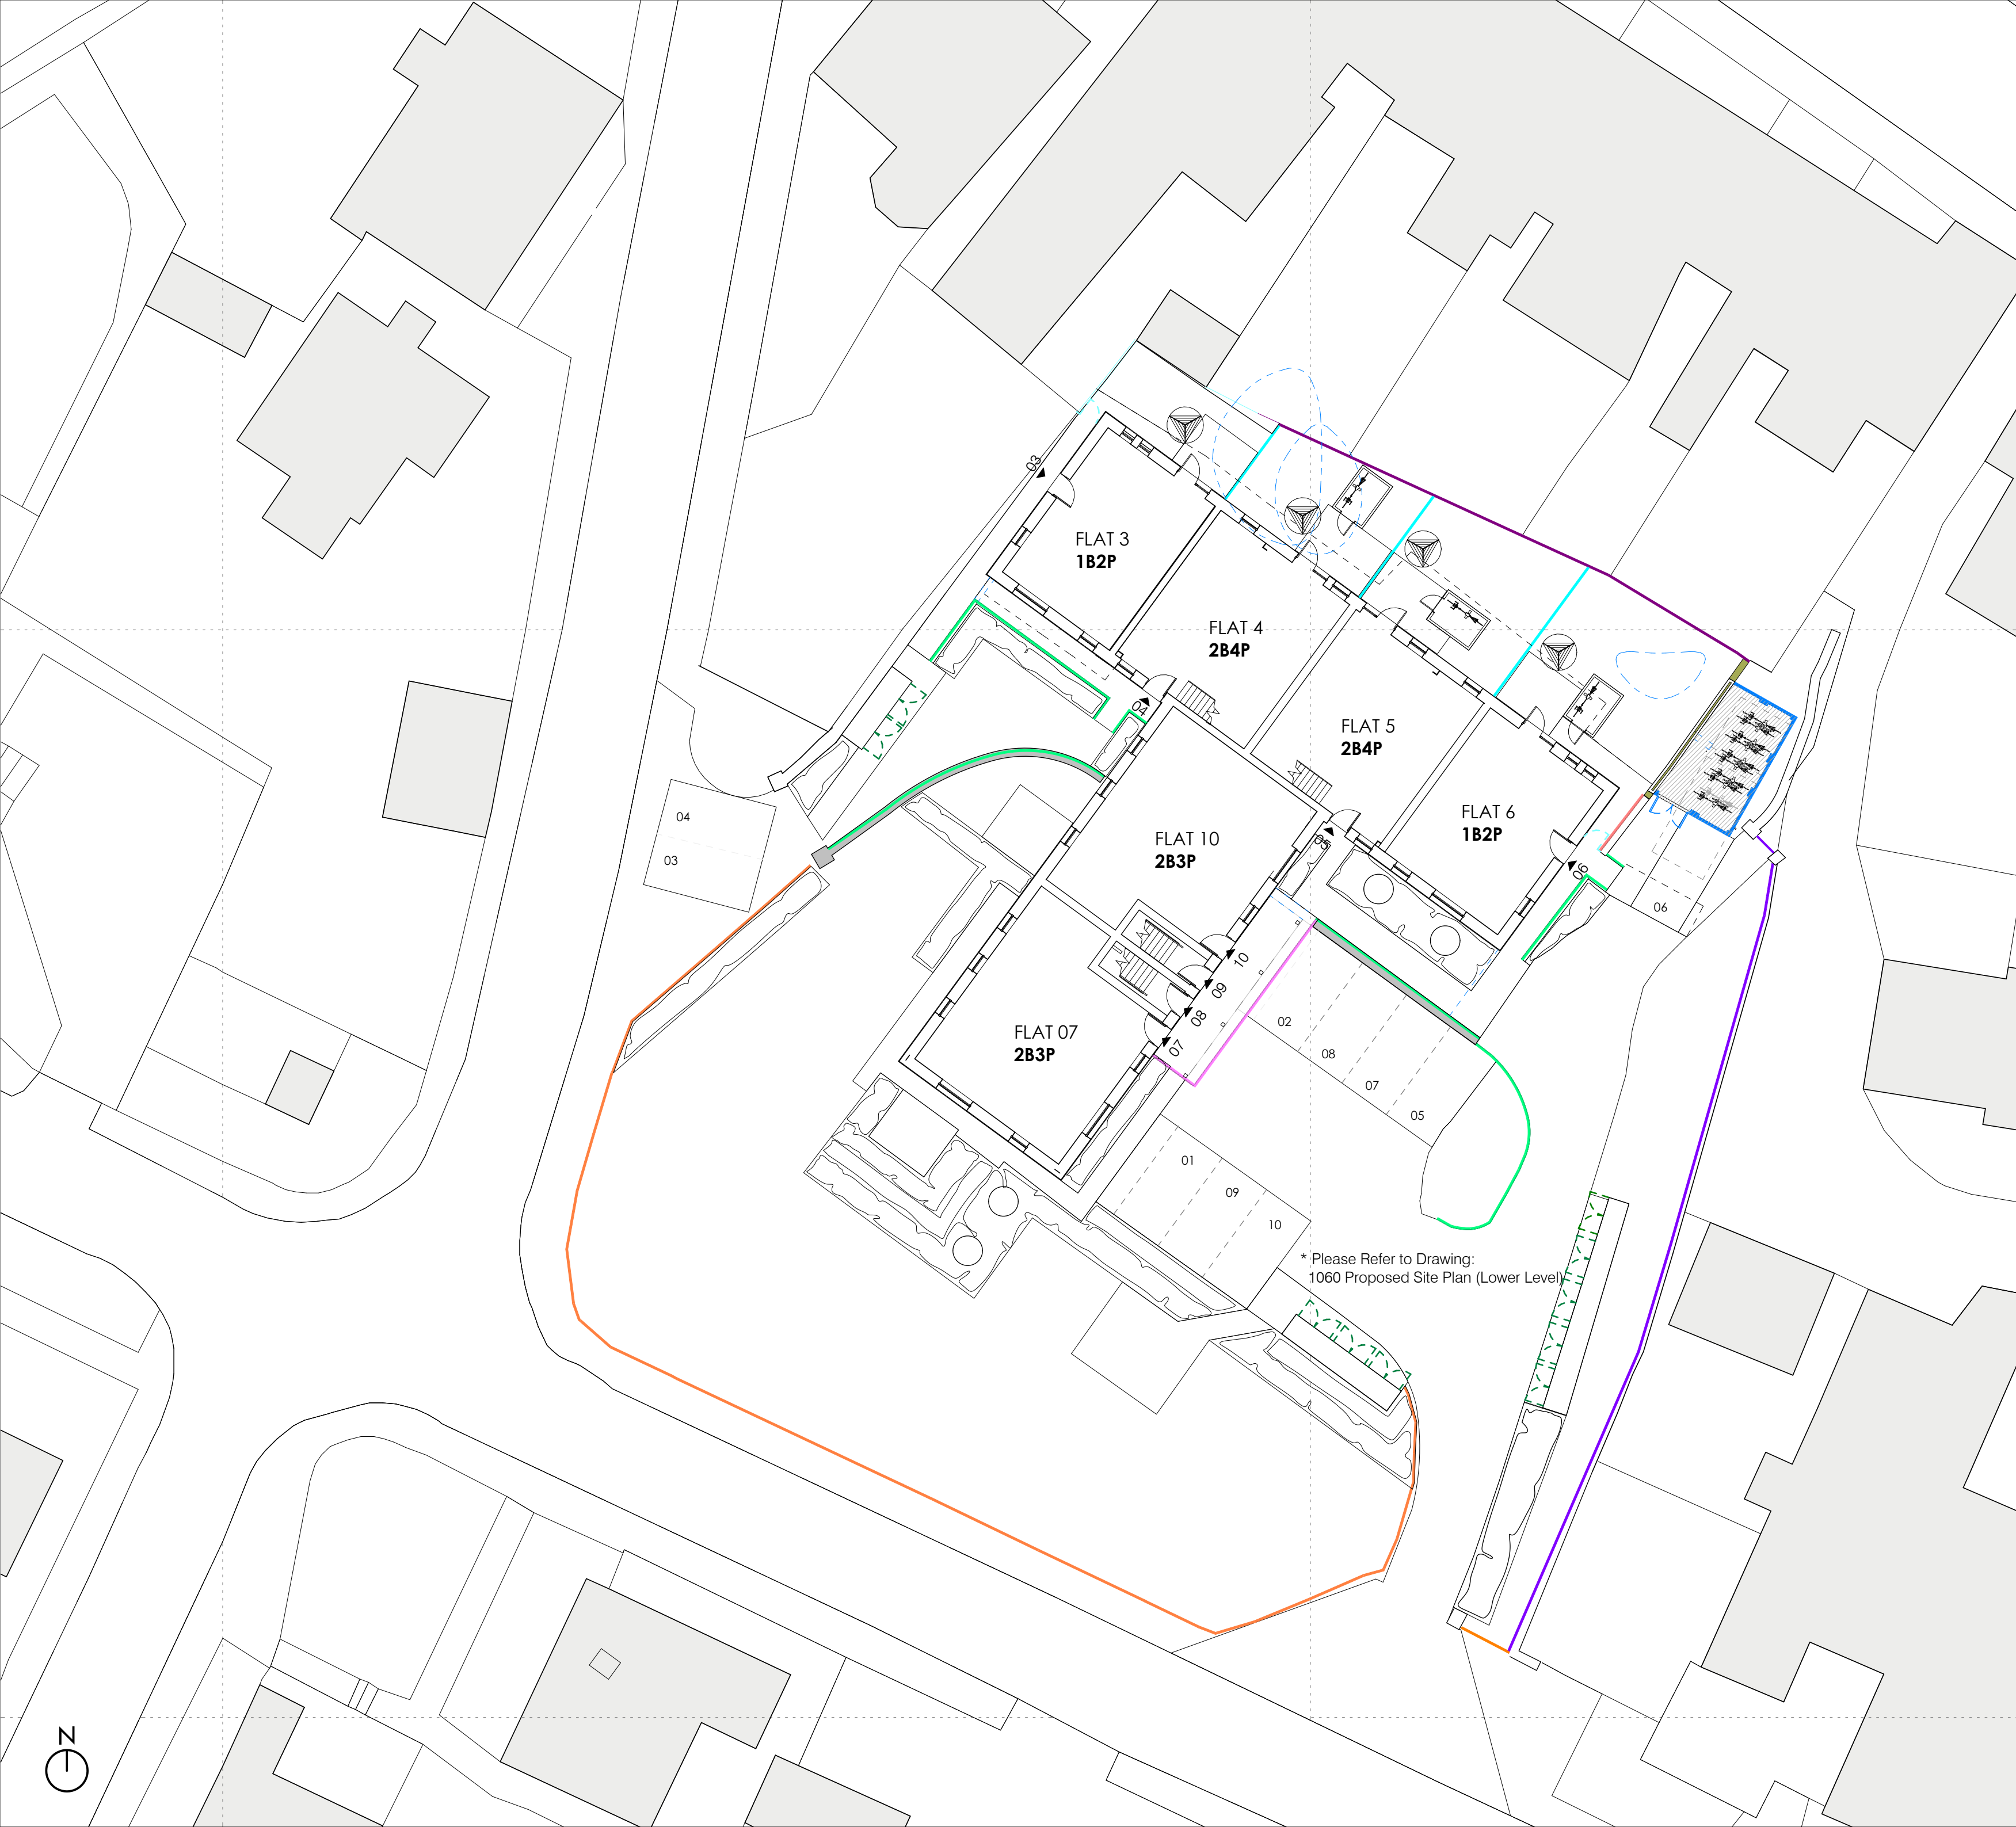

- Notes:
1. Drawings must not be scaled and any discrepancies must be reported immediately.
 2. The drawing is to be read in conjunction with all other relevant project drawings and schedules.
 3. Dimensions indicated are structural.
 4. Drawing must be printed in colour to ensure all elements are clearly identified.

Proposed Boundary Key

- Boundary Type 01 - New Railings
Galvanised Powder Coated Steel Railings at least 1100mm height.
- Boundary Type 02- New Railings on top of existing brick wall
Galvanised Powder Coated Steel Railings fixed to inside face of wall and to provide overall guarding height of at least 1100mm. Retaining wall to be repaired as necessary and new copings provided.
- Boundary Type 03- New Railings on top of existing stone wall
Galvanised Powder Coated Steel Railings fixed to inside face of wall and to provide overall guarding height of at least 1100mm. Retaining wall to be repaired as necessary and new copings provided.
- Boundary Type 04- New Railings provided on deck access
Galvanised Powder Coated Steel Railings at least 1100mm height.
- Boundary Type 05- New fence on top of existing wall
Hit and miss timber fence on top of existing wall (height varies) provide at least 1800mm overall height.
- Boundary Type 06- New fence
Hit and miss timber fence at least 1800mm height.
- Boundary Type 07- New fence
Close boarded timber fence at least 2100mm height.
- Boundary Type 08- New wall on top of existing
Existing wall to be taken down to reasonable and stable height, then built-up to height of at least 2100mm to form part of bicycle enclosure. Please Refer to Drawing: 4005-PEN-ZZ-ZZ-DR-A-3010-S4
- Boundary Type 09- Existing Railings
Existing metal palisade railings retained and painted. (Colour TBC)
- Boundary Type 10- New Railings to match existing
New metal palisade railings to match existing at front of site. (Colour TBC)
- New Gate
1800mm height timber gate to match timber fence.
- New Bicycle Enclosure
Please Refer to Drawing: 4005-PEN-ZZ-ZZ-DR-A-3010-S4
- New Bin Enclosure
Please Refer to Drawing: 4005-PEN-ZZ-ZZ-DR-A-3000-S4

Please Note:

All close board fencing or weld mesh fencing will provide either a continuous gap of at least 13cm between the ground and lowest edge of fencing or 13cm by 13cm gaps cut every 3m in such fencing

For clarity, the site boundary and tree canopies have been removed from drawing.

P1	Issued for Approval.	HG	LR	12.12.22
Rev.	Description	Drawn	Check	Date

FOR APPROVAL

pentan
architects

22 Cathedral Road
Cardiff CF11 9LJ
t. 029 2030 9010
info@pentan.co.uk

Project
Llysfaen

Client
Merthyr HA

Drawing Title

Proposed Boundary Plan (Upper Level)

Job no.	Org.	Zone	Level	Type	Role	Description	Status	Rev.
4004	-	PEN	-	ZZ	-	ZZ - DR - A - 1062	S4	P1
Scale				Date				
1 : 200				@ A2				Dec' 22

NOTES: Do not scale. All dimensions are in millimetres unless stated otherwise