


Q23 / 310 50 X 50 x 600 mm posts @
1 metre centres



NOTES:

1. Ensure that cross falls apply to all layers as laid down
2. When surface water has been absorbed, roll again with a 500kg roller
3. Water and roll within one week with a 500Kg roller (twice or two visits)
4. Maintain by watering and rolling for the first 3 months (a total of six visits)
5. Allow for cutting out and repairing within six months to the full specification any soft spots or areas of defects.

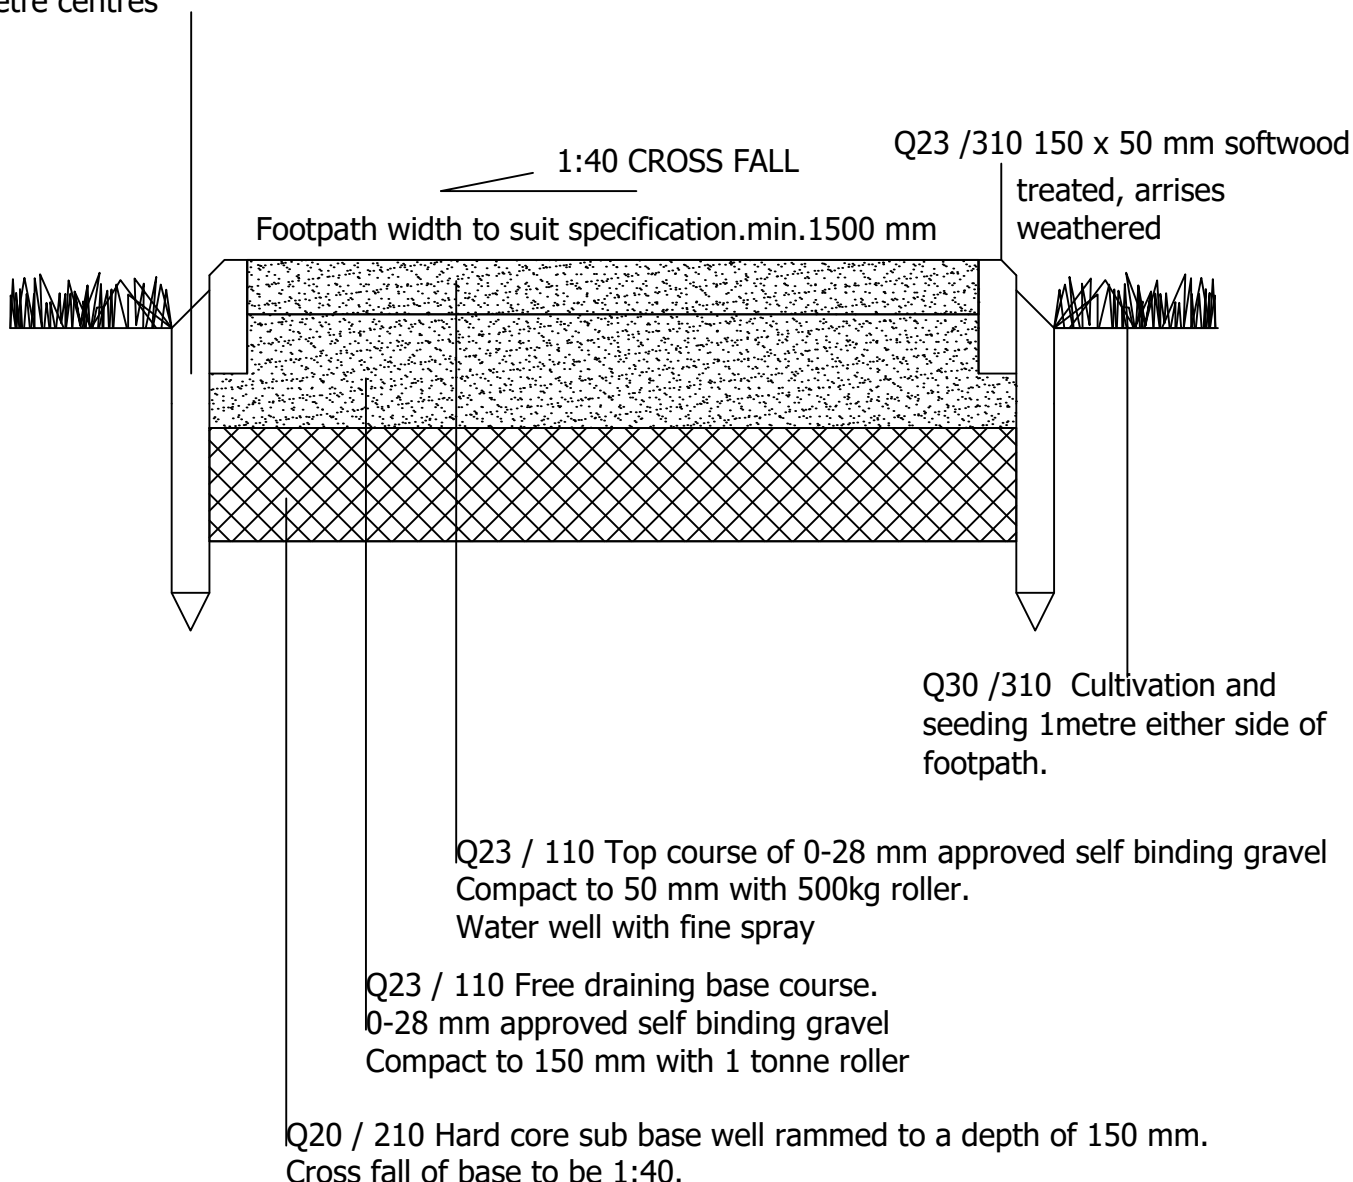

Judith Jones BA (Hons), BTP, MRTPI
Prif Swyddog Cynllunio a
Gwasanaethau Gymdogaeth
Chief Officer Planning &
Neighbourhood Services

PROJECT NAME:
Connecting and Restoring Open Spaces

PROJECT NO:
LA/01/056

SCALE:
1:10 @ A4

CHECKED:

DRAWING NAME:
Footpath Detail

DWG NO:
LA.01.056.035.07

REV NO: