


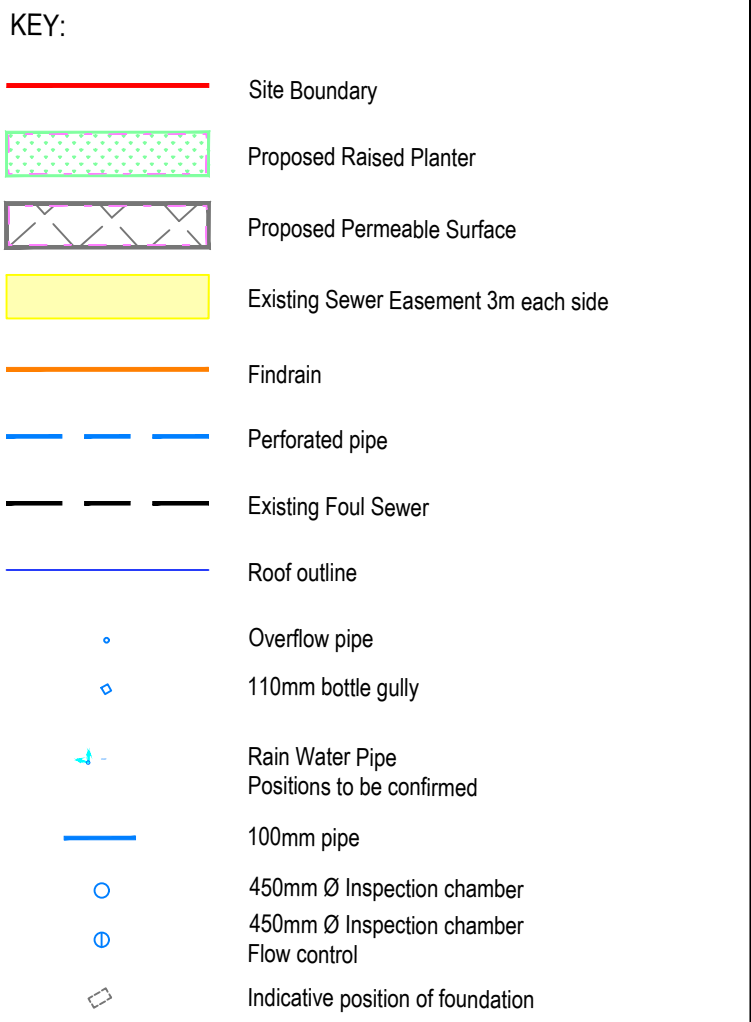

Please refer to drawings:

P5001266 - 05 - Construction Details

1. All levels area in metres above existing Datum (mAOD). All dimensions are shown in millimetres.

2. Do not scale from this drawing. Use figure dimensions only.

3. All existing assets to be protected during construction.

4. Contractor to confirm location and invert levels of all proposed connections to existing drainage systems prior to commencing work and report findings to the Overseeing Organisation.

5. All levels to be confirmed by the Contractor prior to construction.

6. The Contractor is to avoid undermining of any existing infrastructure during the works by allowing adequate protection.

7. Contractor to ensure existing downstream watercourses/drainage networks do not become blocked as a result of the works and that flow routes are maintained throughout the works via the use of methodology, timing and/or temporary works.

8. Contractor to allow for all necessary sill mitigation measures.

9. Contractor to agree all anchor points of liners with the Overseeing Organisation and to follow manufacturer guidance for installation.

10. SuDS Maintenance regime to be implemented in accordance with the recommendations within 'The SuDS Manual' (CIRIA C753) and manufacturer's guidance.

11. Existing drainage shown does not necessarily represent all existing drainage infrastructure within the area. That which is shown is an amalgamation of information from third party asset plans, topographical survey data and CCTV survey plans. As some of the information shown is based on third party asset plans, existing drainage infrastructure locations should be assumed as indicative only and will require confirmation by the Contractor should any work be required on/near these assets.

12. Foundation design, column positioning, RWP positioning is by others.

Existing sewer & easement added, PS updated	KF	26.08.26	3
General Arrangement updated	KF	12.08.26	2
Semi-Raised planter updated	KF	25.06.26	1

Manylion Adolygiad/Revision Details	Gan/By	Dyddiad/Date	Adolygiad/ Revision
-------------------------------------	--------	--------------	------------------------

Merthyr Tydfil
County Borough Council

Project/ Project
Abermorlais
Solar Car Park

Teil y Llan/ Dwg Title	
------------------------	--

SuDS Layout

Rhif y Proiect/ Project No. P5001266	Graddfa/ Scale @ A1 1:100	Dyddiad/ Date 26/08/26
Rhif y Llun/ Dwg No. P5001266_02	Adolygiad/ Revision P03	
Paratowyd gan/ Prepared by: KF	Gwirwyd gan/ Checked by: HC	Cymeradwywyd gan/Approved by: HC



Yr Is-adran Beirianneg/ Engineering Division
Merthyr Tudful Cynor Bwrdeistref Sirol/
Merthyr Tydfil County Borough Council
Uned 5/ Unit 5
Parc Busnes Triongl/ Triangle Business Parc
Pentrebach
Merthyr Tudful/ Merthyr Tydfil.
CF48 4TQ.
Ffôn/Fon: 01443 425001