
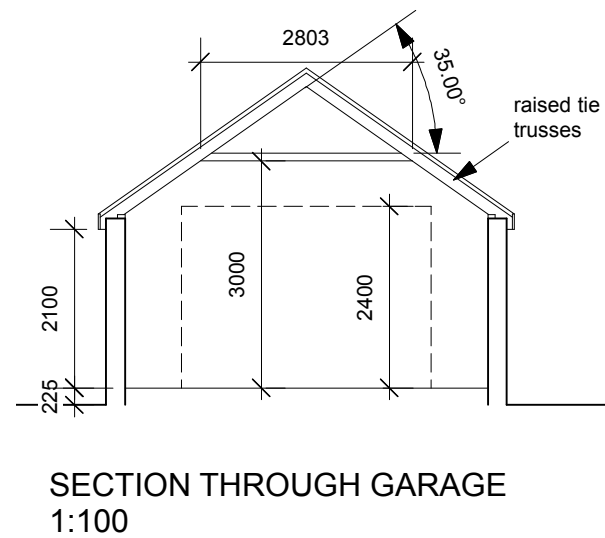
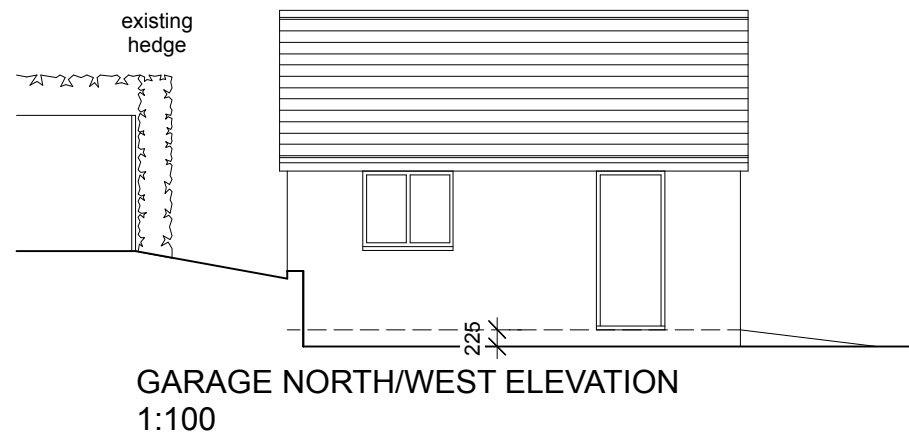
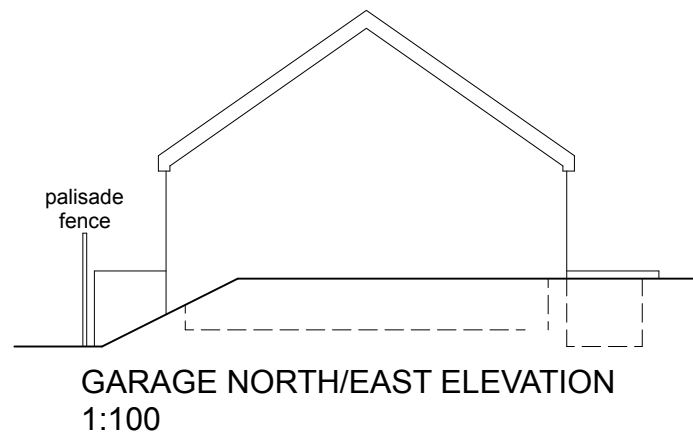
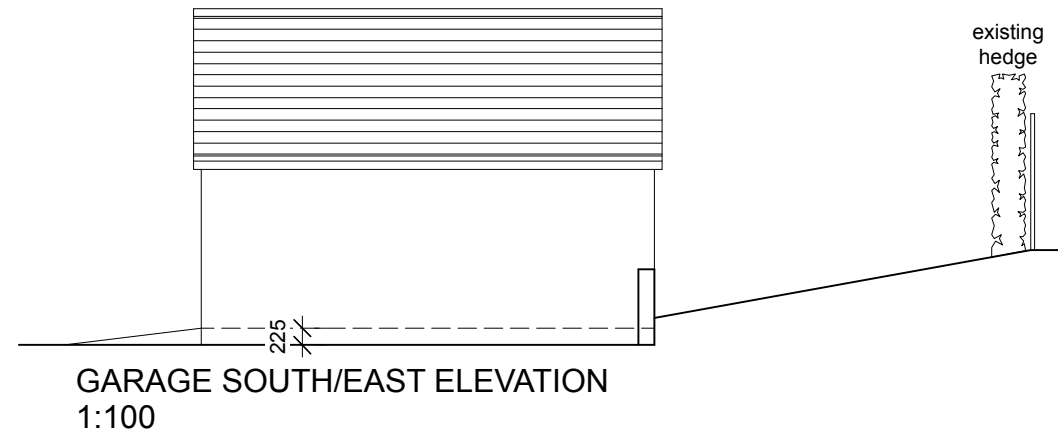


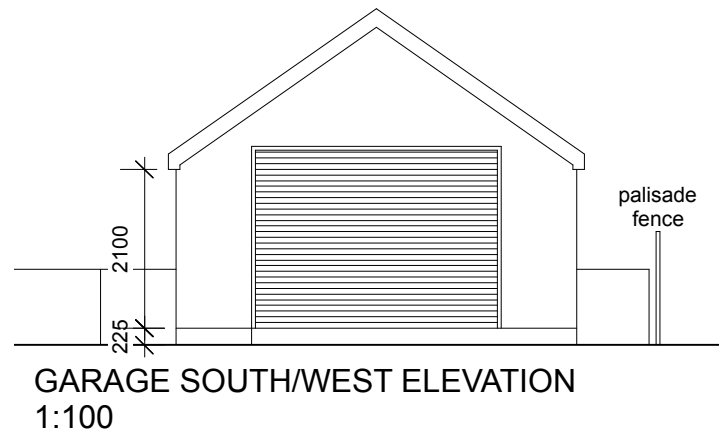

FINISHES

Walls	-	Blockwork with painted smooth render finish
Roof	-	Concrete tile
Side door	-	White upvc
Window	-	White upvc
Fascias and soffits	-	White upvc
Front door	-	Powder coated roller shutter
Drive	-	10/20 porous gravel

DRAINAGE

Storm water from garage roof to discharge into new soakaway, position of soakaway to be determined on site.

MST
DRAWING SERVICES

PROJECT

Proposed Garage
2 Cae Mari Dwn,
Merthyr Tydfil

DRAWING

PROPOSED ELEVATIONS

DATE

August 2022

SCALE

1:100 @ A3

DRAWING No.

SC06